

PROJECT NO.: 241072
 ORIGINAL ISSUE DATE: 10-24-2024


| NO. | DATE | DESCRIPTION |
|-----|----------|-------------------------|
| 1 | 11-04-24 | ISSUED FOR CITY REVIEW |
| 2 | 02-28-25 | REVISED PER CITY REVIEW |
| 3 | 04-11-25 | REVISED PER CITY REVIEW |


PROJECT MANAGER: DF
 DESIGNED BY: NB
 DRAWN BY: KS

EXISTING CONDITIONS PLAN
THE RESIDENCES AT
NAPERVILLE NAPER AND PLANK

7325 Janes Avenue
 Woodridge, IL 60517
 630.724.9200 phone
 www.v3co.com

DRAWING NO.
C1.0

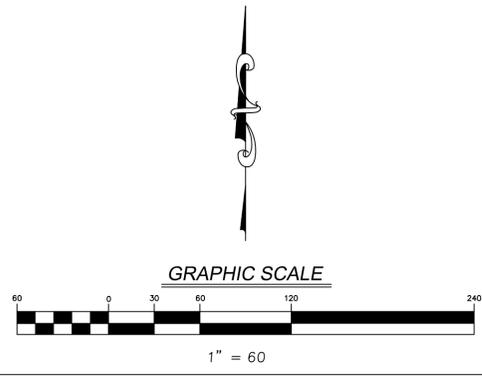

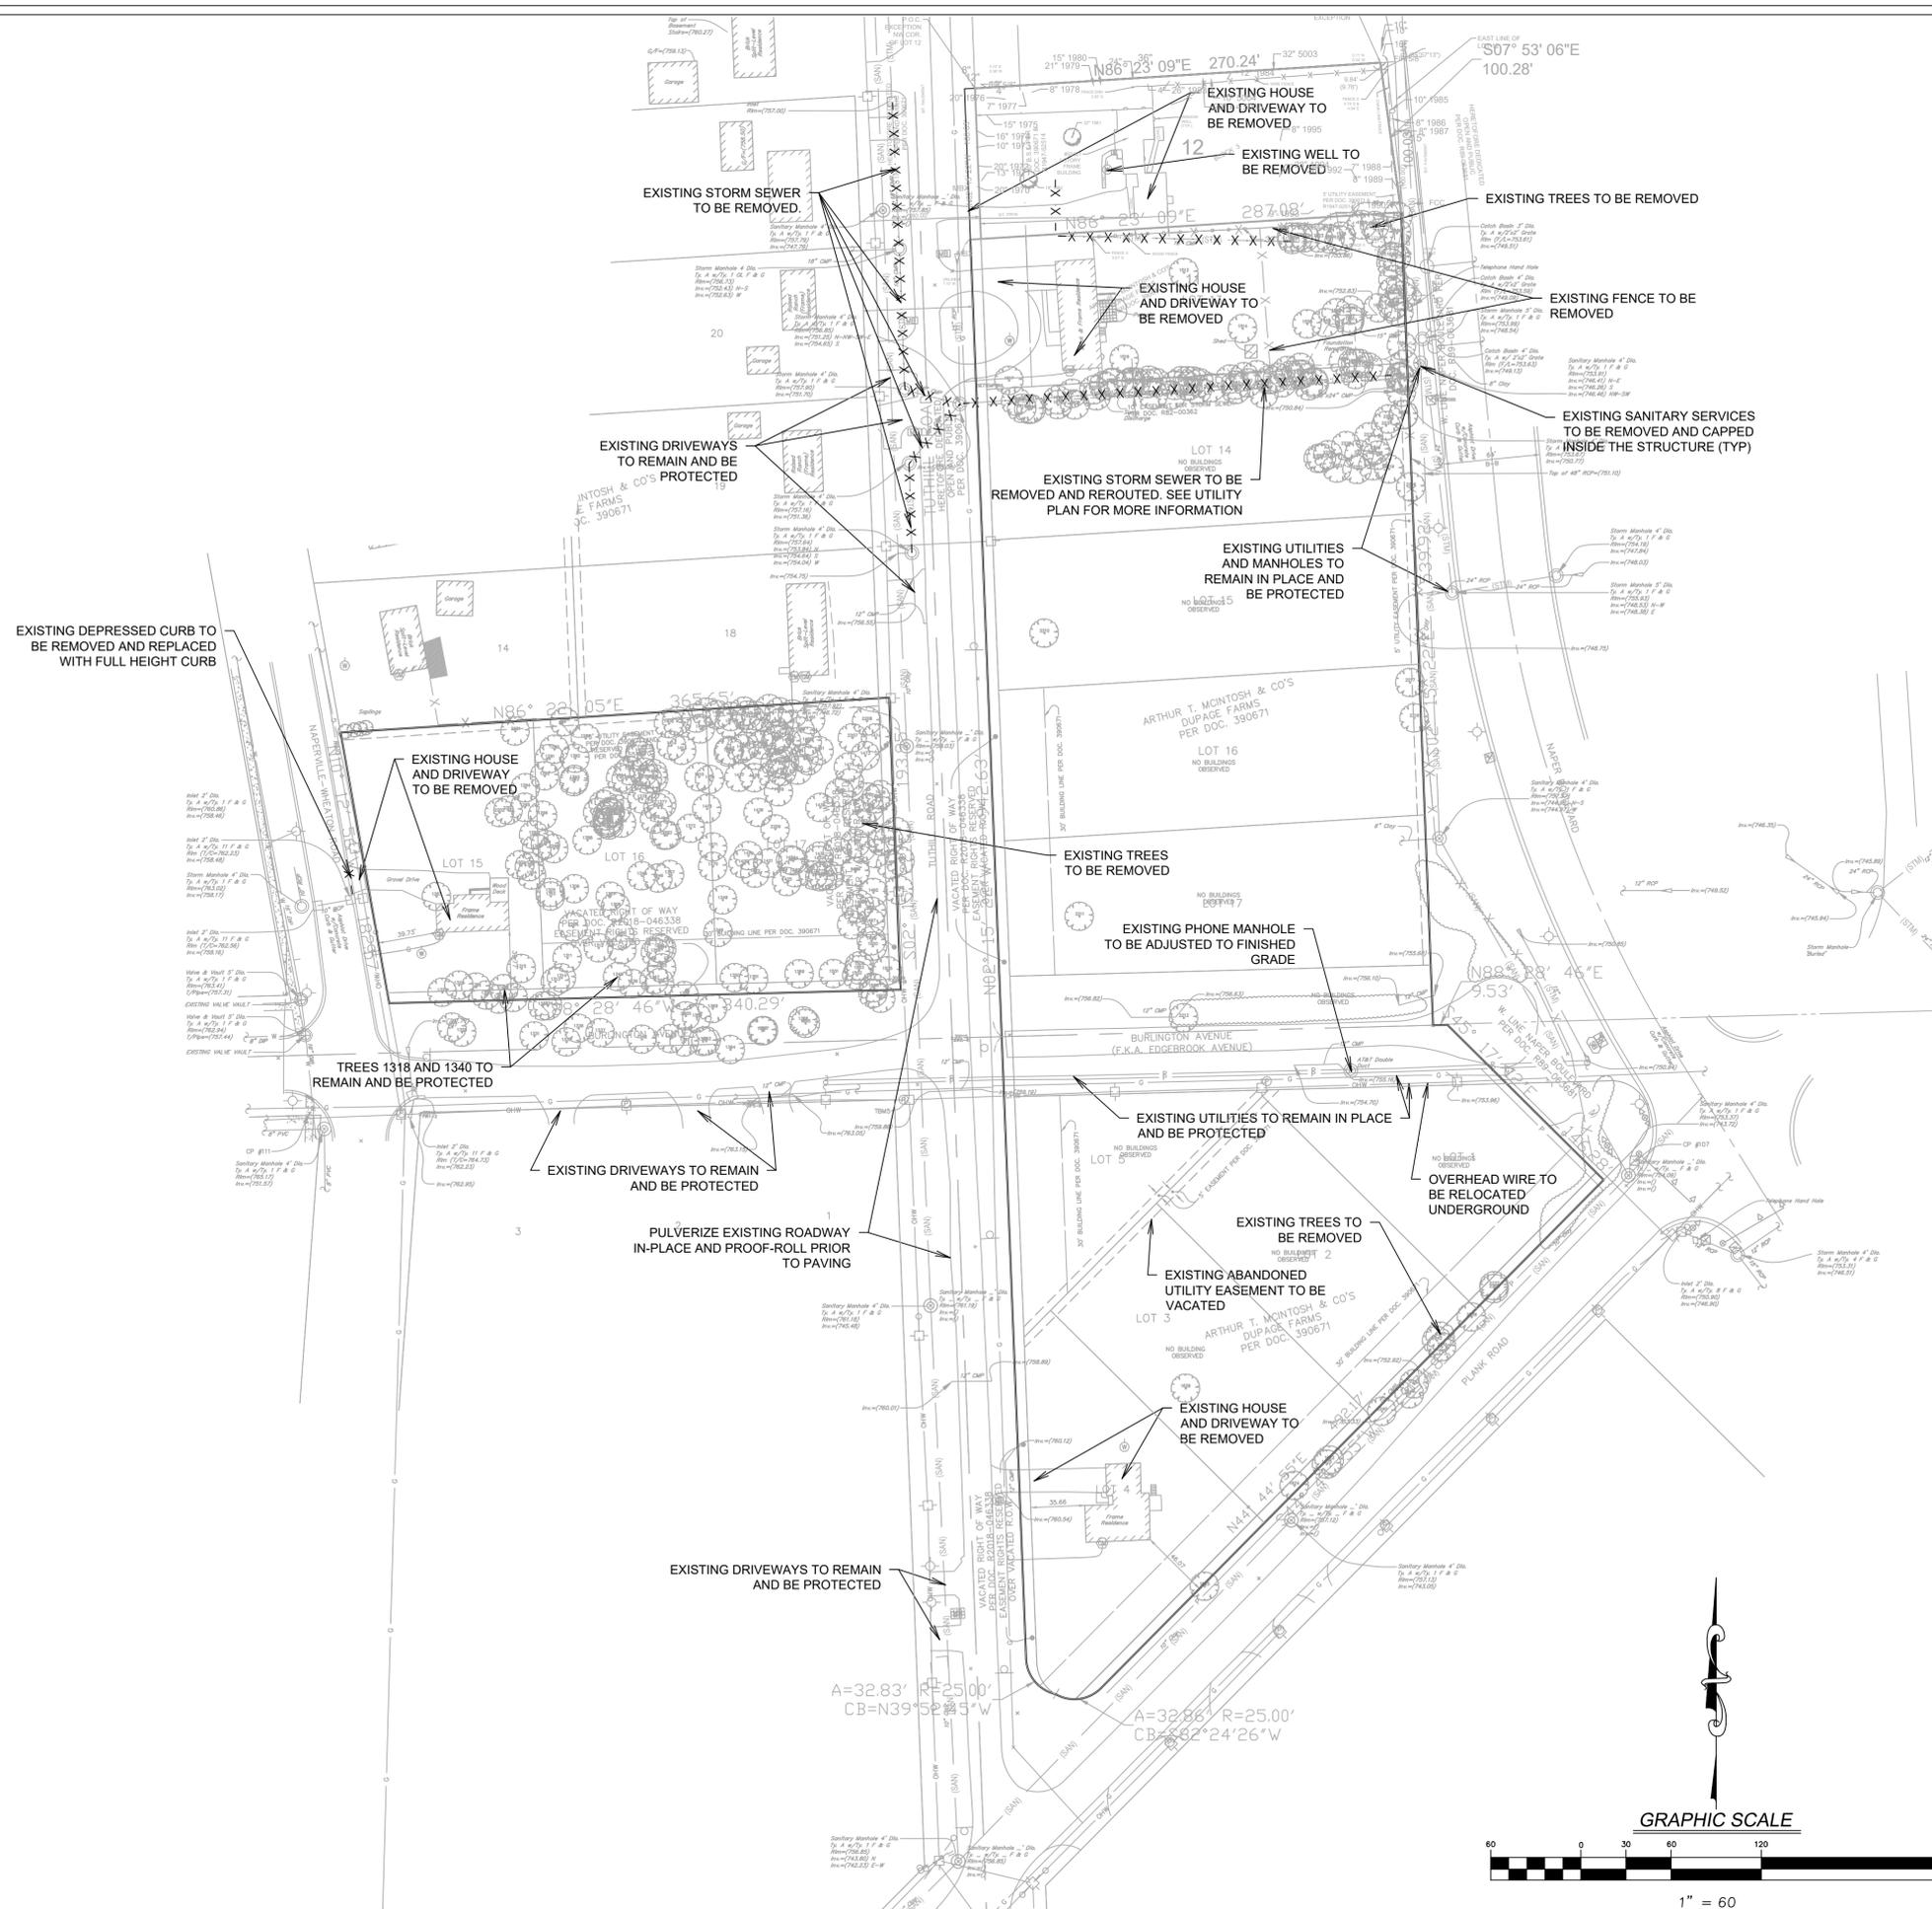

DEMOLITION PLAN

- THE EXTENT OF DEMOLITION WORK IS AS GENERALLY SHOWN ON THE CONSTRUCTION DOCUMENTS. SPECIFIC DEMOLITION PROCESSES OR PROCEDURES FOR DEMOLITION AND STRUCTURAL CONSIDERATIONS ARE THE RESPONSIBILITY OF OTHERS. DEMOLITION INCLUDES, BUT IS NOT LIMITED TO, REMOVAL AND DISPOSAL OFFSITE OF THE FOLLOWING ITEMS:
 - SIDEWALK AND ON-SITE PAVEMENT
 - BUILDINGS, FOUNDATIONS, AND SUPPORTING WALLS AND SLABS
 - UTILITIES
 - CONSTRUCTION DEBRIS
- ALL PAVEMENT TO BE REMOVED ADJACENT TO PAVEMENT THAT IS TO REMAIN SHALL BE SAWCUT FULL DEPTH AT THE EDGES PRIOR TO REMOVAL TO OBTAIN A "CLEAN" JOINT WHERE IT ABUTS NEW CURB OR PAVEMENT.
- CONTRACTOR MUST RECEIVE APPROVAL FROM CIVIL ENGINEER AND GEOTECHNICAL ENGINEER FOR THE MATERIAL TYPE AND USE IF CONTRACTOR DESIRES TO REUSE DEMOLISHED SITE PAVEMENT AS STRUCTURAL FILL.
- STRUCTURES TO BE DEMOLISHED SHALL BE VACATED AND DISCONTINUED FROM USE PRIOR TO START OF WORK. OWNER ASSUMES NO RESPONSIBILITY FOR ACTUAL CONDITION OF STRUCTURES TO BE DEMOLISHED. CONDITIONS EXISTING AT TIME OF INSPECTION FOR BIDDING PURPOSES WILL BE MAINTAINED BY OWNER IN SO FAR AS PRACTICABLE. HOWEVER, VARIATIONS WITHIN THE STRUCTURES MAY OCCUR BY OWNER'S REMOVAL AND SALVAGE OPERATIONS PRIOR TO START OF DEMOLITION WORK.
- ITEMS OF SALVAGEABLE VALUE TO CONTRACTOR MAY BE REMOVED AS WORK PROGRESSES AND AS APPROVED BY THE OWNER. SALVAGED ITEMS MUST BE TRANSPORTED FROM THE SITE AS THEY ARE REMOVED. STORAGE OR SALE OF REMOVED ITEMS ON SITE WILL NOT BE PERMITTED.
- CONDUCT DEMOLITION OPERATIONS AND REMOVAL OF DEBRIS IN SUCH A MANNER TO ENSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS AND OTHER ADJACENT FACILITIES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTION OF BUILDINGS, PAVEMENTS AND UTILITIES TO REMAIN FROM ANY DAMAGE AND SHALL BE RESPONSIBLE FOR REPAIRING THE SAME.
- EXISTING UTILITIES, WHICH DO NOT SOLELY SERVICE STRUCTURES BEING DEMOLISHED, ARE TO BE KEPT IN SERVICE AND PROTECTED AGAINST DAMAGE DURING DEMOLITION OPERATIONS. CONTRACTOR SHALL ARRANGE FOR SHUT-OFF OF UTILITIES SERVING STRUCTURES TO BE DEMOLISHED. CONTRACTOR IS RESPONSIBLE FOR TURNING OFF, DISCONNECTING, AND SEALING INDICATED UTILITIES BEFORE STARTING DEMOLITION OPERATIONS.
- EXISTING UTILITIES TO BE ABANDONED ARE TO BE CAPPED AT BOTH ENDS AND FILLED WITH FA-1 OR APPROVED EQUAL. ALL UNDERGROUND UTILITIES TO BE REMOVED ARE TO HAVE THEIR TRENCHES BACKFILLED WITH ENGINEERED FILL OR SELECT EXCAVATED MATERIAL, AS APPROVED BY THE GEOTECHNICAL ENGINEER, TO 95% OF MODIFIED PROCTOR DENSITY.
- ALL PRIVATE UTILITIES (ELECTRIC, CABLE, TELEPHONE, FIBER OPTIC, GAS) SHALL BE REMOVED AND RELOCATED PER THE UTILITY OWNER AND THE LOCAL MUNICIPALITY'S REQUIREMENTS.
- CONTRACTOR SHALL LOCATE AND PROTECT EXISTING UNDERGROUND AND OVERHEAD UTILITIES DURING CONSTRUCTION. UTILITY PROTECTION SHALL BE COORDINATED WITH THE RESPECTIVE UTILITY OWNER AND THE GOVERNING MUNICIPALITY. DAMAGED CABLES/CONDUITS SHALL BE REPLACED IMMEDIATELY. ALL EXISTING STRUCTURES TO REMAIN SHALL BE PROTECTED THROUGHOUT THE CONSTRUCTION PROCESS. ALL DAMAGED STRUCTURES SHALL BE REPLACED IN-KIND AND THEIR REPLACEMENT COST SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
- REMOVAL, ABANDONMENT, AND RELOCATION OF EXISTING UTILITIES SHALL BE COMPLETED AS GENERALLY DEPICTED ON THESE PLANS. CONTRACTOR TO COORDINATE RELOCATIONS WITH THE UTILITY OWNER. CONTRACTOR SHALL MINIMIZE DISRUPTION OF SERVICE AND SHALL WORK WITH UTILITY OWNER TO MAINTAIN AN ACCEPTABLE LEVEL OF SERVICE.
- USE WATER SPRINKLING, TEMPORARY ENCLOSURES, AND OTHER SUITABLE METHODS TO MINIMIZE DUST AND DIRT FROM RISING AND SCATTERING IN THE AIR. COMPLY WITH ALL GOVERNING REGULATIONS PERTAINING TO ENVIRONMENTAL PROTECTION.
- DEMOLITION DEBRIS SHALL BE REMOVED FROM THE SITE AND DISPOSED OF IN A LEGAL MANNER.
- COMPLETELY FILL BELOW-GRADE AREAS AND VOIDS RESULTING FROM DEMOLITION TO THE FINAL LINES AND GRADES SHOWN ON THE CONTRACT DOCUMENTS. BACKFILL MATERIAL SHALL BE IDOT APPROVED AGGREGATE (CA-6) OR APPROVED EQUAL.
- SEE LANDSCAPE PLANS FOR INFORMATION ON LANDSCAPE AND TREE PROTECTION, PRESERVATION, AND REMOVAL.
- EXISTING MONITORING WELLS ARE TO BE REMOVED AS NECESSARY AND SEALED BY STATE LICENSED WELL DRILLER PER ILLINOIS DEPARTMENT OF PUBLIC HEALTH REQUIREMENTS AND/OR LOCAL/COUNTY REQUIREMENTS.
- THESE DRAWINGS DO NOT INCLUDE THE REMOVAL OF UNDERGROUND STORAGE TANKS. SHOULD UNDERGROUND STORAGE TANKS BE ENCOUNTERED, CONTRACTOR TO CONTACT OWNER AND ENGINEER TO DETERMINE RESPONSIBILITY FOR ANY ENVIRONMENTAL REMEDIATION OR REMOVAL WORK AS NECESSARY. ANY REMOVAL OF UNDERGROUND STORAGE TANKS MUST BE IN CONFORMANCE WITH LOCAL AND STATE STANDARDS.
- ANY SEPTIC FIELD OR WELL THAT IS TO BE ABANDONED AS PART OF THIS DEVELOPMENT MUST BE TERMINATED PER COUNTY HEALTH REGULATIONS AND DOCUMENTATION FORWARDED TO THE WATER DEPARTMENT.


| REVISIONS | | NO. | DATE | DESCRIPTION |
|-----------|----------|-------------------------|------|-------------|
| 1 | 11-04-24 | ISSUED FOR CITY REVIEW | | |
| 2 | 02-26-25 | REVISED PER CITY REVIEW | | |
| 3 | 04-11-25 | REVISED PER CITY REVIEW | | |

PROJECT NO.: 241072
 ORIGINAL ISSUE DATE: 10-24-2024
 PROJECT MANAGER: DF
 DESIGNED BY: NB
 DRAWN BY: KS
 IL

DEMOLITION PLAN
THE RESIDENCES AT
NAPER AND PLANK
 NAPERVILLE

7325 Janes Avenue
 Woodridge, IL 60517
 630.724.9200 phone
 www.v3co.com

DRAWING NO.
C2.0

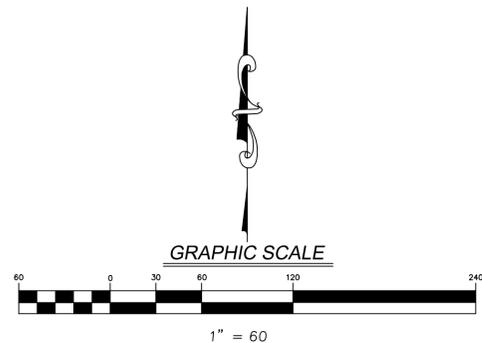

PAVING LEGEND

BITUMINOUS PAVEMENT (LIGHT DUTY)(SN = 2.50)

- 2" BITUMINOUS CONCRETE SURFACE COURSE
- 2" HOT MIX ASPHALT BINDER COURSE
- 8" COMPACTED AGGREGATE BASE COURSE, TYPE B, CA-6, GRADE 8 OR 9

BITUMINOUS PAVEMENT (PUBLIC ROADWAY)(SN = 3.00)



- 2" BITUMINOUS CONCRETE SURFACE COURSE
- 3.5" HOT MIX ASPHALT BINDER COURSE
- 8" COMPACTED AGGREGATE BASE COURSE, TYPE B, CA-6, GRADE 8 OR 9

CONCRETE PAVEMENT (SN = 3.52)


- 6" P.C. CONCRETE PAVEMENT W/ W6.5XW4 WELDED WIRE FABRIC
- 4" COMPACTED AGGREGATE BASE COURSE TYPE B, CA-6, GRADE 8 OR 9

CONCRETE SIDEWALK (SN = 2.26)

- 4" P.C. CONCRETE PAVEMENT
- 2" COMPACTED AGGREGATE BASE COURSE TYPE B, CA-6, GRADE 8 OR 9

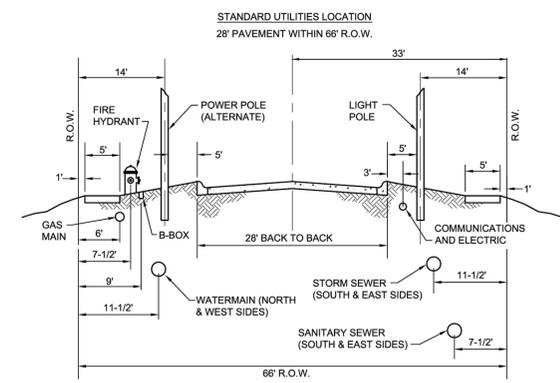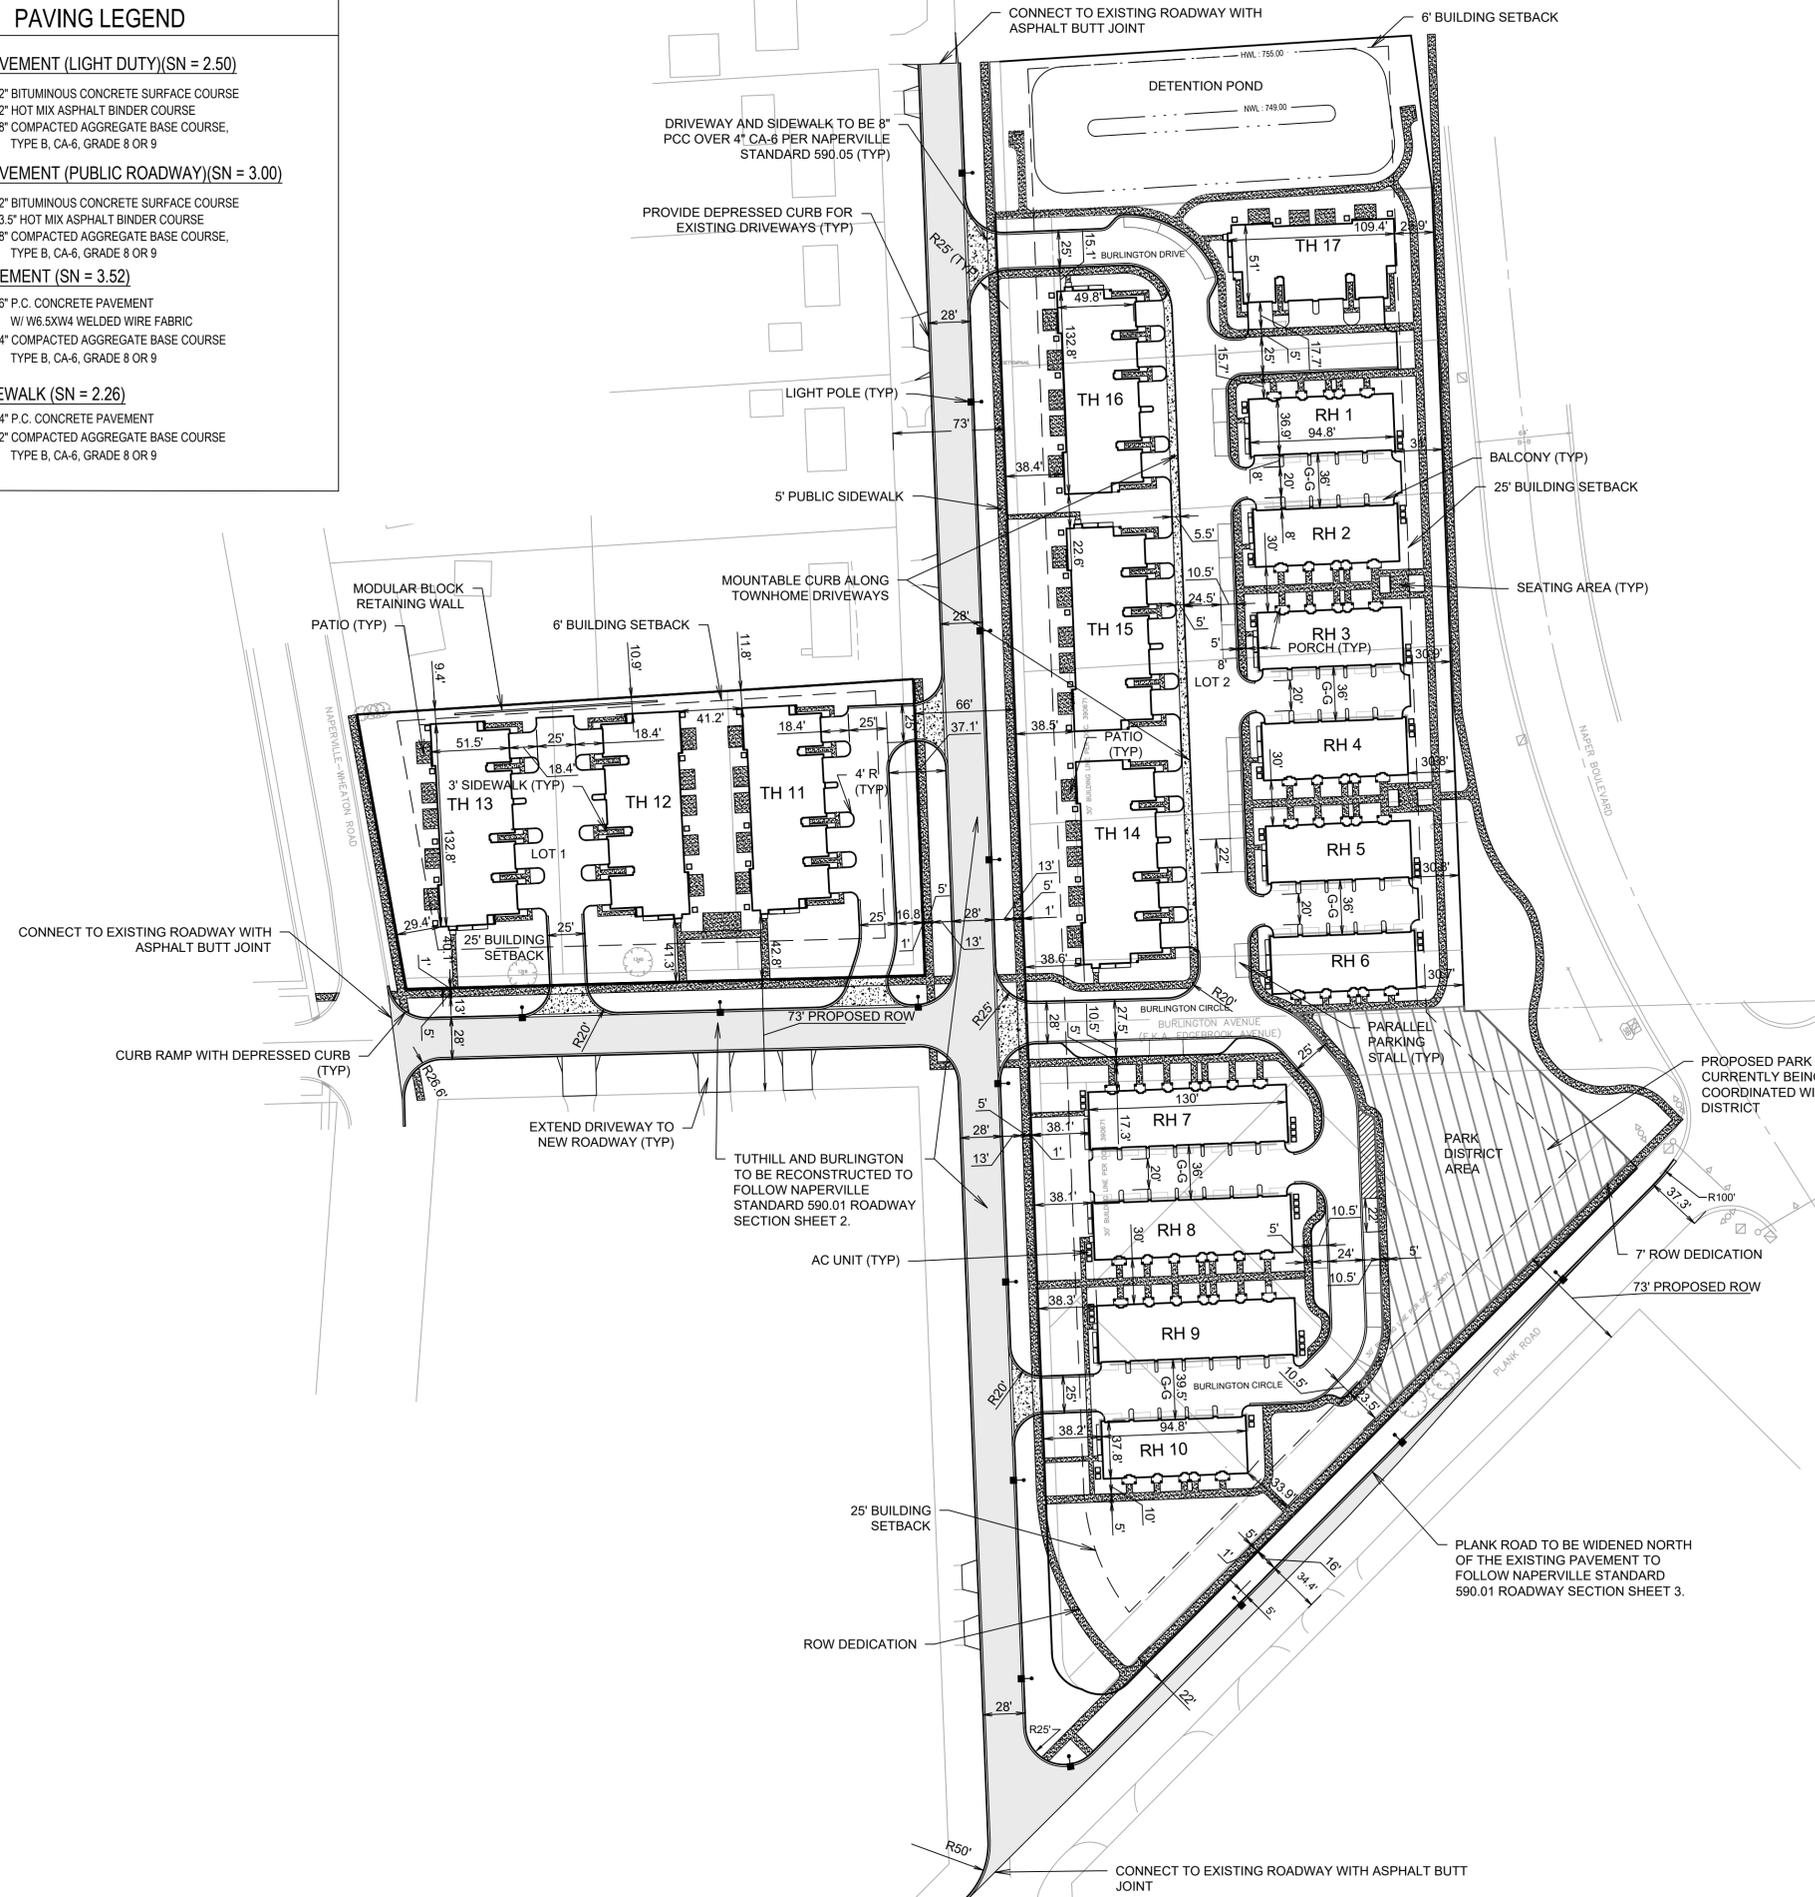

City of Naperville
STANDARD ROADWAY SECTION
PAVEMENT 1
SHEET 2 OF 4
590.01

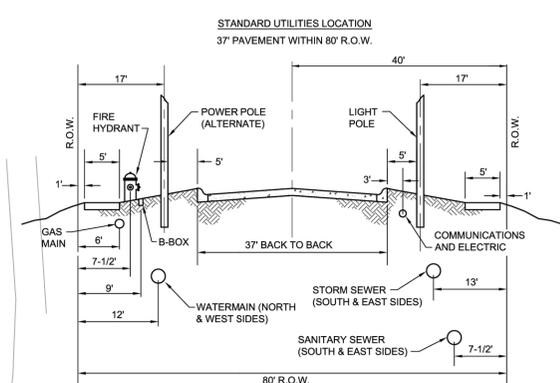


City of Naperville
STANDARD ROADWAY SECTION
PAVEMENT 1
SHEET 3 OF 4
590.01

- NOTES:**
- ALL DIMENSIONS SHOWN ARE TO BACK OF CURB UNLESS OTHERWISE NOTED.
 - ALL PROPOSED ON-SITE STRIPING SHALL BE PAINTED YELLOW UNLESS OTHERWISE NOTED.
 - BUILDING DIMENSIONS ARE TO OUTSIDE FACE OF BUILDING UNLESS OTHERWISE NOTED.
 - ALL CURB AND GUTTER SHALL BE B6.12 UNLESS OTHERWISE NOTED.
 - DRIVEWAYS AND PARKING AREAS TO BE 4" ASPHALT OVER 8" CA6 (SN = 2.50).
 - BURLINGTON AND TUTHILL ROADS TO BE 5.5" ASPHALT OVER 8" CA6 (SN = 3.00).

SITE DATA

| |
|--|
| LOT1 AREA = 1.52 AC(66,155 SF) |
| 3 TOWNHOME BUILDINGS - 15 UNITS PARKING REQUIRED: 2 PARKING SPACES PER DWELLING UNIT PLUS 0.25 GUESTS PARKING SPACES (34) PROVIDED: 60 PARKING SPACES, 30 GARAGE SPACES, 30 DRIVEWAY SPACES |
| LOT2 AREA = 6.56 AC(285,743 SF) |
| 4 TOWNHOME BUILDINGS - 19 UNITS PARKING REQUIRED: 2 PARKING SPACES PER DWELLING UNIT PLUS 0.25 GUESTS PARKING SPACES (43) PROVIDED: 76 PARKING SPACES, 38 GARAGE SPACES, 38 DRIVEWAY SPACES |
| 10 ROWHOME BUILDINGS - 56 UNITS PARKING REQUIRED: 2 PARKING SPACES PER DWELLING UNIT PLUS 0.25 GUESTS PARKING SPACES (126) PROVIDED: 138 PARKING SPACES, 112 GARAGE SPACES, 26 STREET SPACES |

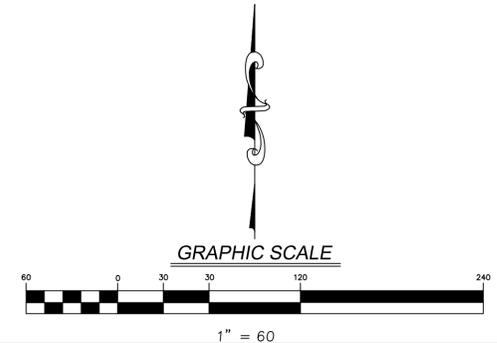

PRELIMINARY LAYOUT AND PAVING PLAN
THE RESIDENCES AT NAPERVILLE NAPER AND PLANK

PROJECT NO.: 241072
PROJECT MANAGER: DF
DESIGNED BY: NB
DRAWN BY: KS


ORIGINAL ISSUE DATE: 10-24-2024

| NO. | DATE | DESCRIPTION |
|-----|----------|-------------------------|
| 1 | 11-04-24 | ISSUED FOR CITY REVIEW |
| 2 | 02-26-25 | REVISED PER CITY REVIEW |
| 3 | 04-11-25 | REVISED PER CITY REVIEW |

DRAWING NO. **C2.1**

7325 Janes Avenue
Woodridge, IL 60517
630.724.9200 phone
www.v3co.com

N:\2024\241072\Drawings\ACAD\LD\ISO3\Sheet Drawings\C2.1 Lay241072.dwg 4/11/2025

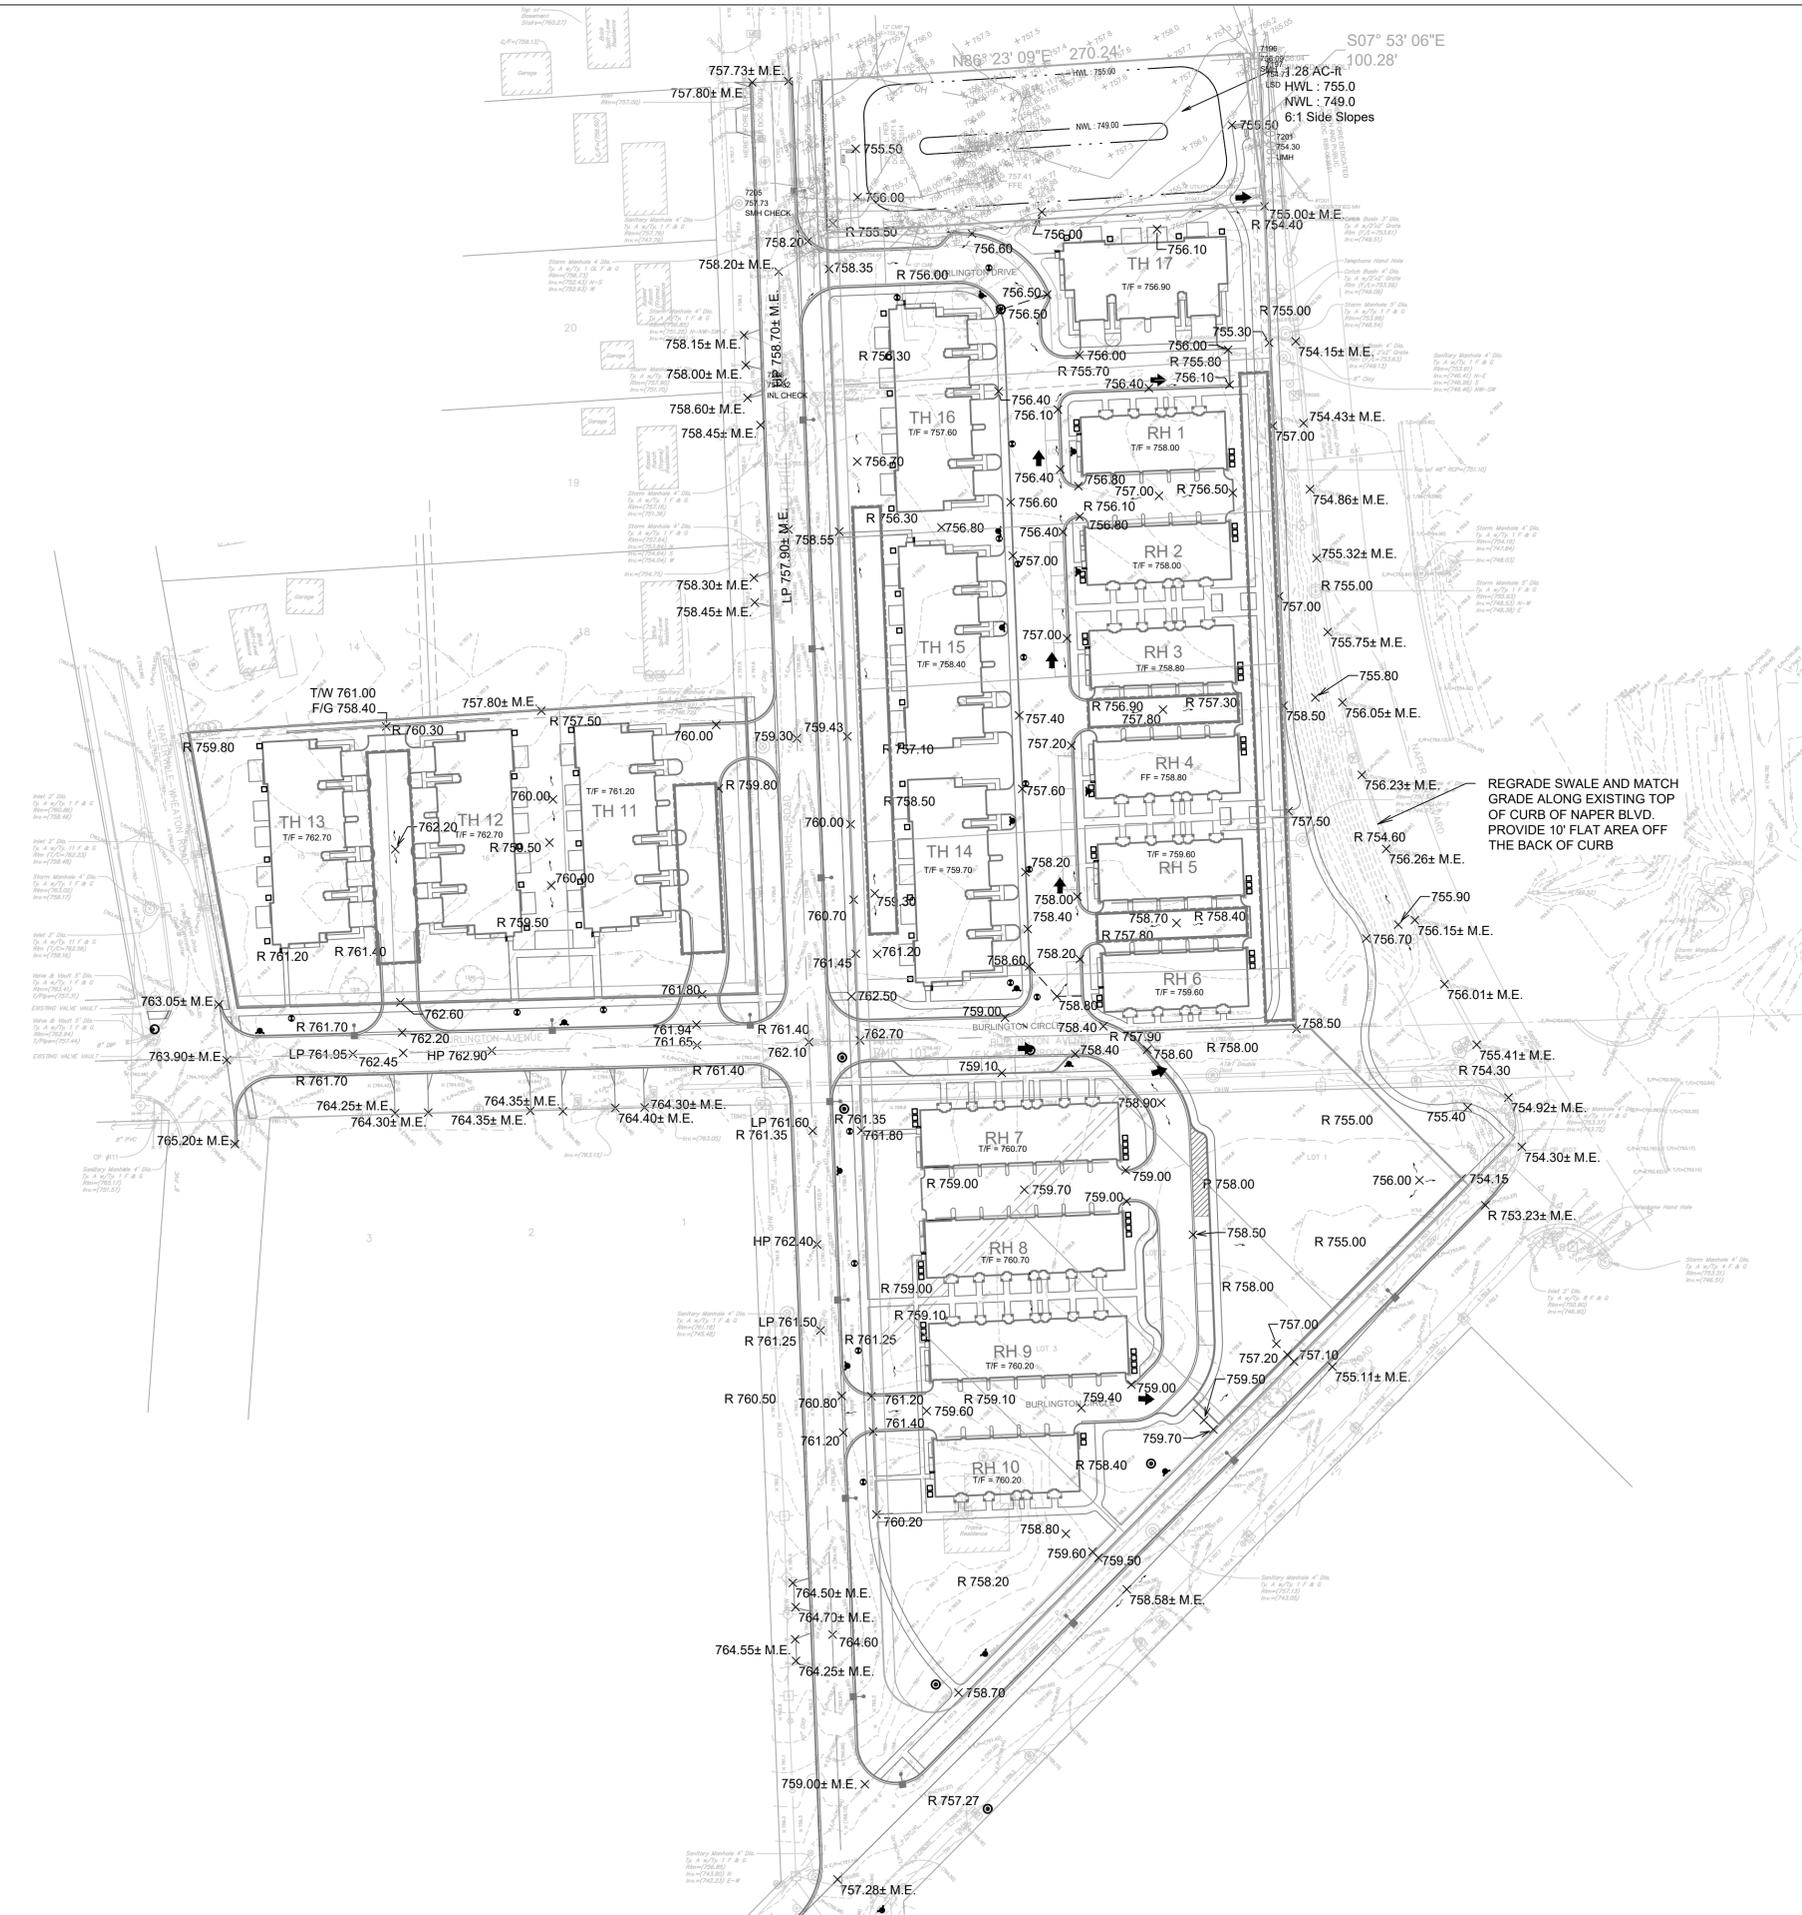

- NOTES:
- ALL PAVEMENT SPOT GRADE ELEVATIONS AND RIM ELEVATIONS WITHIN OR ALONG CURB AND GUTTER REFER TO EDGE OF PAVEMENT ELEVATIONS UNLESS OTHERWISE NOTED.
 - ALL ELEVATIONS SHOWN DEPICT FINISHED GRADE UNLESS OTHERWISE NOTED. SUBTRACT TOPSOIL THICKNESS OR PAVEMENT SECTION TO ESTABLISH SUBGRADE ELEVATIONS.
 - PROVIDE 1.50% CROSS SLOPE AND 4.00% MAXIMUM LONGITUDINAL SLOPE ON ALL SIDEWALKS AND PEDESTRIAN PATHS UNLESS OTHERWISE INDICATED. PLEASE NOTE THAT THE ILLINOIS ACCESSIBILITY CODE REQUIRES A MAXIMUM CONSTRUCTED CROSS SLOPE OF 2.00% AND LONGITUDINAL SLOPE OF 5.00%.

DETENTION SUMMARY:
 TOTAL SITE AREA: 8.08 AC
 DETENTION VOLUME REQUIRED: 3.64 AC-FT
 DETENTION VOLUME PROVIDED: 3.675 AC-FT
 - 0.696 AC-FT IN WESTERN PARCEL CHAMBERS
 - 1.699 AC-FT IN EASTERN PARCEL CHAMBERS
 - 1.280 AC-FT IN DETENTION POND

POST-CONSTRUCTION BEST MANAGEMENT PRACTICE SUMMARY:
 BMP VOLUME REQUIRED: 0.470 AC-FT
 BMP VOLUME PROVIDED IN UNDERGROUND CHAMBERS: 0.470 AC-FT


REGRADE SWALE AND MATCH GRADE ALONG EXISTING TOP OF CURB OF NAPER BLVD. PROVIDE 10' FLAT AREA OFF THE BACK OF CURB

| REVISIONS | | DESCRIPTION |
|-----------|----------|-------------------------|
| NO. | DATE | |
| 1 | 11-04-24 | ISSUED FOR CITY REVIEW |
| 2 | 02-26-25 | REVISED PER CITY REVIEW |
| 3 | 04-11-25 | REVISED PER CITY REVIEW |

PRELIMINARY GRADING PLAN
THE RESIDENCES AT
NAPERVILLE NAPER AND PLANK

7325 Janes Avenue
 Woodridge, IL 60517
 630.724.9200 phone
 www.v3co.com


DRAWING NO.
C3.0

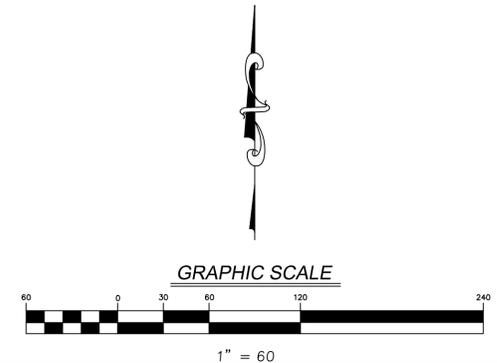

GRAPHIC SCALE

1" = 60'

FOR CONTINUATION SEE SHEET C4.1

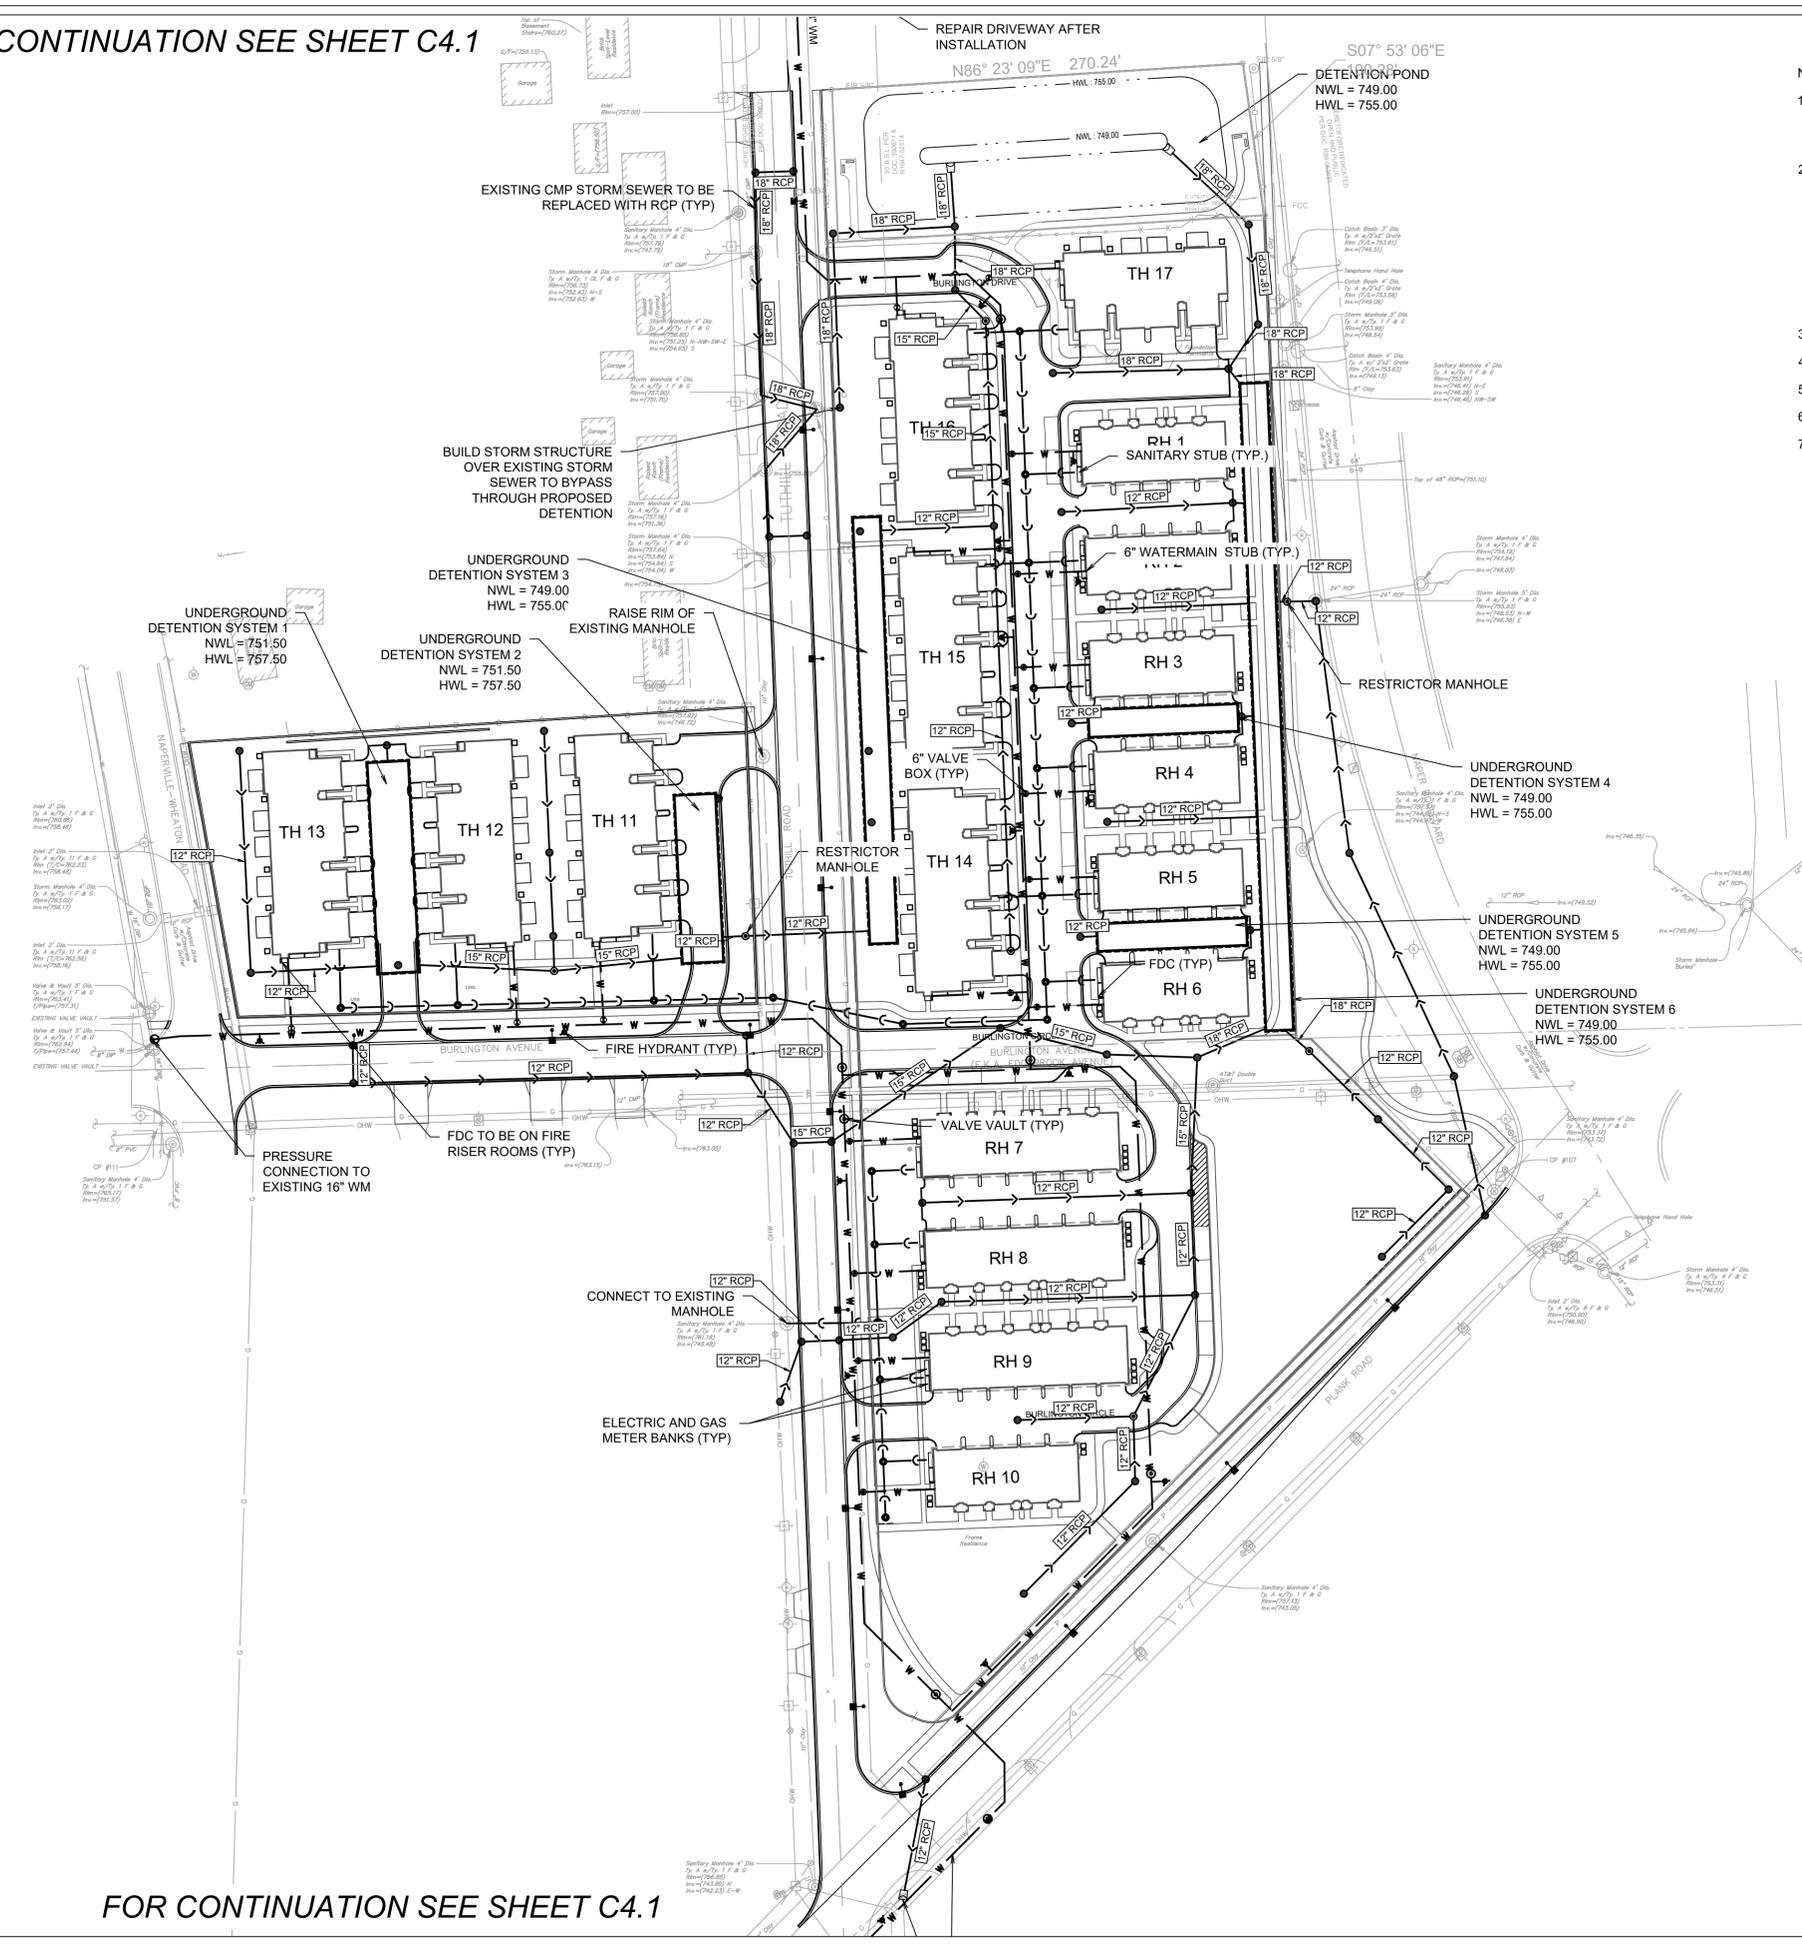

- NOTES:
- CONTRACTOR TO FIELD VERIFY LOCATION, INVERT, AND SIZE OF ALL EXISTING UTILITIES PRIOR TO ORDERING MATERIALS OR BEGINNING UTILITY WORK. CONTRACTOR TO NOTIFY ENGINEER OF ANY DISCREPANCIES IMMEDIATELY.
 - UNLESS INDICATED OTHERWISE, FRAME AND OPEN LID STORM STRUCTURES IN PAVEMENT SHALL BE NEENAH R-2502 WITH TYPE D LID OR APPROVED EQUAL, AND FRAME AND CLOSED LID STORM STRUCTURES IN PAVEMENT SHALL BE NEENAH R-1772 OR APPROVED EQUAL. FRAME AND OPEN LID STORM STRUCTURES IN OPEN SPACE SHALL BE R-4340-B OR APPROVED EQUAL. ALL FRAME AND GRATES SHALL CONFORM TO LOCAL MUNICIPALITY REQUIREMENTS. FRAME AND CLOSED LID STORM STRUCTURES LOCATED WITHIN AN ACCESSIBLE ROUTE SHALL BE "NEENAH R-1772 WITH TYPE C LID (OR EQUIVALENT) WITH PERMA-GRIP SURFACE. DRILL 1 - 1" DIAMETER LIFT HOLE INSTEAD OF A STANDARD PICK HOLE."
 - ALL WATER SERVICES TO BE 6" DIP COMBINED FIRE AND DOMESTIC
 - ALL SANITARY SERVICES FROM INDIVIDUAL BUILDINGS TO BE 6" PVC SDR 26.
 - ALL DOWNSPOUT CONNECTIONS TO BE 4" PVC SDR 26.
 - PUBLIC WATERMAIN TO BE 8" DIP CL 52 WITH CEMENT LINING.
 - SHARED/PUBLIC SANITARY SEWER TO BE 8" PVC SDR 26.


| REVISIONS | | NO. | DATE | DESCRIPTION |
|-----------|----------|-------------------------|------|-------------|
| 1 | 11-04-24 | ISSUED FOR CITY REVIEW | | |
| 2 | 02-28-25 | REVISED PER CITY REVIEW | | |
| 3 | 04-11-25 | REVISED PER CITY REVIEW | | |

PROJECT NO.: 241072
 ORIGINAL ISSUE DATE: 10-24-2024
 PROJECT MANAGER: DF
 DESIGNED BY: NB
 DRAWN BY: KS

PRELIMINARY UTILITY PLAN
THE RESIDENCES AT
NAPERVILLE NAPER AND PLANK

7325 Janes Avenue
 Woodridge, IL 60517
 630.724.9200 phone
 www.v3co.com

DRAWING NO.
C4.0

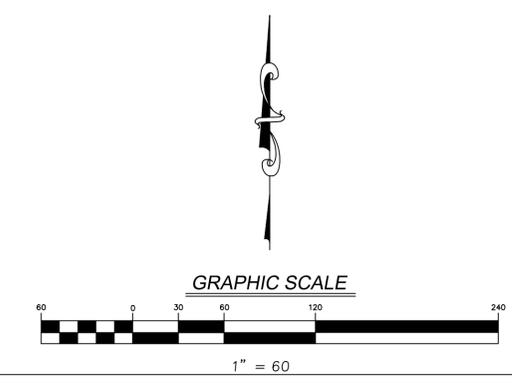

FOR CONTINUATION SEE SHEET C4.1

