



**PLANT SCHEDULE**


SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	CONT	CAL
<b>TREES</b>					
	GB	3	GINKGO BILOBA / MAIDENHAIR TREE	B & B	2.5" CAL MIN
	TS	2	TILIA TOMENTOSA 'STERLING' / STERLING SILVER LINDEN	B & B	2.5" CAL MIN
	UA	3	ULMUS X 'ACCOLADE' / ACCOLADE ELM	B & B	2.5" CAL MIN
<b>ORNAMENTAL TREES</b>					
	CC	2	CERCIS CANADENSIS / EASTERN REDBUD	B & B	2.5" CAL MIN
<b>SHRUBS</b>					
	AO	3	AMELANCHIER ALNIFOLIA 'OBELISK' / STANDING OVATION™ SERVICEBERRY	-	SEE PLAN
	AM	6	ARONIA MELANOCARPA X 'UCONNAM165' / LOW SCAPE MOUND BLACK CHOKEBERRY	-	SEE PLAN
	CS	5	CORNUS SERICEA 'CARDINAL' / CARDINAL RED TWIG DOGWOOD	-	SEE PLAN
	DS	4	DIERVILLA RIVULARIS 'SMDNDRSF' / KODIAK BLACK BUSH HONEYSUCKLE	-	SEE PLAN
	HL	15	HYDRANGEA PANICULATA 'LITTLE LIME' / LITTLE LIME HYDRANGEA	-	SEE PLAN
	IL	3	ITEA VIRGINICA 'LITTLE HENRY' TM / VIRGINIA SWEETSPIRE	-	SEE PLAN
	JF	24	JUNIPERUS CHINENSIS 'KALLAY'S COMPACT' / KALLAY'S COMPACT PFITZER JUNIPER	-	SEE PLAN
	RG	4	RHUS AROMATICA 'GRO-LOW' / GRO-LOW FRAGRANT SUMAC	-	SEE PLAN
	SV	6	SYRINGA VULGARIS 'CHARLES JOLY' / CHARLES JOY LILAC	-	SEE PLAN
	TM	11	TAXUS X MEDIA 'HICKSI' / HICKS YEW	-	SEE PLAN
	VA	13	VIBURNUM DENTATUM 'CHRISTOM' / BLUE MUFFIN® ARROWWOOD VIBURNUM	1 GAL.	SEE PLAN
<b>GRASSES</b>					
	CK	18	CALAMAGROSTIS X ACUTIFLORA 'KARL FOERSTER' / FEATHER REED GRASS	1 GAL.	SEE PLAN
	PB	12	PENNISETUM ALOPECUROIDES 'BURGUNDY BUNNY' / BURGUNDY BUNNY DWARF FOUNTAIN GRASS	1 GAL.	SEE PLAN
<b>PERENNIALS AND GRASSES</b>					
	AS2	17	ALLIUM X 'SUMMER BEAUTY' / SUMMER BEAUTY ALLIUM	1 GAL.	18" O.C.
	HO	19	HEMEROCALLIS X 'STELLA DE ORO' / STELLA DE ORO DAYLILY	1 GAL.	18" O.C.
	DV	23	THYMUS X 'DOONE VALLEY' / DOONE VALLEY THYME	1 GAL.	12" O.C.
<b>GROUND COVERS</b>					
	SOD		TURF SOD / TURF SOD UP TO LIMITS OF DISTURBANCE	SOD	

**LANDSCAPE NOTES**

- THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING MATERIALS AND PLANTS SHOWN ON THE LANDSCAPE PLAN. THE CONTRACTOR IS RESPONSIBLE FOR THE COST TO REPAIR UTILITIES, ADJACENT LANDSCAPE, PUBLIC AND PRIVATE PROPERTY THAT IS DAMAGED BY THE CONTRACTOR OR THEIR SUBCONTRACTOR'S OPERATIONS DURING INSTALLATION OR DURING THE SPECIFIED MAINTENANCE PERIOD. CALL FOR UTILITY LOCATIONS PRIOR TO ANY EXCAVATION.
- THE CONTRACTOR SHALL REPORT ANY DISCREPANCY IN PLAN VS. FIELD CONDITIONS IMMEDIATELY TO THE LANDSCAPE ARCHITECT, PRIOR TO CONTINUING WITH THAT PORTION OF WORK.
- NO PLANTING WILL BE INSTALLED UNTIL ALL GRADING AND CONSTRUCTION HAS BEEN COMPLETED IN THE IMMEDIATE AREA.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OF ANY OF THEIR TRENCHES OR EXCAVATIONS THAT SETTLE.
- ALL PLANTS TO BE SPECIMEN GRADE, WELL BRANCHED, HEALTHY, FULL, PRE-INOCULATED AND FERTILIZED. PLANTS SHALL BE FREE FROM DISEASE, PESTS, WOUNDS, AND SCARS. PLANTS SHALL BE FREE FROM NOTICEABLE GAPS, HOLES, OR DEFORMITIES. PLANTS SHALL BE FREE FROM BROKEN OR DEAD BRANCHES. TRUNKS WILL BE WRAPPED IF NECESSARY TO PREVENT SUN SCALD AND INSECT DAMAGE. THE LANDSCAPE CONTRACTOR SHALL REMOVE POOR BRANCHING OF EXISTING AND PROPOSED TREES.
- PRUNE PLANTS AS NECESSARY - PER STANDARD NURSERY PRACTICE AND TO CORRECT POOR BRANCHING OF EXISTING AND PROPOSED TREES.
- TOPSOIL SHALL BE PROVIDED AND GRADED BY THE GENERAL CONTRACTOR UP TO 6 INCHES BELOW FINISHED GRADE IN TURF AREAS AND 18 INCHES IN PLANTING AREAS.
- SEED/SOD LIMIT LINES ARE APPROXIMATE. CONTRACTOR SHALL SEED/SOD ALL AREAS WHICH ARE DISTURBED BY GRADING WITH THE SPECIFIED SEED/SOD MIXES.
- EDGING TO BE A SPADED EDGE UNLESS INDICATED OTHERWISE ON THE PLANS. SPADED EDGE TO PROVIDE V-SHAPED DEPTH AND WIDTH TO CREATE SEPARATION BETWEEN MULCH AND GRASS. A SPADED BED EDGE SHALL SEPARATE MULCH BEDS FROM TURF OR SEEDED AREAS. A SPADED EDGE IS NOT REQUIRED ALONG CURBED EDGES.
- CONTRACTOR SHALL INSTALL SHREDDED HARDWOOD MULCH AT A 3" DEPTH TO ALL TREES, SHRUB, PERENNIAL, AND GROUND COVER AREAS. TREES PLACED IN AREA COVERED BY TURF SHALL RECEIVE A 4 FT WIDE MAXIMUM TREE RING WITH 3" DEPTH SHREDDED HARDWOOD MULCH.
- INSTALLATION OF TREES WITHIN PARKWAYS SHALL BE COORDINATED IN THE FIELD WITH LOCATIONS OF UNDERGROUND UTILITIES. TREES SHALL NOT BE LOCATED CLOSER THAN 5' FROM UNDERGROUND UTILITY LINES AND NO CLOSER THAN 10' FROM UTILITY STRUCTURES. DO NOT DISTURB THE EXISTING PAVING, LIGHTING, OR LANDSCAPING THAT EXISTS ADJACENT TO THE SITE UNLESS OTHERWISE NOTED ON PLAN.
- ALL DISTURBED AREAS TO BE SODDED OR SEEDED, UNLESS OTHERWISE NOTED. SOD/SEED SHALL BE LOCAL HARDY TURF GRASS MIX UNLESS OTHERWISE NOTED.
- PLANT QUANTITIES SHOWN ARE FOR THE CONVENIENCE OF THE OWNER AND JURISDICTIONAL REVIEW AGENCIES. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL PLANT QUANTITIES AS DRAWN.
- THE CONTINUED MAINTENANCE OF ALL REQUIRED LANDSCAPING SHALL BE THE RESPONSIBILITY OF THE OWNER OF THE PROPERTY ON WHICH SAID MATERIALS ARE REQUIRED. ALL PLANT MATERIALS REQUIRED BY THIS SECTION SHALL BE MAINTAINED AS LIVING VEGETATION AND SHALL BE PROMPTLY REPLACED IF THE PLANT MATERIAL HAS DIED PRIOR TO FINAL ACCEPTANCE. PLANTING AREAS SHALL BE KEPT FREE OF TRASH, LITTER, AND WEEDS AT ALL TIMES.

**NOTES:**

- INSPECT TREE FOR DAMAGED BRANCHES, APPLY CORRECTIVE PRUNING.
- SET ROOT BALL ON UNEXCAVATED OR TAMPED SOIL. TOP OF ROOTBALL SHALL BE TWO INCHES ABOVE SURROUNDING GRADE WITH BURLAP AND WIRE BASKET INTACT.
- REMOVE WIRE BASKET AND BURLAP DOWN 1/2 OF ROOT BALL. REMOVE ANY TWINE, SYNTHETIC MATERIAL, WIRES, STRAPS, BURLAP, ETC. THAT COULD GIRDLE THE TREE OR RESTRICT TREE GROWTH. REMOVE OR CORRECT GIRDLING ROOTS.
- TAMP EXCAVATED SOIL AROUND BASE OF ROOTBALL.
- BACKFILL REMAINDER EXCAVATED SOIL TAMPED LIGHTLY.
- WATER THOROUGHLY WITHIN TWO HOURS USING 10 TO 15 GALLONS OF WATER.
- APPLY MULCH IN EVEN LAYER, KEEPING 6" AWAY FROM ROOT FLARE.
- FINAL LOCATION OF TREE TO BE APPROVED BY OWNER.
- PERFORM PERCOLATION TEST PER PLANTING SPECIFICATIONS. IF SUBSURFACE DRAINAGE PROBLEMS ARE ENCOUNTERED, NOTIFY PROJECT LANDSCAPE ARCHITECT.

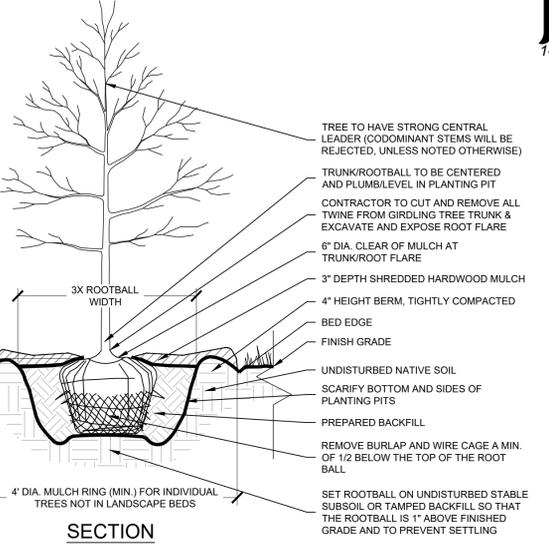


**SECTION**

**1 TYPICAL TREE PLANTING**

**NOTES:**


- EXCAVATE PLANTING BED.
- BED HEIGHT IS TO BE 2" ABOVE FINISH GRADE AND WELL DRAINED.
- REMOVE CONTAINER. SCORE SOIL MASS TO REDIRECT AND PREVENT CIRCLING ROOTS. CORRECT GIRDLING ROOTS.
- PLANT MATERIAL SHALL BE LAID OUT BY FOLLOWING THE BED EDGE, WORKING TOWARDS THE CENTER OF THE BED USING TRIANGULAR (TAGGERED) SPACING AS PLausible.
- PLUMB AND BACKFILL WITH PLANTING MIX AS SPECIFIED IN LANDSCAPE NOTES.
- APPLY MULCH IN EVEN LAYER, KEEPING AWAY FROM ROOT FLARE. MULCH LIMITS FOR PERENNIALS/GROUND COVER EXTEND TO ALL LIMITS OF PLANTING BED, SEE PLANS FOR BED LAYOUTS.
- SPACING TO BE AS SPECIFIED IN THE PLANT LIST OR AS SHOWN ON DRAWINGS. PERENNIALS SHALL BE PLACED WITH THEIR CENTER 24" FROM EDGE OF BED.

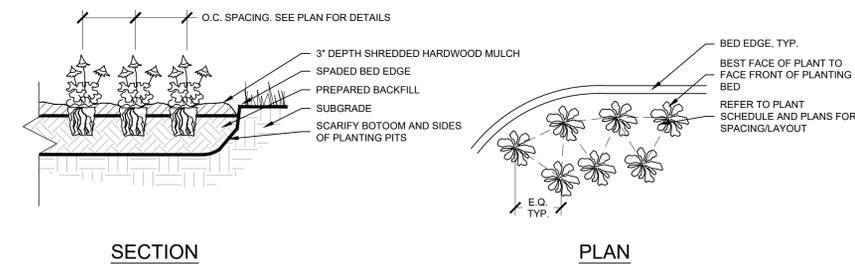

**SECTION**

**PLAN**


**2 PERENNIAL PLANTING**

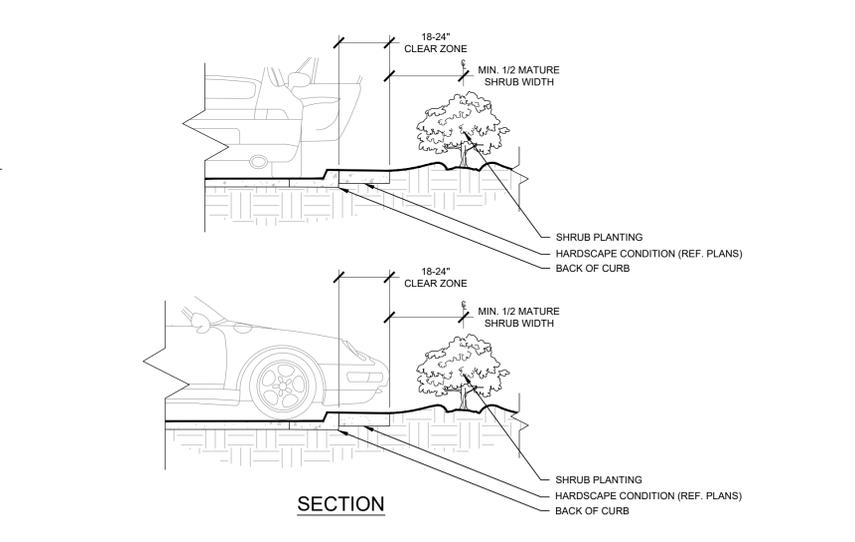

**SECTION**


**3 SHRUB PLANTING AT CURB**

**4 6' PRIVACY SCREEN FENCE**

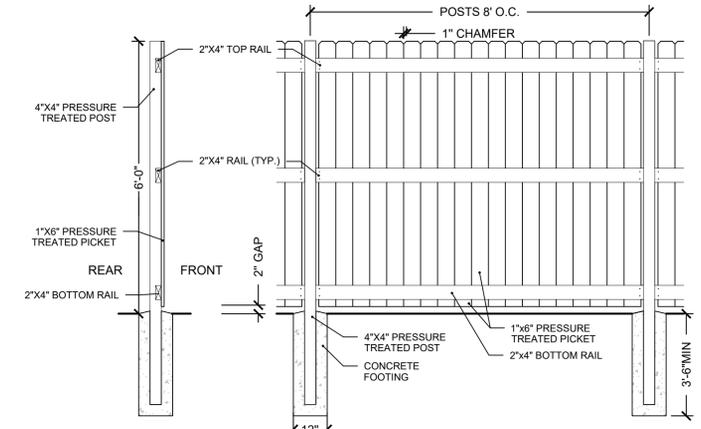

**SECTION**


**5 SHRUB PLANTING AT SIDEWALK**

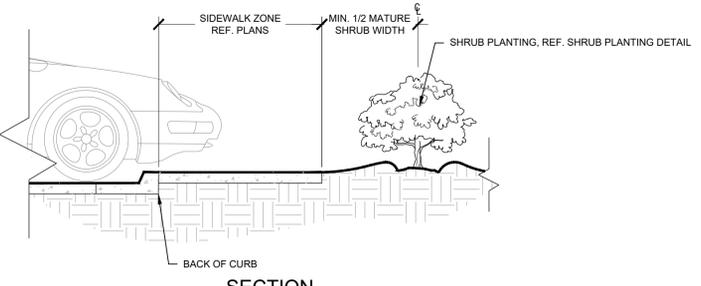

**SECTION**

**NOTES:**

- APPLY CORRECTIVE PRUNING.
- SET ROOT BALL OR CONTAINER ON UNEXCAVATED OR TAMPED SOIL. TOP OF ROOTBALL (CONTAINER) SHALL BE ONE INCH ABOVE SURROUNDING GRADE. FOR LARGER SHRUBS WITHIN PLANTING BED DIG A DEEPER PIT ONLY FOR THOSE SHRUBS.
- REMOVE BURLAP FROM TOP HALF THE LENGTH OF ROOTBALL. TWINE AND (IF USED) SYNTHETIC MATERIAL SHALL BE REMOVED FROM PLANTING BED. FOR CONTAINER GROWN SHRUBS, REMOVE CONTAINER AND LOOSEN ROOTS PRIOR TO INSTALLATION.
- REMOVE OR CORRECT GIRDLING ROOTS.
- PLUMB AND BACKFILL WITH AMENDED SOIL PER LANDSCAPE NOTES. WATER THOROUGHLY WITHIN TWO HOURS.
- APPLY MULCH IN EVEN LAYER, KEEPING AWAY FROM ROOT FLARE. MULCH LIMITS FOR SHRUBS EXTEND TO ALL LIMITS OF PLANTING BED, SEE PLANS FOR BED LAYOUTS.

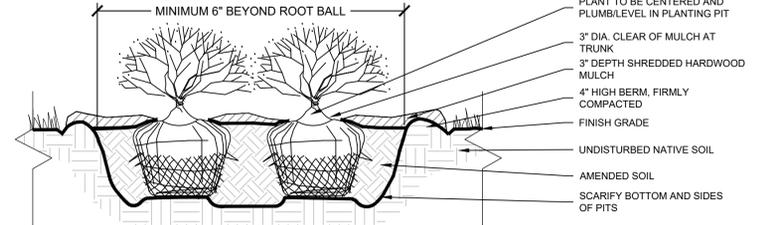

**SECTION**

**6 SHRUB PLANTING**



DATE	BY	REVISIONS
03/05/24	JPM	CITY COMMENTS
01/29/24	JPM	CITY COMMENTS
12/15/23	BH	INITIAL CITY SUBMITTAL

**Kimley»Horn**  
 © 2024 KIMLEY-HORN AND ASSOCIATES, INC.  
 111 WEST JACKSON BLVD., SUITE 1300  
 PHOENIX, AZ 85003-4445  
 WWW.KIMLEY-HORN.COM

SCALE:	AS NOTED
DESIGNED BY:	BMH
DRAWN BY:	CAE
CHECKED BY:	JPM

**MRV**  
 ARCHITECTS, INC.

**LANDSCAPE NOTES & DETAILS**

**TACO BELL**  
 1019 E. OGDEN AVE.  
 NAPERVILLE, IL

ORIGINAL ISSUE:  
 12/15/2023  
 KHA PROJECT NO.  
 268581000

SHEET NUMBER  
**L2.0**

Drawing name: \\Kimley-Horn\WML\CH\LD\DEV\268581000\_MRV\_Tacobell\_Naperville\_IL\_V2 Design\CAD\PlanSheets\L2.0 - LANDSCAPE PLAN.dwg L2.0 Mar 07, 2024 5:02pm by: jee.cogswell  
 This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc.