




Drawing name: N:\06\168018017\p168018017.dwg - L20 LANDSCAPE NOTES AND DETAILS - Jan 20, 2023 11:26am by: ChrisHaberl  
 This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Plans, specifications, and other information shall be without liability to change without notice and without notice to the contractor.

PLANT SCHEDULE				PERENNIALS AND GRASSES								
TREES	CODE	QTY	BOTANICAL / COMMON NAME	CONT	CAL	OTHER	CODE	QTY	BOTANICAL / COMMON NAME	CONT	SPACING	SIZE
	AN	3	ACER X FREEMANI 'AUTUMN BLAZE' / AUTUMN BLAZE MAPLE	B & B	2.5' CAL. MIN		AB	71	AMSONIA TABERNAEMONTANA 'BLUE ICE' / BLUE ICE STAR FLOWER	1 GAL	18" OC	
	GB	5	GINKGO BILOBA / MAIDEN-HAIR TREE	B & B	2.5' CAL. MIN		AD	47	ASTILBE JAPONICA 'DEUTSCHLAND' / DEUTSCHLAND JAPANESE ASTILBE	1 GAL	24" OC	
	QA	4	QUERCUS ALBA / WHITE OAK	B & B	2.5' CAL. MIN		AS2	43	ALLIUM X 'SUMMER BEAUTY' / SUMMER BEAUTY ALLIUM	1 GAL	18" OC	
	TS	8	TILIA TOMENTOSA 'STERLING' / STERLING SILVER LINDEN	B & B	2.5' CAL. MIN		CM	76	COREOPSIS VERTICILLATA 'MOONBEAM' / MOONBEAM THREAD LEAF COREOPSIS	1 GAL	24" OC	
	UA	9	ULMUS X 'ACCOLADE' / ACCOLADE ELM	B & B	2.5' CAL. MIN		EP	16	ECHINACEA X 'PIXIE MEADOWWRITE' / PIXIE MEADOWWRITE PURPLE CONEFLOWER	1 GAL	18" OC	
	ZS	9	ZELKOVA SERRATA / JAPANESE ZELKOVA	B & B	2.5' CAL. MIN		HB	51	HEUCHERA X 'BLACKBERRY ICE' TM / DOLCE BLACKBERRY ICE HEUCHERA	1 GAL	18" OC	
ORNAMENTAL TREES	CODE	QTY	BOTANICAL / COMMON NAME	CONT	CAL	OTHER						
	AA	3	AMELANCHIER CANADENSIS 'AUTUMN BRILLIANCE' / AUTUMN BRILLIANCE SERVICEBERRY	B & B	2' CAL. MIN		HP	24	HEUCHERA MICRANTHA 'PALACE PURPLE' / PALACE PURPLE CREVICE ALUMROOT	1 GAL	18" OC	
	MS	1	MALUS X 'SUTYZAM' TM / SUGAR TYME CRABAPPLE	B & B	4FT HT MIN	SINGLE STEM	HR	69	HEMEROCALLIS X 'ROSY RETURNS' / DAYLILY	1 GAL	24" OC	
	VP	4	VIBURNUM PRUNIFOLIUM 'MCKROUGE' / FOREST ROUGE BLACKHAW VIBURNUM	B & B	4FT HT MIN		PR	37	PULMONARIA X 'RASPBERRY SPLASH' / RASPBERRY SPLASH LUNGWORT	1 GAL	18" OC	
SHRUBS	CODE	QTY	BOTANICAL / COMMON NAME	CONT	SPACING	SIZE						
	AM	48	ARONIA MELANOCARPA 'MORTON' TM / IROQUIS BEAUTY BLACK CHOKEBERRY	-	SEE PLAN	24" HT MIN	SH2	50	SPOROBOLUS HETEROLEPIS / PRAIRIE DROPS EED	1 GAL	36" OC	
	AR	57	ARONIA MELANOCARPA 'UCCONNAM165' TM / LOW SCAPE MOUND BLACK CHOKEBERRY	-	SEE PLAN	18" HT MIN						
	CA	12	CEANOTHUS AMERICANUS / NEW JERSEY TEA	-	SEE PLAN	24" HT MIN						
	CH	28	CORNUS ALBA 'BAILHALO' TM / IVORY HALO DOGWOOD	-	SEE PLAN	24" HT MIN						
	CS	8	CORNUS SANGUINEA 'CATO' TM / ARCTIC SUN BLOODWIG DOGWOOD	-	SEE PLAN	24" HT MIN						
	FG	26	FOTHERGILLA GARDENI / DWARF FOTHERGILLA	-	SEE PLAN	18" HT MIN						
	HV	18	HYDRANGEA ARBORESCENS 'NCHA3' TM / INVINCIBELLE RUBY HYDRANGEA	-	SEE PLAN	18" HT MIN						
	HY	38	HYDRANGEA PANICULATA 'LITTLE LIME' / LITTLE LIME HYDRANGEA	-	SEE PLAN	24" HT MIN						
	IL	25	ITEA VIRGINICA 'LITTLE HENRY' TM / VIRGINIA SWEETSPIRE	-	SEE PLAN	24" HT MIN						
	PD2	54	POTENTILLA FRUTICOSA 'GOLD DROP' GOLD DROP BUSH CINQUEFOIL	-	SEE PLAN	12" HT MIN						
	PL	7	POTENTILLA FRUTICOSA 'LUNDY' TM / HAPPY FACE BUSH CINQUEFOIL	-	SEE PLAN	18" HT MIN						
	RG	22	RHUS AROMATICA 'GROLOW' / GROLOW FRAGRANT SUMAC	-	SEE PLAN	12" HT MIN						
	RK	17	RHODODENDRON X 'ROSEY LIGHTS' / ROSEY LIGHTS AZALEA	-	SEE PLAN	24" HT, MIN.						
	SP	9	SYRINGA X 'PENDA' TM / BLOOMERANG PURPLE LILAC	-	SEE PLAN	24" HT MIN						
	VA	21	VIBURNUM DENTATUM 'CHRISTOM' / BLUE MUFFIN VIBURNUM	-	SEE PLAN	24" HT MIN						
	VC	8	VIBURNUM CARLESII / KOREANSPICE VIBURNUM	-	SEE PLAN	36" HT. MIN.						
	WF	6	WEIGELA X 'DARK HORSE' / DARK HORSE WEIGELA	-	SEE PLAN	24" HT MIN						
	WS	24	WEIGELA FLORIDA 'BOKRASPIW' TM / SPILLED WINE WEIGELA	-	SEE PLAN	12" HT. MIN.						
EVERGREEN SHRUBS	CODE	QTY	BOTANICAL / COMMON NAME	CONT	SPACING	SIZE						
	CP	4	CHAMAECYPARIS PISIFERA 'BOULEVARD' / DWARF BLUE CYPRESS	-	SEE PLAN	60" HT MIN						
	JC	19	JUNIPERUS CHINENSIS 'SEA GREEN' / SEA GREEN JUNIPER	-	SEE PLAN	24" SPREAD						
	JF	19	JUNIPERUS CHINENSIS 'FAIRVIEW' / FAIRVIEW JUNIPER	-	SEE PLAN	6' HT MIN						
	TC	5	THUJA OCCIDENTALIS 'CONGABE' TM / FIRE CHIEF ARBORVITAE	-	SEE PLAN	24" HT MIN						
	TV	14	TAXUS CUSPIDATA 'TVURDY' / EMERALD PEAK YEW	-	SEE PLAN	48" HT. MIN.						
GRASSES	CODE	QTY	BOTANICAL / COMMON NAME	CONT	SPACING	SIZE						
	CK	60	CALAMAGROSTIS X ACUTIFLORA 'KARL FOERSTER' / FEATHER REED GRASS	1 GAL	SEE PLAN							
	MP	39	MISCANTHUS SINENSIS 'PURPURESCENS' / PURPLE EULALIA GRASS	1 GAL	SEE PLAN							
	PB	30	PENNISETUM ALOPECUROIDES 'BURGUNDY BUNNY' / BURGUNDY BUNNY DWARF FOUNTAIN GRASS	1 GAL	SEE PLAN							
	PH	66	PANICUM VIRGATUM 'HEAVY METAL' / BLUE SWITCH GRASS	1 GAL	SEE PLAN							


SCALE: AS NOTED	DESIGNED BY: SMH	DRAWN BY: MMH	CHECKED BY: SMH
<b>LANDSCAPE NOTES AND DETAILS</b>			
<b>NAPERVILLE MOB</b> 10 MARTIN AVE NAPERVILLE, IL 60540			
ORIGINAL ISSUE 1.01/17/222			
KHA PROJECT NO. 168018017			
SHEET NUMBER <b>L2.0</b>			

# EXHIBIT G


Drawing name: \S:\L2\L2\168018017.rvt, user: jayarama\_372, Date: 2/20/2022 11:36am, by: ChrisH.Mohr  
 This document, together with the concepts and designs presented herein, is intended only for the specific project and client for which it was prepared. Plans of and to be prepared, revised, or amended without the written authorization and signature of the originator. Plans shall be without liability to change, addition, or association, Inc.

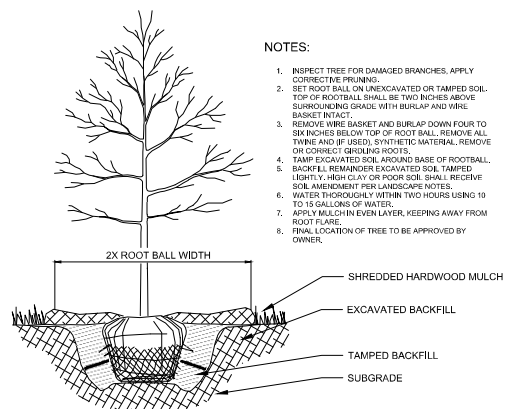

1 TREE PLANTING NTS

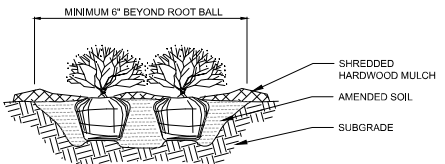

2 SHRUB PLANTING NTS

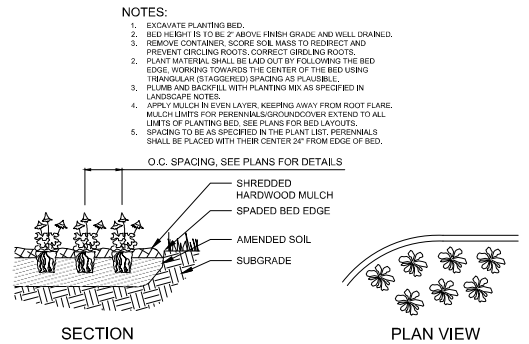

3 PERENNIAL PLANTING NTS

**LANDSCAPE NOTES**

1. THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING MATERIALS AND PLANTS SHOWN ON THE LANDSCAPE PLAN. THE CONTRACTOR IS RESPONSIBLE FOR THE COST TO REPAIR UTILITIES, ADJACENT LANDSCAPE, PUBLIC AND PRIVATE PROPERTY THAT IS DAMAGED BY THE CONTRACTOR OR THEIR SUBCONTRACTOR'S OPERATIONS DURING INSTALLATION OR DURING THE SPECIFIED MAINTENANCE PERIOD. CALL FOR UTILITY LOCATIONS PRIOR TO ANY EXCAVATION.
2. THE CONTRACTOR SHALL REPORT ANY DISCREPANCY IN PLAN VS. FIELD CONDITIONS IMMEDIATELY TO THE LANDSCAPE ARCHITECT, PRIOR TO CONTINUING WITH THAT PORTION OF WORK.
3. NO PLANTING WILL BE INSTALLED UNTIL ALL GRADING AND CONSTRUCTION HAS BEEN COMPLETED IN THE IMMEDIATE AREA.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OF ANY OF THEIR TRENCHES OR EXCAVATIONS THAT SETTLE.
5. ALL PLANTS TO BE SPECIMEN GRADE, WELL BRANCHED, HEALTHY, FULL, PRE-INOCULATED AND FERTILIZED. PLANTS SHALL BE FREE FROM DISEASE, PESTS, WOUNDS, AND SCARS. PLANTS SHALL BE FREE FROM NOTICEABLE GAPS, HOLES, OR DEFORMITIES. PLANTS SHALL BE FREE FROM BROKEN OR DEAD BRANCHES. TRUNKS WILL BE WRAPPED IF NECESSARY TO PREVENT SUN SCALD AND INSECT DAMAGE. THE LANDSCAPE CONTRACTOR SHALL REMOVE THE WRAP AT THE PROPER TIME AS PART OF THIS CONTRACT.
6. THE OWNER'S REPRESENTATIVE MAY REJECT ANY PLANT MATERIALS THAT ARE DISEASED, DEFORMED, OR OTHERWISE NOT EXHIBITING SUPERIOR QUALITY.
7. ALL NURSERY STOCK SHALL BE GUARANTEED, BY THE CONTRACTOR, FOR ONE YEAR FROM DATE OF FINAL INSPECTION. THE GUARANTEE BEGINS ON THE DATE OF THE LANDSCAPE ARCHITECT'S OR OWNER'S WRITTEN ACCEPTANCE OF THE INITIAL PLANTING. REPLACEMENT PLANT MATERIAL SHALL HAVE A ONE YEAR GUARANTEE COMMENCING UPON PLANTING.
8. PLANTS TO MEET AMERICAN STANDARD FOR NURSERY STOCK (ANSI Z60.1-2014 OR MOST CURRENT VERSION) REQUIREMENTS FOR SIZE AND TYPE SPECIFIED.
9. PRUNE PLANTS AS NECESSARY- PER STANDARD NURSERY PRACTICE AND TO CORRECT POOR BRANCHING OF EXISTING AND PROPOSED TREES.
10. TOPSOIL SHALL BE PROVIDED AND GRADED BY THE GENERAL CONTRACTOR UP TO 6 INCHES BELOW FINISHED GRADE IN TURF AREAS AND 18 INCHES IN PLANTING AREAS.
11. PLANTING AREA TOPSOIL SHALL BE AMENDED WITH 25% SPHAGNUM PEATMOSS, 5% HUMUS AND 70% PULVERIZED SOIL FOR ALL NON TURF SEED MIX AREAS, SHRUB, ORNAMENTAL GRASS, PERENNIAL AND ANNUAL BEDS.
12. SEED/SOD LIMIT LINES ARE APPROXIMATE. CONTRACTOR SHALL SEED/SOD ALL AREAS WHICH ARE DISTURBED BY GRADING WITH THE SPECIFIED SEED/SOD MIXES.
13. EDGING TO BE A SPADED EDGE UNLESS INDICATED OTHERWISE ON THE PLANS. SPADED EDGE TO PROVIDE V-SHAPED DEPTH AND WIDTH TO CREATE SEPARATION BETWEEN MULCH AND GRASS. A SPADED BED EDGE SHALL SEPARATE MULCH BEDS FROM TURF OR SEEDED AREAS. A SPADED EDGE IS NOT REQUIRED ALONG CURBED EDGES.
14. CONTRACTOR SHALL INSTALL SHREDDED HARDWOOD MULCH AT A 3\"/>



SCALE: AS NOTED	DESIGNED BY: SWM	DESIGNED DATE: 7/19/2022	MMH
DRAWN BY: MMH	REVISIONS:	REVISIONS:	REVISIONS:
CHECKED BY: SWM	DATE:	DATE:	DATE:
 401 HAWTHORNE AVENUE, SUITE 200 NAPERVILLE, ILLINOIS 60563 WWW.KIMLEY-HORN.COM			
<b>LANDSCAPE NOTES AND DETAILS</b>			
<b>NAPERVILLE MOB</b> 10 MARTIN AVE NAPERVILLE, IL 60540			
ORIGINAL ISSUE			
1.01/17/222			
KHA PROJECT NO. 168018017			
SHEET NUMBER			
L2.1			

