

**STORMWATER MANAGEMENT
PERMIT APPLICATION AND REPORT
FOR
NAPER COMMONS
DUPAGE COUNTY, ILLINOIS**

TABLE OF CONTENTS

| <u>SECTION</u> | | <u>PAGE NO.</u> |
|-----------------------|---|------------------------|
| 1.0 | PROJECT DESCRIPTION | 1 |
| 2.0 | EXISTING “WITHOUT PROJECT” CONDITIONS | 1 - 4 |
| | A. WATERSHED DESCRIPTION | |
| | B. METHODS | |
| | C. EXISTING CONDITIONS SUMMARY | |
| 3.0 | FLOODPLAIN, WETLANDS AND BUFFER ASSESSMENT | 4 - 5 |
| | A. FLOODPLAIN EVALUATION | |
| | B. BUFFER ASSESSMENT | |
| | C. WETLANDS ASSESSMENT | |
| 4.0 | PROPOSED “WITH PROJECT” CONDITIONS | 5 - 8 |
| | A. DESCRIPTION | |
| | B. HYDROLOGIC ANALYSIS | |
| | C. FLOODPLAIN ANALYSIS | |
| 5.0 | POST CONSTRUCTION BEST MANAGEMENT PRACTICES | 8 |
| 6.0 | SOIL EROSION AND SEDIMENTATION CONTROL PLAN | 8 |
| 7.0 | SUMMARY | 8 - 9 |

**STORMWATER MANAGEMENT
PERMIT APPLICATION AND REPORT
FOR
NAPER COMMONS
DUPAGE COUNTY, ILLINOIS**

EXHIBITS

TAB 1 PROJECT OVERVIEW

- A. Stormwater Management Certification
- B. Location Map
- C. FIRM Panel FM17043C0153J
- D. DuPage County Soils Map
- E. National Wetlands Inventory Map
- F. Relevant Permits

TAB 2 STORMWATER SUBMITTAL

- A. Existing Conditions Watershed Exhibit
- B. Existing Conditions Supporting Documentation
- C. "EXIST" Existing Conditions PondPack Model
- D. Proposed Conditions Watershed Exhibit
- E. Proposed Conditions Supporting Documentation
- F. "ONSITE" Proposed Conditions PondPack Model & Output
- G. "PROP" Proposed Conditions PondPack Model & Output

TAB 3 FLOODPLAIN SUBMITTAL

- A. Floodplain Fill & Cut Calculations

TAB 4 WETLAND ASSESSMENT

- A. Wetland Delineation & Assessment Report (Under Separate cover by V3 Companies of Illinois, Ltd.)

ELECTRONIC COPIES OF THE PONDPACK MODELS

**STORMWATER MANAGEMENT
PERMIT APPLICATION AND REPORT
FOR
NAPER COMMONS
DUPAGE COUNTY, ILLINOIS**

1.0 PROJECT DESCRIPTION

The Naper Commons Subdivision proposed by Pulte Home Company, LLC is a 67.6± acre, 1743 single family home and 66 townhome subdivision west of Naperville Road, North of W Lucent Lane in Naperville, DuPage County (refer to the project location map in Exhibit 1B). Site infrastructure improvements (see Engineering Plans) will include the construction of sanitary sewers, watermains, stormwater drainage and conveyance facilities, and stormwater management facilities which will be vegetatively stabilized for stormwater discharge control and best management practices.

The purpose of this Stormwater Management Analysis and Report is to summarize the hydrologic and hydraulic analyses performed for Existing and Proposed Conditions and to demonstrate that, when constructed, the development will comply with Naperville, County, State, and Federal laws and regulations and provide a significant drainage improvement and regional benefit for the watershed.

2.0 EXISTING “WITHOUT PROJECT” CONDITIONS

A. WATERSHED DESCRIPTION

The project site is part of the old Lucent Campus now owned by Nokia. A large portion of the property was previously mass graded and used as an overflow parking lot. In addition the north section is currently farmed and the remainder is open grass and trees.

There are four major hydraulic points of release on the site, all of which are tributary to Rott Creek (refer to the Existing Watershed Exhibit in Exhibit 2A). The first location of release

includes approximately 3.2 on-site acres (Subarea 001) which drain to the northwest to the DuPage County Forest Preserve. The second location of release includes approximately 14.2 on-site acres (Subareas 002) which drain to an existing wetland northeast of the site that encroaches onto the northeast corner of the property. Included with the 14.2 acres there is an additional 424.9 acres tributary to the existing wetland. The existing wetland drains to the east via a storm sewer under Naperville Road. The third location of release includes approximately 39.5 on-site acres (Subareas 003) which drain to the existing Nokia stormwater management facility (SWMF). In the existing condition, subarea 003 includes the north overflow parking lot expansion. Based on the Lucent Technologies Indian Hill Laboratory Proposed Parking Lot stormwater report which was prepared by Roake and Associates, Inc. the impervious area of the parking lot requires approximately 13.7 ac-ft of stormwater storage which is currently provided for in the existing Nokia SWMF 012. The fourth location of release includes approximately 7.7 on-site acres (Subareas 004) which drain to the existing 36" storm sewer that is Rott Creek tributary. Additionally upstream of the subarea 004 there is approximately 39.4 acres of offsite area that includes the Danada Woods Townhomes, Danada Professional Center, and Unincorporated single family development. The Danada Woods Townhomes SWMF drains through a 5.25" restrictor directly to a 36" storm sewer along Lucent Lane. The Danada Woods Townhome development was designed such that the 10 year high water level would stay within the Danada Woods development but the 100 year event would overflow and utilize existing storage on with the subject proposed development. Based on the Danada Woods Townhomes stormwater report which was prepared by Roake and Associates, Inc. 17.3 ac-ft of storage was provided on the Danada Woods property and subject property at a HWL of 736.26. Approximately 13.8 ac-ft of storage was provided on the Danada Woods development and an additional 3.5 ac-ft on the subject property. This required storage will be provided in the proposed stormwater facility adjacent to the Danada Woods basin.

B. METHODS

In accordance with the current DuPage County Countywide Stormwater & Floodplain Ordinance (Ordinance), a proposed site development which contains more than 25,000 sq-ft. of new impervious area requires stormwater management to protect downstream properties. The Ordinance requires that the proposed development attenuate flows to 0.1 cfs/ac. of development area or below existing conditions peak flows, whichever is more restrictive.

To develop rainfall vs. runoff relationships for the development, the Soil Conservation Service (SCS) method was utilized with the PondPack V8i software and employed the following methodology and procedures in determining the respective hydrologic and hydraulic parameters.

- **Runoff Curve Numbers** – The TR-55 Tables 2-2a (*urban areas*) and 2-2c (*agr. Lands*), "DuPage County Soil Survey", and watershed land use data were utilized to calculate runoff curve numbers (*CN*) for input to the Pond Pack Model. A $CN = 98$ was used for all impervious surfaces and the area encompassed by the Stormwater Management Facility (SWMF), a $CN = 82$ was used for the general farmstead, and a $CN = 74$ (type C soils) was used for all other landscaped pervious surfaces. The *CN* documentation for the project site is provided in Exhibit 2B for Existing Conditions and Exhibit 2E for Proposed Conditions.
- **Time of Concentration** - The time of concentration (T_c) was calculated using SCS TR-55 methodology. The T_c calculations were performed for flow paths representing the travel from the hydraulically most distant point of the watershed to the point of interest. The T_c documentation for the project site is provided in Exhibit 2B for Existing Conditions and Exhibit 2E for Proposed Conditions.
- **Precipitation Data/Rainfall Distribution** – Updated Bulletin 70 northeast rainfall values (March 2019 revision) with Huff rainfall distributions were selected in accordance with Appendix E criteria and the "Technical Guidance" to the Ordinance. Storage volumes were evaluated based on the 100-year frequency 24-hour duration event measuring 8.57 inches of precipitation and the Huff 3rd quartile rainfall distribution. It should be noted that the rainfall data for events lower than the 2-year intensity have not been developed, so the old rainfall data will be used for storms lower than the 2-year events.
- **Stage vs. Storage and Stage vs. Discharge Relationships** - Stage vs. storage relationships for the SWMF were measured within AutoCAD at regular intervals corresponding to the level of potential inundation, and the volume was calculated by the method of average area times the incremental interval. For off-site areas, CEMCON Ltd. surveyed the upstream reservoirs' outlet control structures and supplemented the plans with County topography to develop stage-storage and stage-discharge relationships. Stage vs. discharge relationships were developed in PondPack for all possible combinations of headwater and tailwater. PondPack was then run dynamically to evaluate the headwater

and tailwater at each time step to determine the flow through each structure. Supporting documentation is provided in Exhibit 2B for Existing Conditions and Exhibit 2E for Proposed Conditions.

C. EXISTING CONDITIONS SUMMARY

The Existing Conditions model was run for the 2-year and 100-year 1-hour events through the 24-hour events. The **2-year 2-hour event** and **100-year 1-hour event** were determined to be the critical duration event leaving the site, generating the highest peak flow. The numerical results are summarized along with the proposed results in Table 2 in Section 4.0 below. Refer to Exhibit 2C for the PondPack Model input and output for key events.

3.0 FLOODPLAIN, WETLANDS AND BUFFER ASSESSMENT

During the project-planning phase, the subject site was evaluated for the presence of regulatory floodplains/floodways, wetland habitat, and buffers. This evaluation consisted of a detailed review of available topographic, wetland, and FEMA Maps. Following is an account of the sources referenced and procedures employed in conducting the assessment for the project.

A. FLOODPLAIN EVALUATION

The project site is ultimately tributary to the Rott Creek. The FEMA FIRM Panel 17043C0153J, effective August 1, 2019, shows a large Zone AE floodplain location at Hesterman Drain 3 within the northern section of the site. However based on discussions with DuPage County, the floodplain within the site was mapped incorrectly due to an error within the modeling. The County is in the process of revising the floodplain and is in to the Illinois State Water Survey for review and approval. The discussion with the County stated that the mapped BFE of 740.4 will be revised to an elevation of 738.9 assuming the model will be approved. Refer to Exhibit 1C for copies of the old effective floodplain maps. The revised regulatory floodplain will only encroach onto the north east corner of the site with the revised 738.9 elevation. Furthermore, there is an additional Zone AE floodplain that encroaches the site along northwest corner. The Zone AE floodplain location at Hesterman Drain 4 has a BFE of 739.5. Refer to Section 4.0C for the floodplain analysis.

B. BUFFER ASSESSMENT

The County Ordinance identifies riparian buffer environments as “vegetative areas along waterways within the limits of the regulatory floodplain”. The property as stated above does not contain regulatory floodplain. See the Wetland Delineation Report prepared by V3 Companies of Illinois, Ltd.

C. WETLANDS ASSESSMENT

According to the National Wetland Inventory GIS database, there are wetlands within the development limits. Refer to Exhibit 1E for a copy of the NWI map. A Wetland Delineation Report has been prepared for the site by V3 Companies of Illinois, Ltd. Refer to Exhibit 4A for additional information.

4.0 PROPOSED “WITH PROJECT” CONDITIONS

A. DESCRIPTION

In accordance with the City of Naperville and DuPage County Stormwater Management Ordinance, any proposed site development which would affect the discharge of stormwater requires stormwater management to protect downstream properties. In general, stormwater management facilities (SWMF) are configured to restrict site runoff for the 100-year event to 0.10 cfs/acre or to less than existing conditions, whichever is more restrictive.

Naper Commons will incorporate seven (7) SWMFs (refer to Exhibit 2D for the Proposed Conditions Watershed Exhibit). Proposed SWMF 001 and 007 are located at the northeast corner of the property, and will discharge directly the existing wetland northeast of the site. Proposed SWMF 002, 003 and 004 are located upstream of the existing Nokia SWMF 012. Based on discussions with the City of Naperville, the project will utilize the previously provide storage within the existing Nokia SWMF along with the additional proposed SWMFs. Approximately 13.7 ac-ft of storage was provided within the existing Nokia SWMF 012 for the parking lot on the existing site. Proposed SWMF 005 and 006 consists of two SWMFs with an equalizer pipe directly downstream of the existing Danada Woods SWMF. The existing Danada Woods SWMF restrictor and emergency overflow will remain. Furthermore the existing Danada Woods SWMF utilized approximately 3.5 ac-ft of storage on the proposed site. An onsite only

model has been included for SWMF 005 & 006. The proposed SWMF 005 & 006 will require approximately 3.5 ac-ft of storage and an additional 5.4 ac-ft of storage is provided at overflow to accommodate the required storage onsite for the Danada Woods development. The proposed SWMF 006 will discharge via a restrictor structure to the existing 36" storm sewer tributary to Rott Creek.

The Naper Commons development will require a total of 37.7± ac-ft of storage. The seven onsite SWMFs will provide a combined 25.7± ac-ft of storage and 13.7 ac-ft of storage within the existing Nokia SWMF 012. The site will provide 39.4 ac-ft of combined storage for the proposed site.

B. HYDROLOGIC ANALYSIS

As previously stated, the site runoff for the development has been documented to be in strict conformance with the Ordinance. The proposed condition Pondpack model which accounts for the construction of the proposed stormwater management facilities on the site and the proposed land use has been prepared. This stormwater management analysis was performed to quantify stormwater storage requirements and insure that the required release rates are met in the proposed condition. The proposed release rates were calculated by adding the onsite allowable release rates (0.10 cfs/ac. for the 100yr-24hr) to establish the allowable release rate for the site. Refer to Table 1 for the allowable release rate calculations. Refer to Table 2 for a comparison between the existing and proposed total peak flows for the 2-Year and 100-Year 1Hr through 24 Hour events. See Exhibit 2G for the "PROP" PondPack Model and Output.

Table 1: Allowable Release (100-year, 24 Hour Event)

| | DURATION |
|--|--------------|
| 100 Yr | 24 Hr |
| Dev. Area Allowable Release (cfs/ac.) | 0.10 |
| Development Area (Ac.) | 62.81 |
| (A) Development Allowable Release (cfs) | 6.28 |
| (B) By-Pass Flow (Danada Woods O-13) (cfs) | 1.89 |
| (A+B) Total Allowable Release (cfs) | 8.17 |
| Prop. Release (O-1 NE + O-7 SE + O-13 SE + O-8 EX NOKIA012) (cfs) | 8.12 |

Table 2: Total Peak Discharge (cfs) Summary

| Event | 1-Hr | 2-Hr | 3-Hr | 6-Hr | 12-Hr | 18-Hr | 24-Hr |
|-------------------------------|--------|--------|--------|-------|-------|-------|-------|
| 100-Year | | | | | | | |
| Proposed Peak Discharge (cfs) | 5.78 | 6.55 | 6.87 | 7.33 | 7.80 | 8.03 | 8.12 |
| Existing Peak Discharge (cfs) | 129.44 | 128.30 | 117.85 | 88.95 | 60.84 | 49.45 | 43.30 |
| 2-Year | | | | | | | |
| Proposed Peak Discharge (cfs) | 2.15 | 2.69 | 2.94 | 3.76 | 4.30 | 4.56 | 4.69 |
| Existing Peak Discharge (cfs) | 19.26 | 20.48 | 19.68 | 17.30 | 14.59 | 13.65 | 11.63 |

As evidenced by the results, the proposed improvements significantly reduce peak flows leaving the site. The critical events in proposed conditions are now the **2-year 24-hour event** and the **100-year, 24-hour event**.

C. FLOODPLAIN ANALYSIS

The existing Hesterman Drain 4 is floodplain located onsite along the north west property line has a BFE of 739.5. The existing floodplain is within lots 135-139 these lots will require fill with in the floodplain to remove them from the floodplain. Per the Ordinance section 15.81.D.1, any placement of fill, structures, or other materials above grade in the floodplain shall require

compensatory storage equal to at least 1.5 times the volume of floodplain storage displacement. A proposed cut of 0.10 ac-ft versus a fill of 0.06 ac-ft yields a **1.7 cut to fill ratio**, satisfying the Ordinance requirements. Additionally the existing Hesterman Drain 3 floodplain located onsite along the northeast corner of the site will not include any fill within the floodplain with the proposed development. See Exhibit 3K for supporting documentation. A LOMR will be prepared and submitted to FEMA to re-map the floodplain on-site.

5.0 POST CONSTRUCTION BEST MANAGEMENT PRACTICES

In accordance with the Ordinance, this development will include Post-Construction Best Management Practices (PCBMP). The required PCBMP will be provided via naturalized wetland bottom stormwater management facilities with sediment pools.

SOIL EROSION AND SEDIMENTATION CONTROL PLAN

Soil erosion and sediment control measures will be proposed to protect downstream properties and the Special Management Areas from adverse effects of soil erosion and sedimentation. The proposed erosion and sediment control features will include:

- Storm sewer inlets protected with sediment trapping/filter control devices during.
- Silt fencing installed along the site perimeter and a double row of silt fence along wetland, buffer and floodplain areas.
- Construction entrance(s) will be implemented to minimize the impact to adjacent roadways.
- Temporary triangular silt dikes within the drainage swales.
- Disturbed areas permanently seeded and protected from soil erosion after final grading is accomplished.

7.0 SUMMARY

Pulte Home Company, LLC., proposes to develop a 67.6± acre parcel of land situated west of Naperville Road, North of W Lucent Lane in Naperville, DuPage County. The development will

consist of 173 single family homes and 66 townhome subdivision. Stormwater storage/management is required to control runoff from the site per the County Ordinance.

A hydrologic analysis was performed utilizing Pondpack to verify compliance with the County Ordinance. The stormwater management systems proposed meet and exceed the requirements of DuPage County. Additionally, as demonstrated by the PondPack model results, the proposed development will significantly reduce flows downstream and provide a net watershed benefit.

H:\402138\REPORTS\2020-10-16 REVISED Prelim SWM Report.doc

TAB 1

PROJECT OVERVIEW

EXHIBIT 1A

**STORMWATER MANAGEMENT
CERTIFICATION**



DUPAGE COUNTY STORMWATER MANAGEMENT CERTIFICATION APPLICATION (1/2)

| | | | |
|---|---------------------------------------|---|--|
| 1. Community and Status Naperville <input type="checkbox"/> Non <input checked="" type="checkbox"/> Partial <input type="checkbox"/> Complete | 2. Date of Application | 3. Stormwater Application No. (to be assigned by community) | 4. DuPage County Tracking No. |
|---|---------------------------------------|---|--|

| | |
|---|---|
| 5. Applicant: Name: <u>Ty Morris</u> Company Name: <u>Pulte Home Company, LLC</u> Address: <u>1900 E. Golf Road, Suite 300</u> City, ST, Zip: <u>Schaumburg, IL 60195</u> Phone: <u>630-201-3411</u> Email: <u>Ty.Morris@Pulte.com</u> | 6. Owner: Name: <u>Ty Morris</u> Company Name: <u>Pulte Home Company, LLC</u> Address: <u>1900 E. Golf Road, Suite 300</u> City, ST, Zip: <u>Schaumburg, IL 60195</u> Phone: <u>630-201-3411</u> Email: <u>Ty.Morris@Pulte.com</u> |
|---|---|

7. Description of Proposed Development: Development of a 67.6 Acre, 174-lot single-family and 70 mult-family subdivision in Naperville IL, DuPage County. Improvements include mass earthwork, underground utilities, and stormwater management and conveyance improvements.

| | | | | | | | | | | | | | | | | | | | |
|--|---|--------------|------------|------------|-----------|----------|-------|---------------|-------------|--------------|---------------|-------------|--------------|--|--|--------------|--|--|--------------|
| 8. Location of Development: Address: <u>W of Naperville Rd, N of W Lucent LN</u> <u>Naperville, IL</u> Municipality: <u>Naperville, DuPage County</u> Watershed Planning Area & Trib: <u>Rott Creek</u> | 9. Legal Description <table style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"><u>32</u></td> <td style="text-align: center;"><u>39N</u></td> <td style="text-align: center;"><u>10E</u></td> </tr> <tr> <td style="text-align: center;">¼ Section</td> <td style="text-align: center;">Township</td> <td style="text-align: center;">Range</td> </tr> <tr> <td style="text-align: center;">PIN <u>05</u></td> <td style="text-align: center;">- <u>32</u></td> <td style="text-align: center;">- <u>300</u></td> </tr> <tr> <td style="text-align: center;">PIN <u>08</u></td> <td style="text-align: center;">- <u>05</u></td> <td style="text-align: center;">- <u>207</u></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">- <u>012</u></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">- <u>034</u></td> </tr> </table> | <u>32</u> | <u>39N</u> | <u>10E</u> | ¼ Section | Township | Range | PIN <u>05</u> | - <u>32</u> | - <u>300</u> | PIN <u>08</u> | - <u>05</u> | - <u>207</u> | | | - <u>012</u> | | | - <u>034</u> |
| <u>32</u> | <u>39N</u> | <u>10E</u> | | | | | | | | | | | | | | | | | |
| ¼ Section | Township | Range | | | | | | | | | | | | | | | | | |
| PIN <u>05</u> | - <u>32</u> | - <u>300</u> | | | | | | | | | | | | | | | | | |
| PIN <u>08</u> | - <u>05</u> | - <u>207</u> | | | | | | | | | | | | | | | | | |
| | | - <u>012</u> | | | | | | | | | | | | | | | | | |
| | | - <u>034</u> | | | | | | | | | | | | | | | | | |

10. Check all of the conditions which apply:

Flood Plain
 Stormwater Detention
 Best Management Practices
 Soil Erosion & Sediment Control
 Wetland
 Wetland Buffer
 Riparian Buffer

11. Acknowledgement of On-Site Infiltration PCBMPs
 I acknowledge that I have used my best effort to identify zones for which on-site infiltration are prohibited for Post Construction Best Management Practices (PCBMPs) in accordance with the Ordinance (15-63.B)

Ty Morris Ty Morris. 9-14-20
 Signature of Applicant Print Name Date

12. Freedom of Information Act (FOIA)
 I acknowledge that all architects' drawings, engineers' technical submissions and other construction-related technical documents containing stormwater management information submitted with this application may be made available for inspection or copying by the County, notwithstanding 5 ILCS 140/7(1)(k), upon the written request for such materials. Such productions will be restricted to the following parties: i) the Applicant ii) any subsequent owner of the subject property; or iii) any governmental unit having planning or drainage jurisdiction within 1 and ½ mile of the subject property.

Ty Morris Ty Morris. 9-14-20
 Signature of Applicant Print Name Date
Ty Morris Ty Morris 9-14-20
 Signature of Owner Print Name Date

13. Statement of Opinion for Minimum Criteria for Stormwater Management
 I am a Professional Engineer under the employment of the Applicant. It is my professional opinion that the development meets the minimum criteria for stormwater management in accordance with the Ordinance (15-36)

Christopher R. Morgart Christopher R. Morgart, P.E. 9/14/20
 Signature of Professional Engineer Print Name Date



DUPAGE COUNTY STORMWATER MANAGEMENT CERTIFICATION APPLICATION (2/2)

| | |
|------------------------------|----------------------------------|
| Community Tracking No: _____ | DuPage County Tracking No: _____ |
|------------------------------|----------------------------------|

14. Statement of Opinion for Presence of Flood Plain, Wetlands, and Buffers (15-47-A.5)

| | | |
|---|---|---|
| <input checked="" type="checkbox"/> I acknowledge the presence of flood plain. <input type="checkbox"/> I deny the presence of flood plain. <div style="display: flex; justify-content: space-between;"> Signature of Qualified Professional Date </div> <div style="display: flex; justify-content: space-between;"> Christopher R. Morgart, P.E. 9/14/20 </div> <div style="display: flex; justify-content: space-between;"> Printed Name </div> | <input checked="" type="checkbox"/> I acknowledge the presence of wetlands. <input type="checkbox"/> I deny the presence of wetlands. <div style="display: flex; justify-content: space-between;"> Signature of Qualified Professional Date </div> <div style="display: flex; justify-content: space-between;"> Christopher R. Morgart, P.E. 9/14/20 </div> <div style="display: flex; justify-content: space-between;"> Printed Name </div> | <input checked="" type="checkbox"/> I acknowledge the presence of buffers. <input type="checkbox"/> I deny the presence of buffers. <div style="display: flex; justify-content: space-between;"> Signature of Qualified Professional Date </div> <div style="display: flex; justify-content: space-between;"> Christopher R. Morgart, P.E. 9/14/20 </div> <div style="display: flex; justify-content: space-between;"> Printed Name </div> |
|---|---|---|

15. Soil Erosion & Sediment Control Submittal Requirements (15-50.B)
 (For developments with less than 1 acre of land disturbance that are not part of a larger common plan)

I certify that the development meets the soil erosion and sediment control design criteria found in Article VII have been met.

n/a

Signature of Qualified Designer _____

Print Name _____

Date _____

16. Soil Erosion & Sediment Control Requirements (15-59.W) (For developments with land disturbing activities greater than 1 acre)

I acknowledge that the site complies with the IEPA NPDES ILR10 Permit.

Signature of Applicant _____

Ty Morris
 Print Name _____

9-14-20
 Date _____

17. Acknowledgement of Required As-Built Plans (15-47.B)

I acknowledge that a record drawing signed by either a Professional Engineer or a Professional Land Surveyor depicting the as-constructed size, rim, and invert elevations of pipes, stormwater structures and culverts, and contours and flood storage volumes of all required basins of the major stormwater systems and minor stormwater systems shall be submitted for review and approval upon completion of the stormwater facilities.

Signature of Owner _____

Ty Morris
 Print Name _____

9-14-20
 Date _____

18. Intentional Misrepresentation Under Penalty of Perjury

I declare that I have examined and/or made this application and rider, and it is true and correct to the best of my knowledge and belief. I realize that the information that I have affirmed hereon forms a basis for the issuance of the stormwater management certification(s) herein applied for and approval of plans in connection therewith shall not be construed to permit any construction upon said premises or use thereof in violation of any provision of any applicable ordinance or to excuse the owner or his successors in title from complying therewith. The Owner and Applicant each understand and agree to construct said improvement in compliance with all provisions of the applicable ordinances.

Signature of Applicant _____

Ty Morris
 Print Name _____

9-14-20
 Date _____

Signature of Owner _____

Ty Morris
 Print Name _____

9-14-20
 Date _____

DO NOT WRITE BELOW THIS LINE

| | | |
|---|--|---|
| 19. Security (15-54) Stormwater Facilities \$ _____ Wetlands/Natural Area \$ _____ SE/SC \$ _____ Total \$ _____ | 20. Stormwater Fees Community Review \$ _____ DCSM Review \$ _____ Fee-in-Lieu \$ _____ Wetland BMP | Seal/Stamp Certifications expire December 31 st of the third year of Certification or Authorization, whichever is earlier. |
|---|--|---|

21. Final Approvals (See Certification letter for special conditions and general conditions.)

| | | |
|-------------------------|------------|-------------------------|
| Community Certification | Date _____ | Approved by/title _____ |
| County Authorization | Date _____ | Approved by/title _____ |


EXHIBIT 1B

LOCATION MAP

Naper Commons

T39N, R10E, SEC. 32

WHEATON QUADRANGLE

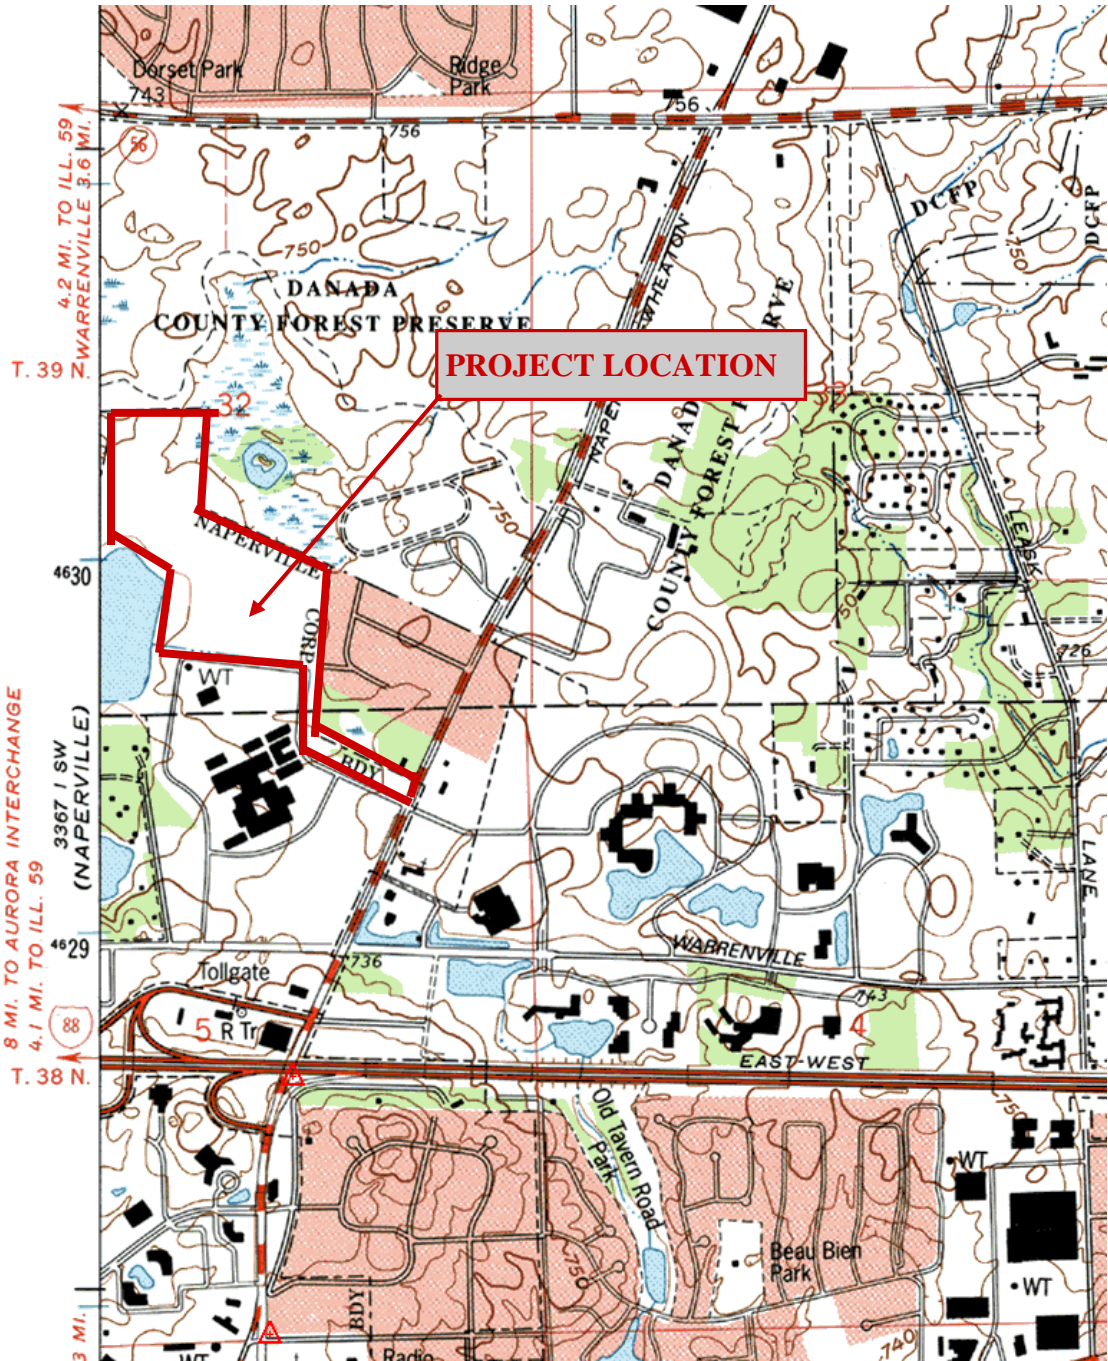

CEMCON, Ltd.

PROJECT / CLIENT:

Pulte Home Company, LLC
 1900 E. Golf Road, Suite 300
 Schaumburg, IL 60173
 847-230-5400

DRAWN BY:

ARF

9/13/20

CHECKED BY:

APPROVED:

SCALE: N.T.S.

EXHIBIT 1C

FIRM PANEL FM17043C0153J

EXHIBIT 1D

DUPAGE COUNTY SOILS MAP




United States
Department of
Agriculture

NRCS

Natural
Resources
Conservation
Service

A product of the National
Cooperative Soil Survey,
a joint effort of the United
States Department of
Agriculture and other
Federal agencies, State
agencies including the
Agricultural Experiment
Stations, and local
participants

Custom Soil Resource Report for DuPage County, Illinois

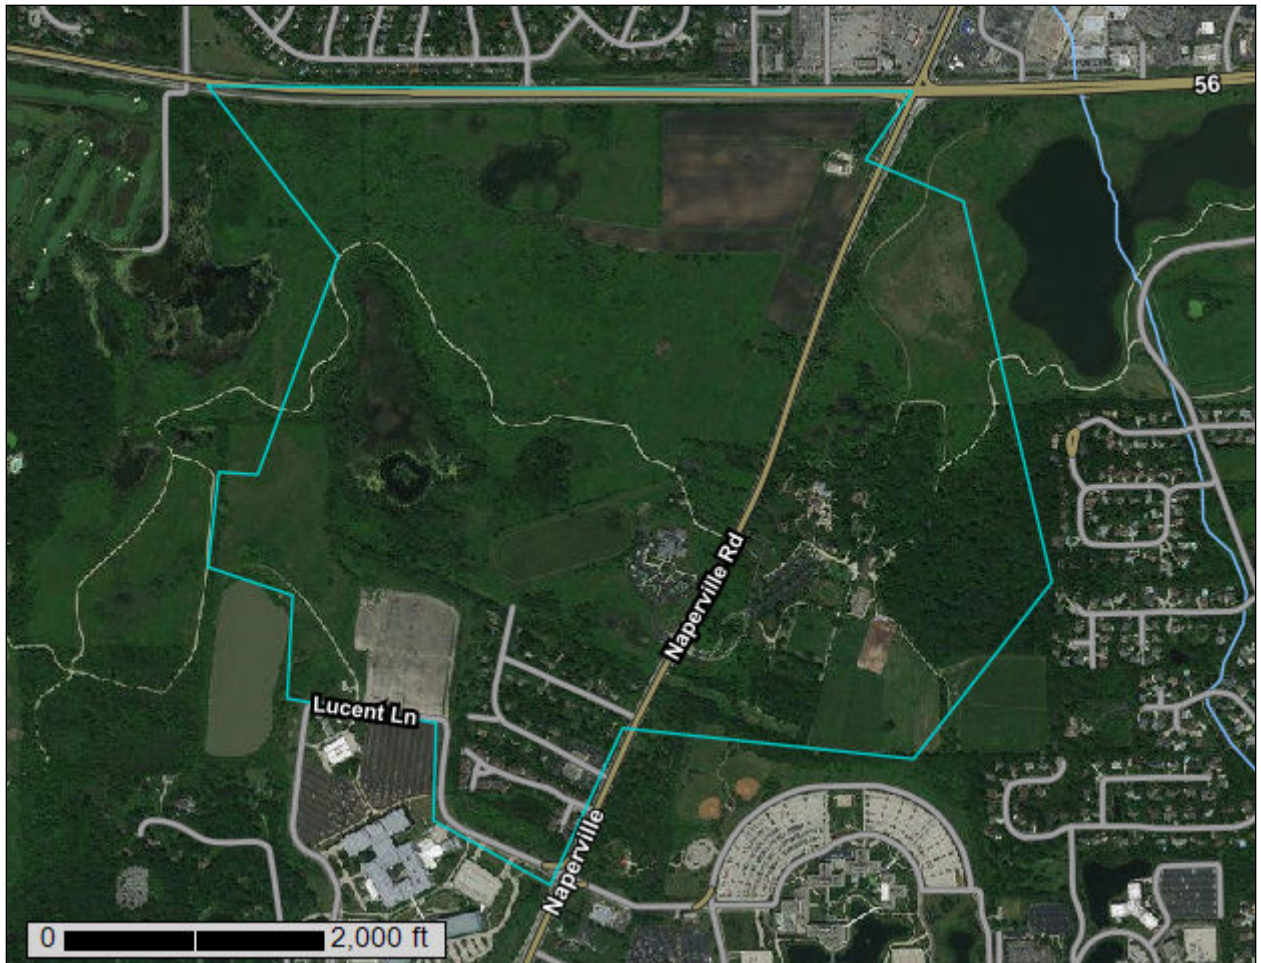

Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

| | |
|--|----|
| Preface | 2 |
| How Soil Surveys Are Made | 5 |
| Soil Map | 8 |
| Soil Map..... | 9 |
| Legend..... | 10 |
| Map Unit Legend..... | 11 |
| Map Unit Descriptions..... | 12 |
| DuPage County, Illinois..... | 14 |
| 69A—Milford silty clay loam, 0 to 2 percent slopes..... | 14 |
| 146A—Elliott silt loam, 0 to 2 percent slopes..... | 15 |
| 189A—Martinton silt loam, 0 to 2 percent slopes..... | 17 |
| 192A—Del Rey silt loam, 0 to 2 percent slopes..... | 18 |
| 223C2—Varna silt loam, 4 to 6 percent slopes, eroded..... | 20 |
| 232A—Ashkum silty clay loam, 0 to 2 percent slopes..... | 21 |
| 298A—Beecher silt loam, 0 to 2 percent slopes..... | 23 |
| 298B—Beecher silt loam, 2 to 4 percent slopes..... | 25 |
| 330A—Peotone silty clay loam, 0 to 2 percent slopes..... | 26 |
| 443B—Barrington silt loam, 2 to 4 percent slopes..... | 27 |
| 530B—Ozaukee silt loam, 2 to 4 percent slopes..... | 29 |
| 530C2—Ozaukee silt loam, 4 to 6 percent slopes, eroded..... | 31 |
| 530D2—Ozaukee silt loam, 6 to 12 percent slopes, eroded..... | 32 |
| 531B—Markham silt loam, 2 to 4 percent slopes..... | 34 |
| 531C2—Markham silt loam, 4 to 6 percent slopes, eroded..... | 35 |
| 614A—Chenoa silty clay loam, 0 to 2 percent slopes..... | 37 |
| 698B—Grays silt loam, 2 to 4 percent slopes..... | 38 |
| 805B—Orthents, clayey, undulating..... | 40 |
| 830—Landfills..... | 42 |
| 1903A—Muskego and Houghton mucks, undrained, 0 to 2 percent slopes..... | 42 |
| W—Water..... | 44 |
| References | 45 |

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)


Soils


 Soil Map Unit Polygons


 Soil Map Unit Lines


 Soil Map Unit Points

Special Point Features

 Blowout

 Borrow Pit


 Clay Spot


 Closed Depression

 Gravel Pit

 Gravelly Spot


 Landfill

 Lava Flow

 Marsh or swamp

 Mine or Quarry

 Miscellaneous Water


 Perennial Water

 Rock Outcrop


 Saline Spot

 Sandy Spot

 Severely Eroded Spot


 Sinkhole


 Slide or Slip


 Sodic Spot


 Spoil Area

 Stony Spot


 Very Stony Spot

 Wet Spot

 Other

 Special Line Features

Water Features

 Streams and Canals


Transportation

 Rails

 Interstate Highways

 US Routes

 Major Roads

 Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:12,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: DuPage County, Illinois
 Survey Area Data: Version 16, May 29, 2020

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Feb 10, 2016—Oct 8, 2016

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

| Map Unit Symbol | Map Unit Name | Acres in AOI | Percent of AOI |
|------------------------------------|--|--------------|----------------|
| 69A | Milford silty clay loam, 0 to 2 percent slopes | 34.3 | 5.3% |
| 146A | Elliott silt loam, 0 to 2 percent slopes | 64.0 | 9.9% |
| 189A | Martinton silt loam, 0 to 2 percent slopes | 40.5 | 6.3% |
| 192A | Del Rey silt loam, 0 to 2 percent slopes | 0.0 | 0.0% |
| 223C2 | Varna silt loam, 4 to 6 percent slopes, eroded | 12.7 | 2.0% |
| 232A | Ashkum silty clay loam, 0 to 2 percent slopes | 105.0 | 16.2% |
| 298A | Beecher silt loam, 0 to 2 percent slopes | 24.7 | 3.8% |
| 298B | Beecher silt loam, 2 to 4 percent slopes | 1.6 | 0.2% |
| 330A | Peotone silty clay loam, 0 to 2 percent slopes | 39.5 | 6.1% |
| 443B | Barrington silt loam, 2 to 4 percent slopes | 7.8 | 1.2% |
| 530B | Ozaukee silt loam, 2 to 4 percent slopes | 1.0 | 0.2% |
| 530C2 | Ozaukee silt loam, 4 to 6 percent slopes, eroded | 22.5 | 3.5% |
| 530D2 | Ozaukee silt loam, 6 to 12 percent slopes, eroded | 3.1 | 0.5% |
| 531B | Markham silt loam, 2 to 4 percent slopes | 127.5 | 19.7% |
| 531C2 | Markham silt loam, 4 to 6 percent slopes, eroded | 37.8 | 5.8% |
| 614A | Chenoa silty clay loam, 0 to 2 percent slopes | 0.2 | 0.0% |
| 698B | Grays silt loam, 2 to 4 percent slopes | 35.8 | 5.5% |
| 805B | Orthents, clayey, undulating | 49.8 | 7.7% |
| 830 | Landfills | 10.3 | 1.6% |
| 1903A | Muskego and Houghton mucks, undrained, 0 to 2 percent slopes | 26.2 | 4.1% |
| W | Water | 2.2 | 0.3% |
| Totals for Area of Interest | | 646.6 | 100.0% |

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas

Custom Soil Resource Report

shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

DuPage County, Illinois

69A—Milford silty clay loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2smzk
Elevation: 510 to 930 feet
Mean annual precipitation: 34 to 40 inches
Mean annual air temperature: 46 to 54 degrees F
Frost-free period: 155 to 190 days
Farmland classification: Prime farmland if drained

Map Unit Composition

Milford, drained, and similar soils: 93 percent
Minor components: 7 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Milford, Drained

Setting

Landform: Depressions on lake plains
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf, dip
Down-slope shape: Linear, concave
Across-slope shape: Linear, concave
Parent material: Clayey lacustrine deposits

Typical profile

Ap - 0 to 9 inches: silty clay loam
A - 9 to 22 inches: silty clay
Bg - 22 to 50 inches: silty clay loam
Cg - 50 to 60 inches: stratified sandy loam to silty clay loam

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Poorly drained
Runoff class: Negligible
Capacity of the most limiting layer to transmit water (Ksat): Moderately high (0.20 to 0.60 in/hr)
Depth to water table: About 0 to 12 inches
Frequency of flooding: None
Frequency of ponding: Frequent
Calcium carbonate, maximum content: 30 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: High (about 9.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2w
Hydrologic Soil Group: C/D
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Minor Components

Peotone, drained

Percent of map unit: 5 percent

Landform: Depressions

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Dip

Down-slope shape: Concave

Across-slope shape: Concave

Ecological site: R110XY024IL - Poned Depressional Sedge Meadow

Hydric soil rating: Yes

Urban land

Percent of map unit: 1 percent

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Orthents, clayey

Percent of map unit: 1 percent

Landform: Ground moraines, lake plains

Landform position (two-dimensional): Summit

Landform position (three-dimensional): Interfluvium

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

146A—Elliott silt loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2sss0

Elevation: 570 to 930 feet

Mean annual precipitation: 33 to 42 inches

Mean annual air temperature: 46 to 54 degrees F

Frost-free period: 150 to 200 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Elliott and similar soils: 94 percent

Minor components: 6 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Elliott

Setting

Landform: Till plains, ground moraines

Landform position (two-dimensional): Footslope, summit

Landform position (three-dimensional): Interfluvium

Down-slope shape: Linear

Across-slope shape: Linear

Custom Soil Resource Report

Parent material: Thin mantle of loess or other silty material over silty clay loam till

Typical profile

Ap - 0 to 6 inches: silt loam
A - 6 to 11 inches: silty clay loam
Bt1 - 11 to 16 inches: silty clay
2Bt2 - 16 to 41 inches: silty clay loam
2Cd - 41 to 60 inches: silty clay loam

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: 29 to 45 inches to densic material
Drainage class: Somewhat poorly drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 12 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 35 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Moderate (about 6.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2s
Hydrologic Soil Group: C/D
Ecological site: R110XY007IL - Moist Glacial Drift Upland Prairie, R111DY012IN - Till Ridge Prairie
Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 4 percent
Landform: Ground moraines, till plains
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY024IL - Poned Depressional Sedge Meadow
Hydric soil rating: Yes

Orthents, clayey

Percent of map unit: 1 percent
Landform: Ground moraines, till plains
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluvium
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Urban land

Percent of map unit: 1 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluvium

Custom Soil Resource Report

Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

189A—Martinton silt loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 64sv
Elevation: 510 to 980 feet
Mean annual precipitation: 28 to 40 inches
Mean annual air temperature: 45 to 54 degrees F
Frost-free period: 140 to 180 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Martinton and similar soils: 92 percent
Minor components: 8 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Martinton

Setting

Landform: Lake plains
Landform position (two-dimensional): Summit, footslope
Landform position (three-dimensional): Rise
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Lacustrine deposits

Typical profile

H1 - 0 to 12 inches: silt loam
H2 - 12 to 39 inches: silty clay loam
H3 - 39 to 60 inches: stratified sandy loam to silty clay

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Somewhat poorly drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): Moderately high (0.20 to 0.60 in/hr)
Depth to water table: About 12 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 30 percent
Available water capacity: High (about 10.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 1
Hydrologic Soil Group: C/D

Custom Soil Resource Report

Ecological site: R110XY007IL - Moist Glacial Drift Upland Prairie
Hydric soil rating: No

Minor Components

Milford

Percent of map unit: 4 percent
Landform: Lake plains
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Urban land

Percent of map unit: 2 percent
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Orthents, clayey

Percent of map unit: 2 percent
Landform: Ground moraines, lake plains
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

192A—Del Rey silt loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 64sz
Elevation: 510 to 980 feet
Mean annual precipitation: 28 to 40 inches
Mean annual air temperature: 45 to 54 degrees F
Frost-free period: 140 to 180 days
Farmland classification: Prime farmland if drained

Map Unit Composition

Del rey and similar soils: 92 percent
Minor components: 8 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Del Rey

Setting

Landform: Lake plains
Landform position (two-dimensional): Summit, footslope
Landform position (three-dimensional): Rise

Custom Soil Resource Report

Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Lacustrine deposits

Typical profile

H1 - 0 to 4 inches: silt loam
H2 - 4 to 9 inches: silt loam
H3 - 9 to 33 inches: silty clay
H4 - 33 to 41 inches: silty clay loam
H5 - 41 to 60 inches: silty clay loam

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Somewhat poorly drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 6 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 40 percent
Available water capacity: Moderate (about 8.6 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2w
Hydrologic Soil Group: C/D
Ecological site: F110XY012IL - Moist Glacial Drift Upland Forest
Hydric soil rating: No

Minor Components

Orthents, clayey

Percent of map unit: 2 percent
Landform: Ground moraines, lake plains
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluvium
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Milford

Percent of map unit: 2 percent
Landform: Lake plains
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Montgomery

Percent of map unit: 2 percent
Landform: Swales
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf

Custom Soil Resource Report

Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Urban land

Percent of map unit: 2 percent
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

223C2—Varna silt loam, 4 to 6 percent slopes, eroded

Map Unit Setting

National map unit symbol: 2yrqw
Elevation: 520 to 950 feet
Mean annual precipitation: 34 to 42 inches
Mean annual air temperature: 46 to 54 degrees F
Frost-free period: 140 to 185 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Varna, eroded, and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Varna, Eroded

Setting

Landform: Ground moraines, end moraines
Landform position (two-dimensional): Backslope, shoulder
Landform position (three-dimensional): Side slope
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Loess over silty clay loam or clay loam till

Typical profile

Ap - 0 to 9 inches: silt loam
2Bt1 - 9 to 30 inches: silty clay loam
2Bt2 - 30 to 48 inches: silty clay loam
2Cd - 48 to 60 inches: silty clay loam

Properties and qualities

Slope: 4 to 6 percent
Depth to restrictive feature: 24 to 55 inches to densic material
Drainage class: Moderately well drained
Runoff class: High
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 24 to 42 inches
Frequency of flooding: None

Custom Soil Resource Report

Frequency of ponding: None
Calcium carbonate, maximum content: 30 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Moderate (about 7.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 3e
Hydrologic Soil Group: C
Ecological site: R110XY007IL - Moist Glacial Drift Upland Prairie, R108AY006IL -
Loess Upland Prairie
Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 6 percent
Landform: Ground moraines, end moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY024IL - Poned Depressional Sedge Meadow
Hydric soil rating: Yes

Orthents, clayey

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit, backslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

Urban land

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

232A—Ashkum silty clay loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2ssrw
Elevation: 520 to 930 feet
Mean annual precipitation: 33 to 41 inches
Mean annual air temperature: 46 to 54 degrees F
Frost-free period: 160 to 190 days

Custom Soil Resource Report

Farmland classification: Prime farmland if drained

Map Unit Composition

Ashkum, drained, and similar soils: 92 percent

Minor components: 8 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Ashkum, Drained

Setting

Landform: Ground moraines, end moraines

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Concave

Parent material: Clayey colluvium over till

Typical profile

Ap - 0 to 12 inches: silty clay loam

Bg1 - 12 to 29 inches: silty clay

2Bg2 - 29 to 54 inches: silty clay loam

2Cg - 54 to 60 inches: silty clay loam

Properties and qualities

Slope: 0 to 2 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Poorly drained

Runoff class: Negligible

Capacity of the most limiting layer to transmit water (Ksat): Moderately high (0.20 to 0.60 in/hr)

Depth to water table: About 0 to 12 inches

Frequency of flooding: None

Frequency of ponding: Frequent

Calcium carbonate, maximum content: 25 percent

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water capacity: Moderate (about 8.1 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2w

Hydrologic Soil Group: C/D

Ecological site: R110XY024IL - Poned Depressional Sedge Meadow

Hydric soil rating: Yes

Minor Components

Peotone, drained

Percent of map unit: 5 percent

Landform: Depressions on ground moraines

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Dip

Down-slope shape: Concave

Across-slope shape: Concave

Ecological site: R110XY024IL - Poned Depressional Sedge Meadow

Hydric soil rating: Yes

Orthents, clayey

Percent of map unit: 2 percent
Landform: Lake plains, ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Urban land

Percent of map unit: 1 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

298A—Beecher silt loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2ytq0
Elevation: 520 to 900 feet
Mean annual precipitation: 34 to 41 inches
Mean annual air temperature: 46 to 52 degrees F
Frost-free period: 160 to 180 days
Farmland classification: Prime farmland if drained

Map Unit Composition

Beecher and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Beecher

Setting

Landform: Ground moraines, end moraines
Landform position (two-dimensional): Footslope, summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Loess over silty clay loam or clay loam till

Typical profile

Ap - 0 to 13 inches: silt loam
2Bt1 - 13 to 21 inches: silty clay loam
2Bt2 - 21 to 37 inches: silty clay loam
2Cd - 37 to 60 inches: silty clay loam

Custom Soil Resource Report

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: 24 to 45 inches to densic material
Drainage class: Somewhat poorly drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 6 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 35 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Low (about 5.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2w
Hydrologic Soil Group: D
Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 6 percent
Landform: End moraines, ground moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Hydric soil rating: Yes

Urban land

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Orthents, clayey

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit, backslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

298B—Beecher silt loam, 2 to 4 percent slopes

Map Unit Setting

National map unit symbol: 2ytq1
Elevation: 520 to 960 feet
Mean annual precipitation: 34 to 41 inches
Mean annual air temperature: 46 to 52 degrees F
Frost-free period: 160 to 180 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Beecher and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Beecher

Setting

Landform: Ground moraines, end moraines
Landform position (two-dimensional): Footslope, backslope
Landform position (three-dimensional): Side slope, base slope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Loess over silty clay loam or clay loam till

Typical profile

Ap - 0 to 13 inches: silt loam
2Bt1 - 13 to 21 inches: silty clay loam
2Bt2 - 21 to 37 inches: silty clay loam
2Cd - 37 to 60 inches: silty clay loam

Properties and qualities

Slope: 2 to 4 percent
Depth to restrictive feature: 24 to 45 inches to densic material
Drainage class: Somewhat poorly drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 6 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 35 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Low (about 5.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2e
Hydrologic Soil Group: D
Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 6 percent
Landform: End moraines, ground moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Hydric soil rating: Yes

Urban land

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Orthents, clayey

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit, backslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

330A—Peotone silty clay loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2sn05
Elevation: 500 to 1,020 feet
Mean annual precipitation: 33 to 43 inches
Mean annual air temperature: 46 to 55 degrees F
Frost-free period: 140 to 195 days
Farmland classification: Prime farmland if drained

Map Unit Composition

Peotone, drained, and similar soils: 95 percent
Minor components: 5 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Peotone, Drained

Setting

Landform: Depressions
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Dip

Custom Soil Resource Report

Down-slope shape: Concave
Across-slope shape: Concave
Parent material: Silty and clayey colluvium

Typical profile

Ap - 0 to 7 inches: silty clay loam
Bg1 - 7 to 27 inches: silty clay loam
Bg2 - 27 to 50 inches: silty clay
Cg - 50 to 60 inches: silty clay loam

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Very poorly drained
Runoff class: Negligible
Capacity of the most limiting layer to transmit water (Ksat): Moderately high (0.20 to 0.60 in/hr)
Depth to water table: About 0 to 12 inches
Frequency of flooding: None
Frequency of ponding: Frequent
Calcium carbonate, maximum content: 20 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: High (about 9.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 3w
Hydrologic Soil Group: C/D
Ecological site: R110XY024IL - Ponded Depressional Sedge Meadow
Hydric soil rating: Yes

Minor Components

Peotone, long duration ponding

Percent of map unit: 5 percent
Landform: Depressions
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Dip
Down-slope shape: Concave
Across-slope shape: Concave
Hydric soil rating: Yes

443B—Barrington silt loam, 2 to 4 percent slopes

Map Unit Setting

National map unit symbol: 64vm
Elevation: 510 to 1,020 feet
Mean annual precipitation: 28 to 40 inches
Mean annual air temperature: 45 to 54 degrees F
Frost-free period: 140 to 180 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Barrington and similar soils: 92 percent

Minor components: 8 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Barrington

Setting

Landform: Stream terraces, lake plains, outwash plains

Landform position (two-dimensional): Backslope, summit

Landform position (three-dimensional): Interfluvium, tread

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess or other silty material and in the underlying outwash

Typical profile

H1 - 0 to 11 inches: silt loam

H2 - 11 to 32 inches: silty clay loam

H3 - 32 to 42 inches: silt loam

H4 - 42 to 60 inches: stratified fine sand to silt loam

Properties and qualities

Slope: 2 to 4 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Moderately well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high
(0.60 to 2.00 in/hr)

Depth to water table: About 24 to 42 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 30 percent

Available water capacity: High (about 10.3 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2e

Hydrologic Soil Group: C

Ecological site: R110XY007IL - Moist Glacial Drift Upland Prairie

Hydric soil rating: No

Minor Components

Drummer

Percent of map unit: 4 percent

Landform: Outwash plains, ground moraines

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Linear

Ecological site: R108AY013IL - Wet Outwash Prairie, R110XY008IL - Wet Glacial
Drift Upland Prairie

Hydric soil rating: Yes

Pella

Percent of map unit: 2 percent

Custom Soil Resource Report

Landform: Outwash plains, ground moraines, lake plains
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Orthents, loamy

Percent of map unit: 1 percent
Landform: Outwash plains, ground moraines, lake plains
Landform position (two-dimensional): Summit, backslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

Urban land

Percent of map unit: 1 percent
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

530B—Ozaukee silt loam, 2 to 4 percent slopes

Map Unit Setting

National map unit symbol: 2sn06
Elevation: 550 to 980 feet
Mean annual precipitation: 35 to 41 inches
Mean annual air temperature: 47 to 52 degrees F
Frost-free period: 140 to 185 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Ozaukee and similar soils: 94 percent
Minor components: 6 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Ozaukee

Setting

Landform: End moraines, ground moraines
Landform position (two-dimensional): Summit, shoulder
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Thin mantle of loess over silty clay loam till

Typical profile

Ap - 0 to 4 inches: silt loam
BE - 4 to 10 inches: silt loam

Custom Soil Resource Report

2Bt1 - 10 to 21 inches: silty clay
2Bt2 - 21 to 39 inches: silty clay loam
2Cd - 39 to 60 inches: silty clay loam

Properties and qualities

Slope: 2 to 4 percent
Depth to restrictive feature: 23 to 45 inches to densic material
Drainage class: Moderately well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 24 to 42 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 35 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Low (about 5.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2e
Hydrologic Soil Group: C
Ecological site: F110XY012IL - Moist Glacial Drift Upland Forest
Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 4 percent
Landform: Ground moraines, end moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY024IL - Poned Depressional Sedge Meadow
Hydric soil rating: Yes

Urban land

Percent of map unit: 1 percent
Landform: Ground moraines
Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Orthents, clayey

Percent of map unit: 1 percent
Landform: Ground moraines
Landform position (two-dimensional): Backslope, summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

530C2—Ozaukee silt loam, 4 to 6 percent slopes, eroded

Map Unit Setting

National map unit symbol: 2sn07
Elevation: 540 to 980 feet
Mean annual precipitation: 35 to 42 inches
Mean annual air temperature: 47 to 53 degrees F
Frost-free period: 140 to 185 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Ozaukee, eroded, and similar soils: 96 percent
Minor components: 4 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Ozaukee, Eroded

Setting

Landform: End moraines, ground moraines
Landform position (two-dimensional): Shoulder, backslope
Landform position (three-dimensional): Side slope
Down-slope shape: Convex
Across-slope shape: Linear
Parent material: Thin mantle of loess over silty and clayey till

Typical profile

Ap - 0 to 7 inches: silt loam
2Bt1 - 7 to 26 inches: silty clay
2Bt2 - 26 to 37 inches: silty clay loam
2Cd - 37 to 60 inches: silty clay loam

Properties and qualities

Slope: 4 to 6 percent
Depth to restrictive feature: 22 to 45 inches to densic material
Drainage class: Moderately well drained
Runoff class: High
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 24 to 42 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 35 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Low (about 5.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 3e
Hydrologic Soil Group: C
Ecological site: F110XY011IL - Dry Glacial Drift Upland Forest

Hydric soil rating: No

Minor Components

Orthents, clayey

Percent of map unit: 2 percent

Landform: Ground moraines

Landform position (two-dimensional): Summit, backslope

Landform position (three-dimensional): Interfluve

Down-slope shape: Convex

Across-slope shape: Convex

Hydric soil rating: No

Urban land

Percent of map unit: 2 percent

Landform: Ground moraines

Landform position (two-dimensional): Summit

Landform position (three-dimensional): Interfluve

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

530D2—Ozaukee silt loam, 6 to 12 percent slopes, eroded

Map Unit Setting

National map unit symbol: 2sn0j

Elevation: 520 to 1,000 feet

Mean annual precipitation: 31 to 42 inches

Mean annual air temperature: 46 to 53 degrees F

Frost-free period: 135 to 195 days

Farmland classification: Farmland of statewide importance

Map Unit Composition

Ozaukee, eroded, and similar soils: 93 percent

Minor components: 7 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Ozaukee, Eroded

Setting

Landform: End moraines, ground moraines

Landform position (two-dimensional): Shoulder, backslope

Landform position (three-dimensional): Side slope

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Loess over wisconsinan age silty and clayey till

Typical profile

Ap - 0 to 7 inches: silt loam

Bt1 - 7 to 11 inches: silty clay loam

2Bt2 - 11 to 27 inches: silty clay

Custom Soil Resource Report

2BCt - 27 to 32 inches: silty clay loam

2Cd - 32 to 60 inches: silty clay loam

Properties and qualities

Slope: 6 to 12 percent

Depth to restrictive feature: 22 to 39 inches to densic material

Drainage class: Moderately well drained

Runoff class: High

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)

Depth to water table: About 24 to 42 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 35 percent

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water capacity: Low (about 4.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: C

Ecological site: F110XY011IL - Dry Glacial Drift Upland Forest

Other vegetative classification: Trees/Timber (Woody Vegetation)

Hydric soil rating: No

Minor Components

Blount, lake michigan lobe

Percent of map unit: 3 percent

Landform: End moraines, ground moraines

Landform position (two-dimensional): Footslope, summit

Landform position (three-dimensional): Interfluve

Down-slope shape: Linear

Across-slope shape: Linear

Ecological site: F110XY012IL - Moist Glacial Drift Upland Forest

Other vegetative classification: Trees/Timber (Woody Vegetation)

Hydric soil rating: No

Urban land

Percent of map unit: 2 percent

Landform: Ground moraines

Landform position (two-dimensional): Summit

Landform position (three-dimensional): Interfluve

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Ozaukee, severely eroded

Percent of map unit: 2 percent

Landform: End moraines, ground moraines

Landform position (two-dimensional): Shoulder, backslope

Landform position (three-dimensional): Side slope

Down-slope shape: Convex

Across-slope shape: Linear

Ecological site: F110XY012IL - Moist Glacial Drift Upland Forest

Other vegetative classification: Trees/Timber (Woody Vegetation)

Hydric soil rating: No

531B—Markham silt loam, 2 to 4 percent slopes

Map Unit Setting

National map unit symbol: 2ytp
Elevation: 540 to 900 feet
Mean annual precipitation: 34 to 41 inches
Mean annual air temperature: 46 to 52 degrees F
Frost-free period: 160 to 180 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Markham and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Markham

Setting

Landform: Ground moraines, end moraines
Landform position (two-dimensional): Summit, shoulder
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Loess over silty clay loam till

Typical profile

Ap - 0 to 8 inches: silt loam
2Bt1 - 8 to 21 inches: silty clay loam
2Bt2 - 21 to 32 inches: silty clay loam
2Cd - 32 to 60 inches: silty clay loam

Properties and qualities

Slope: 2 to 4 percent
Depth to restrictive feature: 20 to 55 inches to densic material
Drainage class: Moderately well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 24 to 42 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 30 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Low (about 4.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2e
Hydrologic Soil Group: C
Ecological site: R110XY010IL - Moist Glacial Drift Upland Savanna

Custom Soil Resource Report

Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 6 percent

Landform: Ground moraines, end moraines

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Linear

Across-slope shape: Concave

Ecological site: R110XY024IL - Poned Depressional Sedge Meadow

Hydric soil rating: Yes

Orthents, clayey

Percent of map unit: 2 percent

Landform: Ground moraines

Landform position (two-dimensional): Backslope, summit

Landform position (three-dimensional): Interfluve

Down-slope shape: Convex

Across-slope shape: Convex

Hydric soil rating: No

Urban land

Percent of map unit: 2 percent

Landform: Ground moraines

Landform position (two-dimensional): Summit

Landform position (three-dimensional): Interfluve

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

531C2—Markham silt loam, 4 to 6 percent slopes, eroded

Map Unit Setting

National map unit symbol: 2ytps

Elevation: 620 to 920 feet

Mean annual precipitation: 34 to 41 inches

Mean annual air temperature: 46 to 52 degrees F

Frost-free period: 160 to 180 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Markham, eroded, and similar soils: 90 percent

Minor components: 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Markham, Eroded

Setting

Landform: Ground moraines, end moraines

Custom Soil Resource Report

Landform position (two-dimensional): Shoulder, backslope
Landform position (three-dimensional): Interfluve, side slope
Down-slope shape: Convex
Across-slope shape: Linear
Parent material: Loess over silty clay loam till

Typical profile

Ap - 0 to 8 inches: silt loam
2Bt1 - 8 to 21 inches: silty clay loam
2Bt2 - 21 to 32 inches: silty clay loam
2Cd - 32 to 60 inches: silty clay loam

Properties and qualities

Slope: 4 to 6 percent
Depth to restrictive feature: 20 to 55 inches to densic material
Drainage class: Moderately well drained
Runoff class: High
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 24 to 42 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 30 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Low (about 4.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 3e
Hydrologic Soil Group: C
Ecological site: R110XY010IL - Moist Glacial Drift Upland Savanna
Hydric soil rating: No

Minor Components

Ashkum, drained

Percent of map unit: 6 percent
Landform: Ground moraines, end moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY024IL - Poned Depressional Sedge Meadow
Hydric soil rating: Yes

Orthents, clayey

Percent of map unit: 2 percent
Landform: Ground moraines
Landform position (two-dimensional): Backslope, summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

Urban land

Percent of map unit: 2 percent
Landform: Ground moraines

Custom Soil Resource Report

Landform position (two-dimensional): Summit
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

614A—Chenoa silty clay loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2t706
Elevation: 590 to 800 feet
Mean annual precipitation: 34 to 40 inches
Mean annual air temperature: 48 to 53 degrees F
Frost-free period: 155 to 190 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Chenoa and similar soils: 94 percent
Minor components: 6 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Chenoa

Setting

Landform: Ground moraines, end moraines
Landform position (two-dimensional): Summit, footslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Loess over till

Typical profile

Ap - 0 to 12 inches: silty clay loam
Btg - 12 to 32 inches: silty clay loam
2Bt - 32 to 36 inches: silty clay loam
2C - 36 to 60 inches: silty clay loam

Properties and qualities

Slope: 0 to 2 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Somewhat poorly drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: About 12 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 40 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water capacity: Moderate (about 8.3 inches)

Custom Soil Resource Report

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2w

Hydrologic Soil Group: C/D

Ecological site: R110XY007IL - Moist Glacial Drift Upland Prairie, R108AY006IL -
Loess Upland Prairie

Hydric soil rating: No

Minor Components

Elpaso, drained

Percent of map unit: 3 percent

Landform: Ground moraines, swales

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Linear

Across-slope shape: Concave

Ecological site: R108AY007IL - Wet Loess Upland Prairie, R108AY008IL - Pondered
Loess Sedge Meadow, R110XY024IL - Pondered Depressional Sedge Meadow

Hydric soil rating: Yes

Ashkum, drained

Percent of map unit: 3 percent

Landform: Ground moraines, swales

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Linear

Across-slope shape: Concave

Ecological site: R110XY024IL - Pondered Depressional Sedge Meadow

Hydric soil rating: Yes

698B—Grays silt loam, 2 to 4 percent slopes

Map Unit Setting

National map unit symbol: 64wn

Elevation: 510 to 1,020 feet

Mean annual precipitation: 28 to 40 inches

Mean annual air temperature: 45 to 54 degrees F

Frost-free period: 140 to 180 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Grays and similar soils: 92 percent

Minor components: 8 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Grays

Setting

Landform: Outwash plains, stream terraces, lake plains

Custom Soil Resource Report

Landform position (two-dimensional): Summit, backslope

Landform position (three-dimensional): Interfluve, tread

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess or other silty material and in the underlying outwash

Typical profile

H1 - 0 to 8 inches: silt loam

H2 - 8 to 11 inches: silt loam

H3 - 11 to 34 inches: silty clay loam

H4 - 34 to 42 inches: loam

H5 - 42 to 60 inches: stratified loamy sand to silt loam

Properties and qualities

Slope: 2 to 4 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Moderately well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high
(0.60 to 2.00 in/hr)

Depth to water table: About 24 to 42 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 30 percent

Available water capacity: High (about 9.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2e

Hydrologic Soil Group: C

Ecological site: R110XY010IL - Moist Glacial Drift Upland Savanna

Hydric soil rating: No

Minor Components

Urban land

Percent of map unit: 2 percent

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Drummer

Percent of map unit: 2 percent

Landform: Outwash plains, ground moraines

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Linear

Ecological site: R108AY013IL - Wet Outwash Prairie, R110XY008IL - Wet Glacial
Drift Upland Prairie

Hydric soil rating: Yes

Pella

Percent of map unit: 2 percent

Landform: Outwash plains, ground moraines, lake plains

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Talf

Custom Soil Resource Report

Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Orthents, loamy

Percent of map unit: 2 percent
Landform: Outwash plains, ground moraines, lake plains
Landform position (two-dimensional): Summit, backslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Hydric soil rating: No

805B—Orthents, clayey, undulating

Map Unit Setting

National map unit symbol: 64wv
Elevation: 510 to 980 feet
Mean annual precipitation: 28 to 40 inches
Mean annual air temperature: 45 to 54 degrees F
Frost-free period: 140 to 190 days
Farmland classification: Not prime farmland

Map Unit Composition

Orthents, clayey, undulating, and similar soils: 91 percent
Minor components: 9 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Orthents, Clayey, Undulating

Setting

Landform: Lake plains, ground moraines
Landform position (two-dimensional): Summit, backslope
Landform position (three-dimensional): Interfluve
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Earthy fill

Typical profile

H1 - 0 to 7 inches: silty clay
H2 - 7 to 60 inches: silty clay

Properties and qualities

Slope: 1 to 6 percent
Depth to restrictive feature: 4 to 10 inches to densic material
Drainage class: Moderately well drained
Runoff class: Very high
Capacity of the most limiting layer to transmit water (Ksat): Moderately low (0.02 to 0.06 in/hr)
Depth to water table: About 24 to 42 inches

Custom Soil Resource Report

Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 25 percent
Available water capacity: Very low (about 0.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 4s
Hydrologic Soil Group: D
Hydric soil rating: No

Minor Components

Ashkum

Percent of map unit: 3 percent
Landform: Ground moraines, end moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Urban land

Percent of map unit: 3 percent
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: No

Bryce

Percent of map unit: 2 percent
Landform: Glacial lakes (relict), ground moraines
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie
Hydric soil rating: Yes

Aquents, clayey

Percent of map unit: 1 percent
Landform: Lake plains
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Linear
Hydric soil rating: Yes

830—Landfills

Map Unit Setting

National map unit symbol: 64s5
Elevation: 680 to 1,020 feet
Mean annual precipitation: 28 to 40 inches
Mean annual air temperature: 45 to 52 degrees F
Frost-free period: 140 to 180 days
Farmland classification: Not prime farmland

Map Unit Composition

Orthents, landfill: 100 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Orthents, Landfill

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 8
Hydric soil rating: Unranked

1903A—Muskego and Houghton mucks, undrained, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 64sx
Elevation: 510 to 930 feet
Mean annual precipitation: 28 to 40 inches
Mean annual air temperature: 45 to 52 degrees F
Frost-free period: 140 to 180 days
Farmland classification: Not prime farmland

Map Unit Composition

Muskego and similar soils: 50 percent
Houghton and similar soils: 45 percent
Minor components: 5 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Muskego

Setting

Landform: Ground moraines, outwash plains, depressions
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Dip
Down-slope shape: Concave

Custom Soil Resource Report

Across-slope shape: Concave

Parent material: Herbaceous organic material over coprogenic material

Typical profile

O1 - 0 to 5 inches: muck

O2 - 5 to 27 inches: muck

L3 - 27 to 60 inches: coprogenous silt loam

Properties and qualities

Slope: 0 to 2 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Very poorly drained

Runoff class: Negligible

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)

Depth to water table: About 0 to 6 inches

Frequency of flooding: None

Frequency of ponding: Frequent

Calcium carbonate, maximum content: 60 percent

Available water capacity: Very high (about 17.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 5w

Hydrologic Soil Group: C/D

Ecological site: R110XY021IL - Poned Organic Alkaline Peatland, R110XY024IL

- Poned Depressional Sedge Meadow, R110XY020IL - Poned Organic

Acidic Peatland

Hydric soil rating: Yes

Description of Houghton

Setting

Landform: Depressions, ground moraines, outwash plains

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Dip

Down-slope shape: Concave

Across-slope shape: Concave

Parent material: Herbaceous organic material

Typical profile

O1 - 0 to 19 inches: muck

O2 - 19 to 60 inches: muck

Properties and qualities

Slope: 0 to 2 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Very poorly drained

Runoff class: Negligible

Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high (0.20 to 6.00 in/hr)

Depth to water table: About 0 to 6 inches

Frequency of flooding: None

Frequency of ponding: Frequent

Available water capacity: Very high (about 23.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Custom Soil Resource Report

Land capability classification (nonirrigated): 5w

Hydrologic Soil Group: A/D

Ecological site: R110XY021IL - Ponded Organic Alkaline Peatland, R110XY024IL

- Ponded Depressional Sedge Meadow, R110XY020IL - Ponded Organic Acidic Peatland

Hydric soil rating: Yes

Minor Components

Drummer

Percent of map unit: 5 percent

Landform: Outwash plains, ground moraines

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Linear

Ecological site: R110XY008IL - Wet Glacial Drift Upland Prairie

Hydric soil rating: Yes

W—Water

Map Unit Composition

Water: 100 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Water

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8w

Hydric soil rating: Unranked

References

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

EXHIBIT 1E







NATIONAL WETLANDS INVENTORY MAP



U.S. Fish and Wildlife Service, National Standards and Support Team,
wetlands_team@fws.gov

November 9, 2018

Wetlands

- | | | |
|--|---|--|
|  Estuarine and Marine Deepwater |  Freshwater Emergent Wetland |  Lake |
|  Estuarine and Marine Wetland |  Freshwater Forested/Shrub Wetland |  Other |
| |  Freshwater Pond |  Riverine |

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

EXHIBIT 1F

RELEVANT PERMITS



Illinois Department of Natural Resources

One Natural Resources Way Springfield, Illinois 62702-1271
<http://dnr.state.il.us>

JB Pritzker, Governor

Colleen Callahan, Director

May 01, 2019

Alicia Metzger
V3 Companies
7325 Janes Ave.
Woodridge, IL 60517

RE: 1960 & 2000 Lucent Ln and Vacant Prop to NW
Project Number(s): 1910300 [19112]
County: DuPage

Dear Applicant:

This letter is in reference to the project you recently submitted for consultation. The natural resource review provided by EcoCAT identified protected resources that may be in the vicinity of the proposed action. The Department has evaluated this information and concluded that adverse effects are unlikely. Therefore, consultation under 17 Ill. Adm. Code Part 1075 is terminated.

This consultation is valid for two years unless new information becomes available that was not previously considered; the proposed action is modified; or additional species, essential habitat, or Natural Areas are identified in the vicinity. If the project has not been implemented within two years of the date of this letter, or any of the above listed conditions develop, a new consultation is necessary.

The natural resource review reflects the information existing in the Illinois Natural Heritage Database at the time of the project submittal, and should not be regarded as a final statement on the site being considered, nor should it be a substitute for detailed site surveys or field surveys required for environmental assessments. If additional protected resources are encountered during the project's implementation, you must comply with the applicable statutes and regulations. Also, note that termination does not imply IDNR's authorization or endorsement of the proposed action.

Please contact me if you have questions regarding this review.

Justin Dillard
Division of Ecosystems and Environment
217-785-5500

TAB 2

STORMWATER SUBMITTAL


EXHIBIT 2A

**EXISTING CONDITIONS
WATERSHED EXHIBIT**

EXISTING WATERSHED EXHIBIT



FOR

NAPER COMMONS

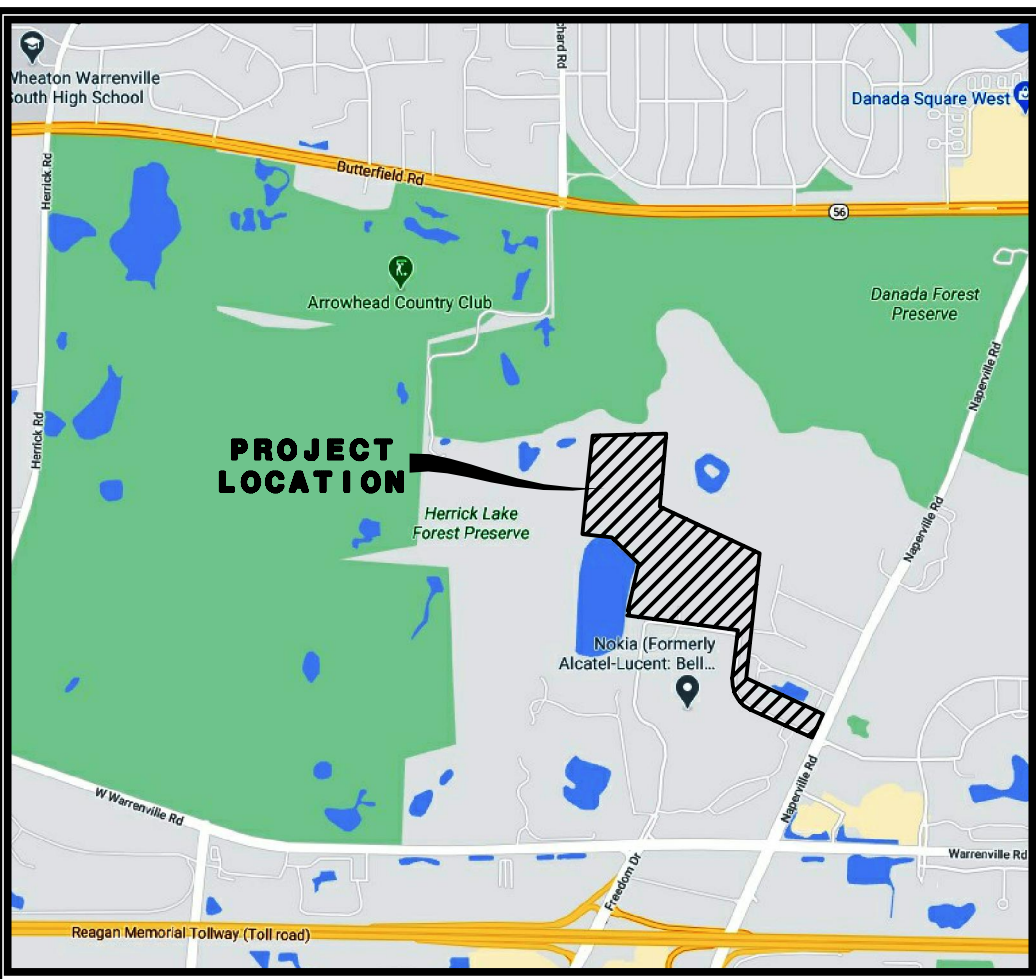

LOCATION MAP

100 50 0 100
SCALE: 1 INCH = 100 FEET

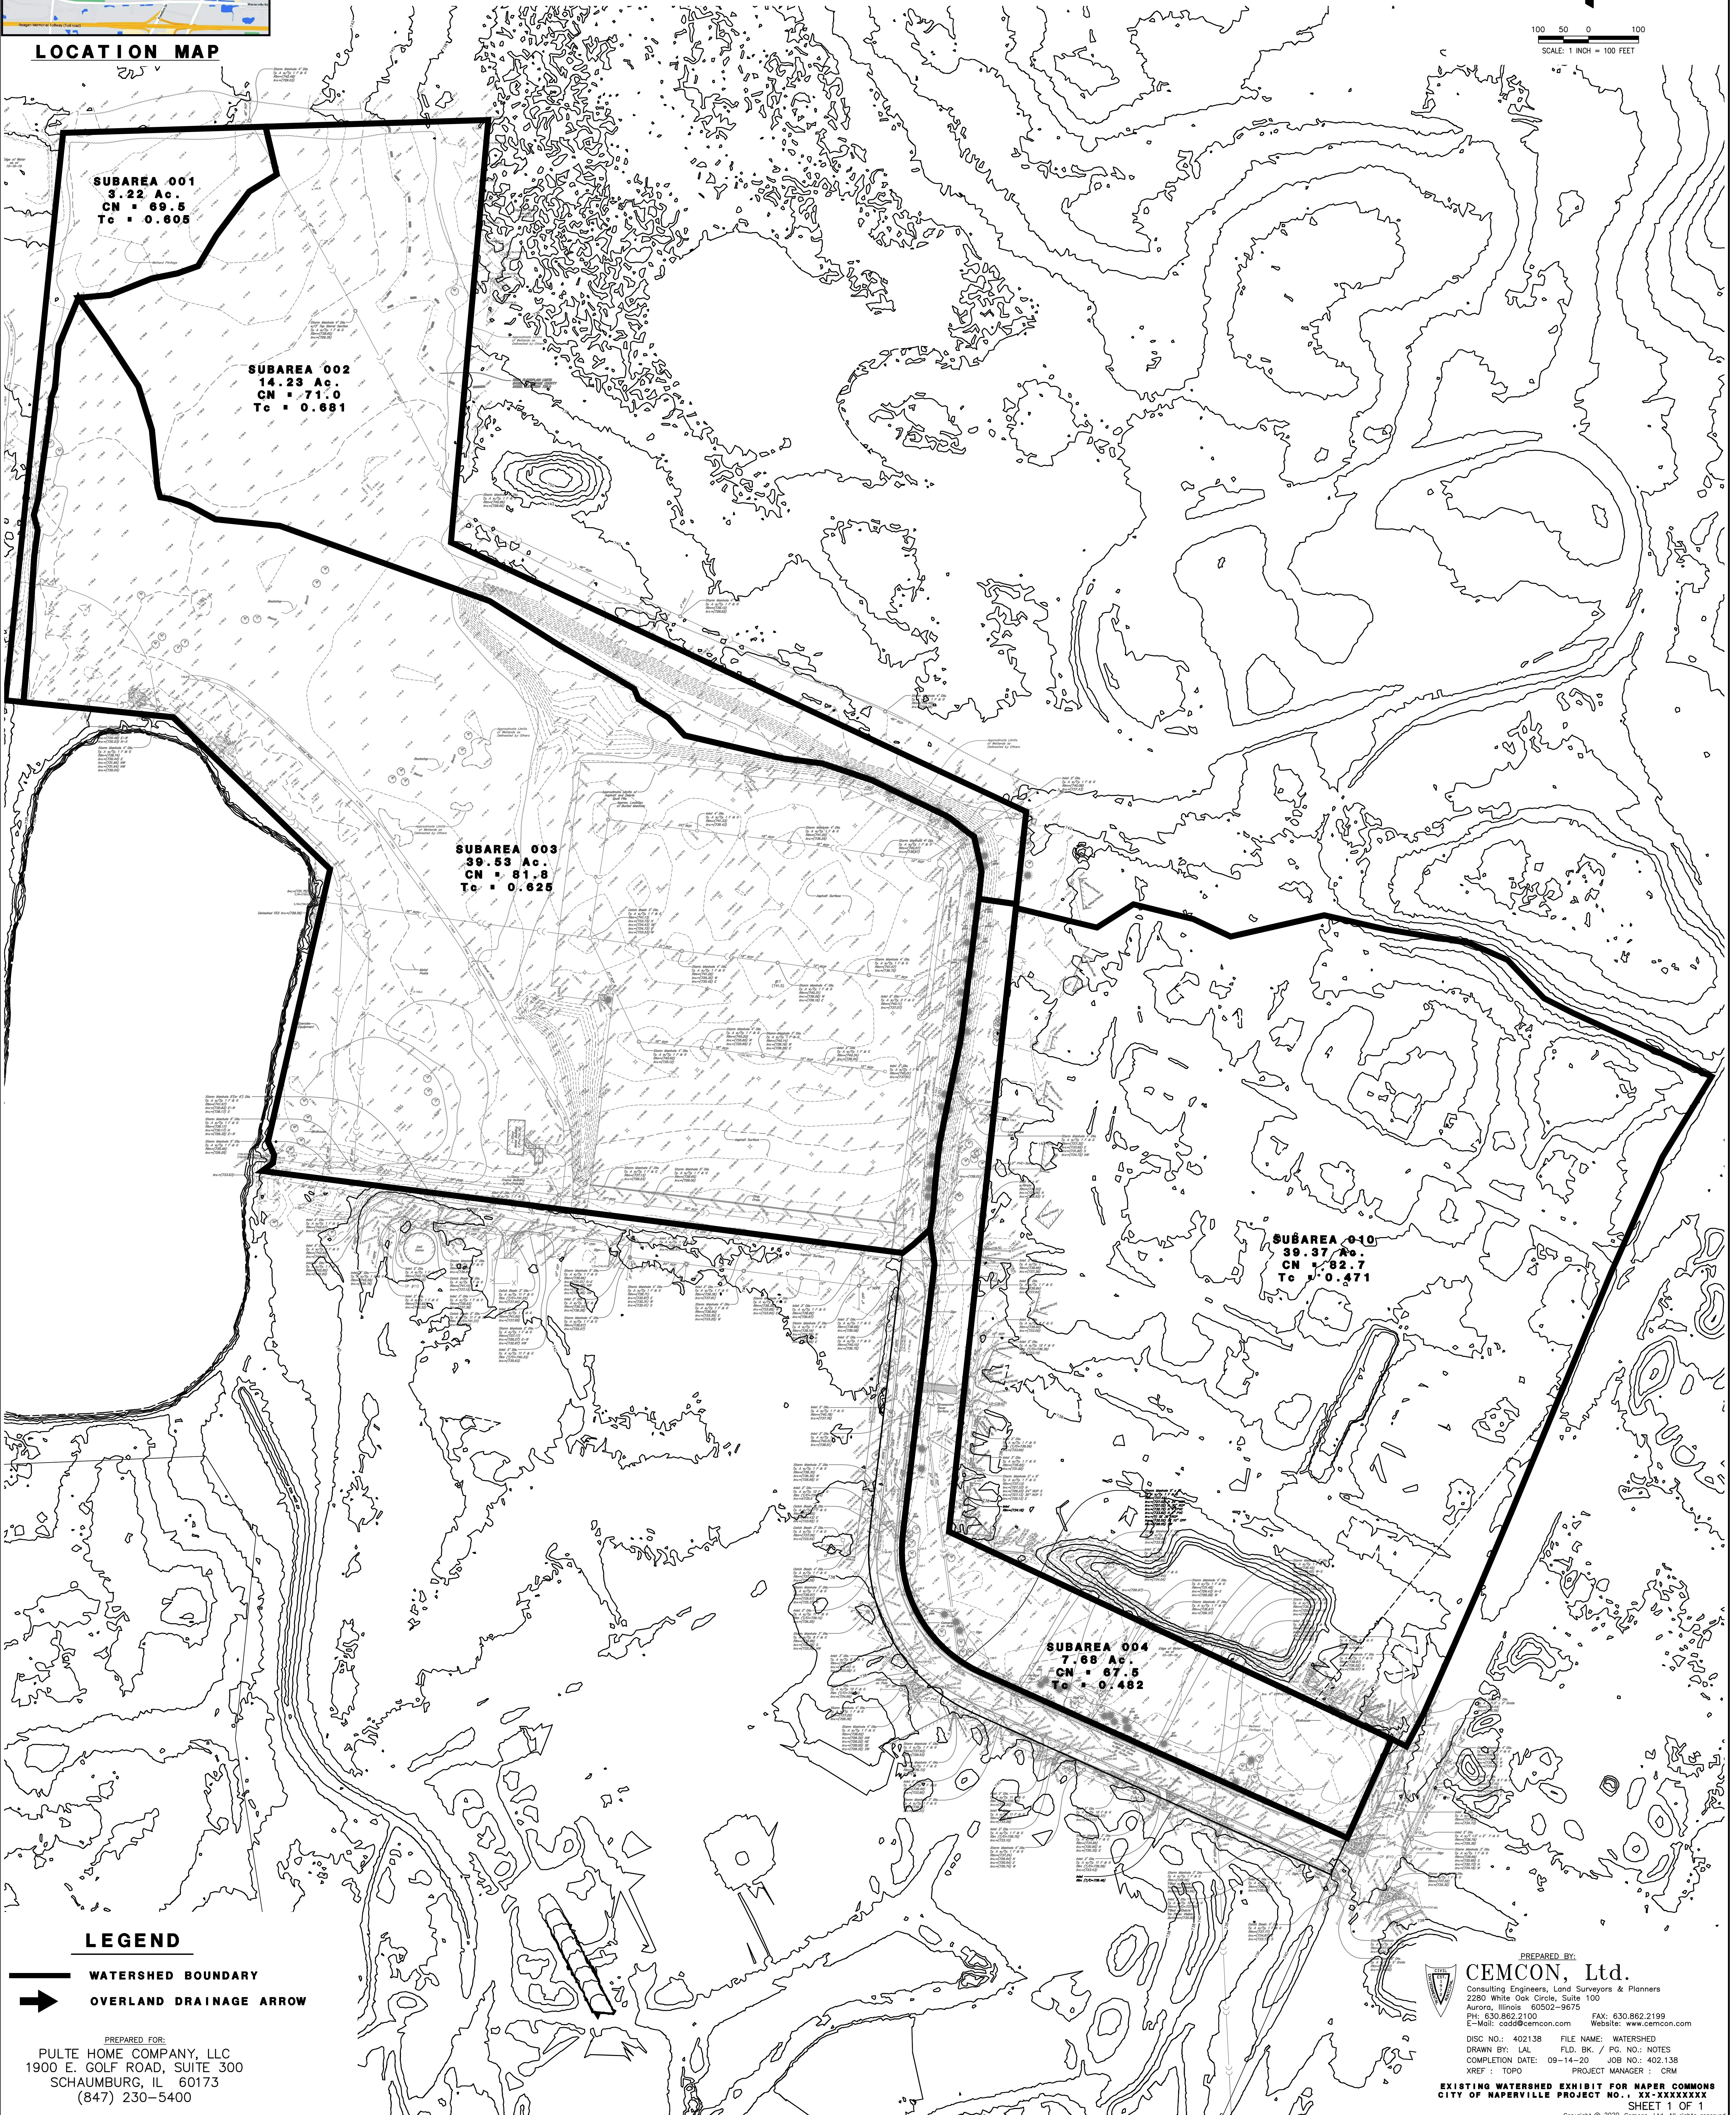

SUBAREA 001
3.22 Ac.
CN = 69.5
Tc = 0.605

SUBAREA 002
14.23 Ac.
CN = 71.0
Tc = 0.681

SUBAREA 003
39.53 Ac.
CN = 81.8
Tc = 0.625

SUBAREA 004
39.37 Ac.
CN = 82.7
Tc = 0.471

SUBAREA 005
7.68 Ac.
CN = 67.5
Tc = 0.482

LEGEND

WATERSHED BOUNDARY

OVERLAND DRAINAGE ARROW

PREPARED FOR:
PULTE HOME COMPANY, LLC
1900 E. GOLF ROAD, SUITE 300
SCHAUMBURG, IL 60173
(847) 230-5400

PREPARED BY:
CEMCON, Ltd.
Consulting Engineers, Land Surveyors & Planners
2280 White Oak Circle, Suite 100
Aurora, Illinois 60502-9875
PH: 630.862.2100 FAX: 630.862.2199
E-Mail: cadd@cemcon.com Website: www.cemcon.com

DISC NO.: 402138 FILE NAME: WATERSHED
DRAWN BY: LAL FLD. BK. / PG. NO.: NOTES
COMPLETION DATE: 09-14-20 JOB NO.: 402138
XREF: TOPO PROJECT MANAGER: CRM

EXISTING WATERSHED EXHIBIT FOR NAPER COMMONS
CITY OF NAPERVILLE PROJECT NO.: XX-XXXXXXX
SHEET 1 OF 1
Copyright © 2020 CEMCON, Ltd. All rights reserved.

EXHIBIT 2B

EXISTING CONDITIONS SUPPORTING DOCUMENTATION

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 001

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Meadow | 71 | | | 1.40 | 99.4 |
| C | Brush (good condition) | 65 | | | 0.57 | 37.05 |
| C | Woods (good condition) | 70 | | | 1.25 | 87.5 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 3.22 | 223.950 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{223.950}{3.220} = \underline{69.550}$$

Use CN = 69.5

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed

SUBAREA 002

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Meadow | 71 | | | 2.22 | 157.62 |
| C | Brush (good condition) | 65 | | | 3.95 | 256.75 |
| C | Open Space (good condition) | 74 | | | 8.06 | 596.44 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 14.23 | 1010.810 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{1010.810}{14.230} = \underline{71.034}$$

Use CN = 71.0

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed

SUBAREA 003

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Impervious Area (Paving, gravel) | 98 | | | 15.09 | 1478.82 |
| C | Brush (good condition) | 65 | | | 6.13 | 398.45 |
| C | Open Space (good condition) | 74 | | | 18.31 | 1354.94 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 39.53 | 3232.210 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{3232.210}{39.530} = 81.766$$

Use CN = 81.8

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed

SUBAREA 004

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|--|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Brush (good condition) | 65 | | | 5.51 | 358.15 |
| C | Open Space (good condition) | 74 | | | 2.17 | 160.58 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 7.68 | 518.730 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{518.730}{7.680} = \underline{67.543}$$

Use CN = 67.5

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed

SUBAREA 005

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Impervious Area (Paving, gravel) | 98 | | | 1.10 | 107.8 |
| C | Open Space (good condition) | 74 | | | 0.33 | 24.42 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 1.43 | 132.220 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{132.220}{1.430} = \underline{92.462}$$

Use CN = 92.5

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed

SUBAREA 006

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Impervious Area (Paving, gravel) | 98 | | | 0.87 | 85.26 |
| C | Open Space (good condition) | 74 | | | 0.49 | 36.26 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 1.36 | 121.520 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{121.520}{1.360} = 89.353$$

Use CN = 89.4

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 010

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area X_ acres mi2 % | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Woods - Grass Combination (good condition) | 72 | | | 2.89 | 208.08 |
| C | Brush (good condition) | 65 | | | 82.00 | 5330 |
| C | Residential District: 1/8 Ac. Lots (townhomes) | 90 | | | 8.32 | 748.8 |
| C | Residential District: 1/2 Ac. Lots (single-family) | 80 | | | 23.22 | 1857.6 |
| C | Impervious Area (paving, standing water) | 98 | | | 3.65 | 357.7 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 120.08 | 8502.180 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{8502.180}{120.080} = 70.804$$

Use CN = 70.8

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/4/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed

SUBAREA 011

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|----------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | X_ acres mi2 % | |
| C | Impervious Area (Paving, gravel) | 98 | | | 7.51 | 735.98 |
| C | Open Space (good condition) | 74 | | | 1.18 | 87.32 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 8.69 | 823.300 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{823.300}{8.690} = 94.741$$

Use CN = 94.7

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 001

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|-----------|
| | Grass | |
| | 0.24 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.002 | |
| hr | 0.585 | + = 0.585 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----------|
| | unpaved | |
| | 100 | |
| | 0.007 | |
| | 1.36 | |
| hr | 0.020 | + = 0.020 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|-----|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.605
 min 36

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 002

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|-----------|
| | Grass | |
| | 0.24 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.004 | |
| hr | 0.443 | + = 0.443 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----------|
| | unpaved | |
| | 760 | |
| | 0.003 | |
| | 0.89 | |
| hr | 0.238 | + = 0.238 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|-----|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.681
 min 41

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 003

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| | | |
|---|-------------|-----------|
| Segment ID | | |
| 1. Surface Description | Grass | |
| 2. Manning's roughness coeff., n | 0.24 | |
| 3. Flow length, L (total L ≤ 300 ft) | ft 100 | |
| 4. Two-yr 24-hr rainfall, P ₂ | in 3.34 | |
| 5. Land slope, s | ft/ft 0.004 | |
| 6. $T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$ | hr 0.443 | + = 0.443 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|----------|-----------|
| Segment ID | | |
| 7. Surface description (paved or unpaved) | unpaved | |
| 8. Flow length, L | 580 | |
| 9. Watercourse slope, s | 0.003 | |
| 10. Average velocity, V (figure 3-1) | 0.89 | |
| 11. $T_t = \frac{L}{3600 V}$ | hr 0.181 | + = 0.181 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|-----------------|-----|
| Segment ID | | |
| 12. Cross sectional flow area, a | ft ² | |
| 13. Wetted perimeter, pw | ft | |
| 14. Hydraulic radius, r= a/pw compute r | ft | |
| 15. Channel Slope, s | ft/ft | |
| 16. Manning's roughness coeff., n | | |
| 17. $V = 1.49 r^{2/3} s^{1/2} / n$ | ft/s 3 | |
| 18. Flow length, L | ft | |
| 19. $T_t = \frac{L}{3600 V}$ | hr | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.625
 min 37

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 004

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|---|
| | Grass | |
| | 0.24 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.01 | |
| hr | 0.307 | + = 0.307 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|---|
| | unpaved | |
| | 560 | |
| | 0.003 | |
| | 0.89 | |
| hr | 0.175 | + = 0.175 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|--|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.482
min 29

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 005

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s

$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|---------|---|
| | Asphalt | |
| | 0.011 | |
| ft | 75 | |
| in | 3.34 | |
| ft/ft | 0.005 | |
| hr | 0.027 | + = 0.027 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)

$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|--|
| | unpaved | |
| | 0.002 | |
| hr | 0.72 | + = |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. V= 1.49 r^{2/3} s^{1/2} / n
18. Flow length, L

$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|--------|---|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | 1020 | |
| hr | 0.0944 | + = 0.094 |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.122
min 7

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 006

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|---------|-----------|
| | Asphalt | |
| | 0.011 | |
| ft | 52 | |
| in | 3.34 | |
| ft/ft | 0.002 | |
| hr | 0.029 | + = 0.029 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----|
| | unpaved | |
| | | |
| | 0.002 | |
| | 0.72 | |
| hr | | + = |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|--------|-----------|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | 765 | |
| hr | 0.0708 | + = 0.071 |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.100
 min 6

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 010

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|-----------|
| | Grass | |
| | 0.024 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.02 | |
| hr | 0.037 | + = 0.037 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----------|
| | unpaved | |
| | 1500 | |
| | 0.005 | |
| | 1.15 | |
| hr | 0.363 | + = 0.363 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|--------|-----------|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | 765 | |
| hr | 0.0708 | + = 0.071 |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.471
 min 28

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/4/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 011

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|---------|-----------|
| | Asphalt | |
| | 0.011 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.007 | |
| hr | 0.030 | + = 0.030 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----------|
| | unpaved | |
| | 380 | |
| | 0.007 | |
| | 1.36 | |
| hr | 0.078 | + = 0.078 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|--------|-----------|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | 765 | |
| hr | 0.0708 | + = 0.071 |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.179
min 11

Job #: 402138
Project: Nokia Site

Date: September 4, 2020
Revised:
By: JMH

| STORMWATER MANAGEMENT FACILITY 010 | | | | |
|---|--------------------|-------------------|---|--|
| EXISTING DANADA WOODS TOWNHOMES | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 726.87 | 43020 | 0.988 | 0.000 | 0.000 |
| 727.0 | 43870 | 1.007 | 0.130 | 0.130 |
| 728.0 | 48150 | 1.105 | 1.056 | 1.186 |
| 729.0 | 52590 | 1.207 | 1.156 | 2.342 |
| 730.0 | 57050 | 1.310 | 1.258 | 3.601 |
| 731.0 | 63560 | 1.459 | 1.384 | 4.985 |
| 732.0 | 68900 | 1.582 | 1.520 | 6.506 |
| 733.0 | 82230 | 1.888 | 1.735 | 8.240 |
| 734.0 | 114950 | 2.639 | 2.263 | 10.504 |
| 735.0 | 172860 | 3.968 | 3.304 | 13.807 |
| 736.00 | 226320 | 5.196 | 4.582 | 18.389 |
| 736.39 | 278900 | 6.403 | 2.262 | 20.651 |
| 737.0 | 342150 | 7.855 | 4.348 | 24.999 |

DANADA WOODS TOWNHOMES

NAPERVILLE, ILLINOIS

FINAL STORM WATER MANAGEMENT PLAN DESIGN NARRATIVE

FEBRUARY 24, 1997

Prepared For:

**Century Homes
199 South Addison Rd., Suite 100
Addison, Illinois 60191-1978
Tel. (630)787-0873**

Prepared By:

**Roake and Associates, Inc.
1887 High Grove Lane
Naperville, Illinois 60540
Tel. (630) 355-3232**


Based on the 57.9 acre catchment, the peak release rate is 0.13 cfs/acre, which exceeds the ordinance mandated 0.10 cfs/ acre peak discharge. Of the 10.10 acre-feet of depressional storage below el. 736.26, approximately 4.53 acre-feet is proposed to be filled within the limits of this project, although this volume will be replaced at a ratio of 1.5:1.

Proposed Conditions

The depressional area within the subject site was reconfigured to permit the additional storage for the site development to be included without an increase in flood elevation above the existing flood elevation of 736.26. Due to the depth of the 36" storm sewer, it was possible to increase the depth of the basin to increase storage capacity. The bottom elevation has been established at el. 727.6, which is slightly (0.9') above the invert of the 36" pipe. Discharge from the depression will be regulated by a plate orifice located in the downstream manhole prior to discharge into the 36" pipe. The required storage volume, as dictated by Mr. Steffen's memo of February 14, 1997, shall be the sum of the existing storage volume of 10.10 acre-feet; the compensatory storage volume required as a result of filling of fifty percent of the fill volume of 4.53 acre-feet, or 2.27 acre-feet; and the development storage volume as determined by Mr. Steffen using an 85 percent hydraulically connected impervious factor (as recommended in the documentation for Commercial/Industrial development and not 50 percent as recommended for multi-family development) of 0.51 acre-feet per acre multiplied by the gross project area of 9.66 acres, or 4.93 acre-feet; for a total storage requirement of 17.30 acre-feet. The site was designed to accommodate a total of at least 17.30 acre-feet at a design elevation of 736.26, the estimated existing design flood stage. To achieve the desired storage volume of 17.30 acre-feet at an elevation of 736.26, a plate-type orifice with a diameter of 5.25" was utilized in the downstream manhole. It was assumed that the maximum storage volume or minimum release rate from the site occurs when the receiving 36" storm sewer is operating at maximum capacity, or a depth of flow of 0.94 times the diameter of the storm sewer. The orifice was then checked for the minimum flow condition in the 36" storm sewer. This condition was assumed to be the peak discharge from the site with no other contributing flows in the storm sewer, which created a depth of flow in the 36" pipe of 0.57 feet for 2.5 cfs. The peak discharge (36" empty) was determined to be 2.9 cfs, or 0.05 cfs per acre for the entire tributary watershed. (The County Ordinance requirement is 0.10 cfs per acre from the development site only). Due to the excessive restriction imposed at the outlet to develop the storage required by Mr. Steffen, the drain-down time is estimated to be about four days for the design event.

PROVIDED STORAGE WITHIN DANADA WOODS BASIN 13.80 ACFT
(SEE ATTACHED AS-BUILT)

17.30 - 13.80 = 3.5 ACFT REQUIRED ONSITE NAPER COMMONS

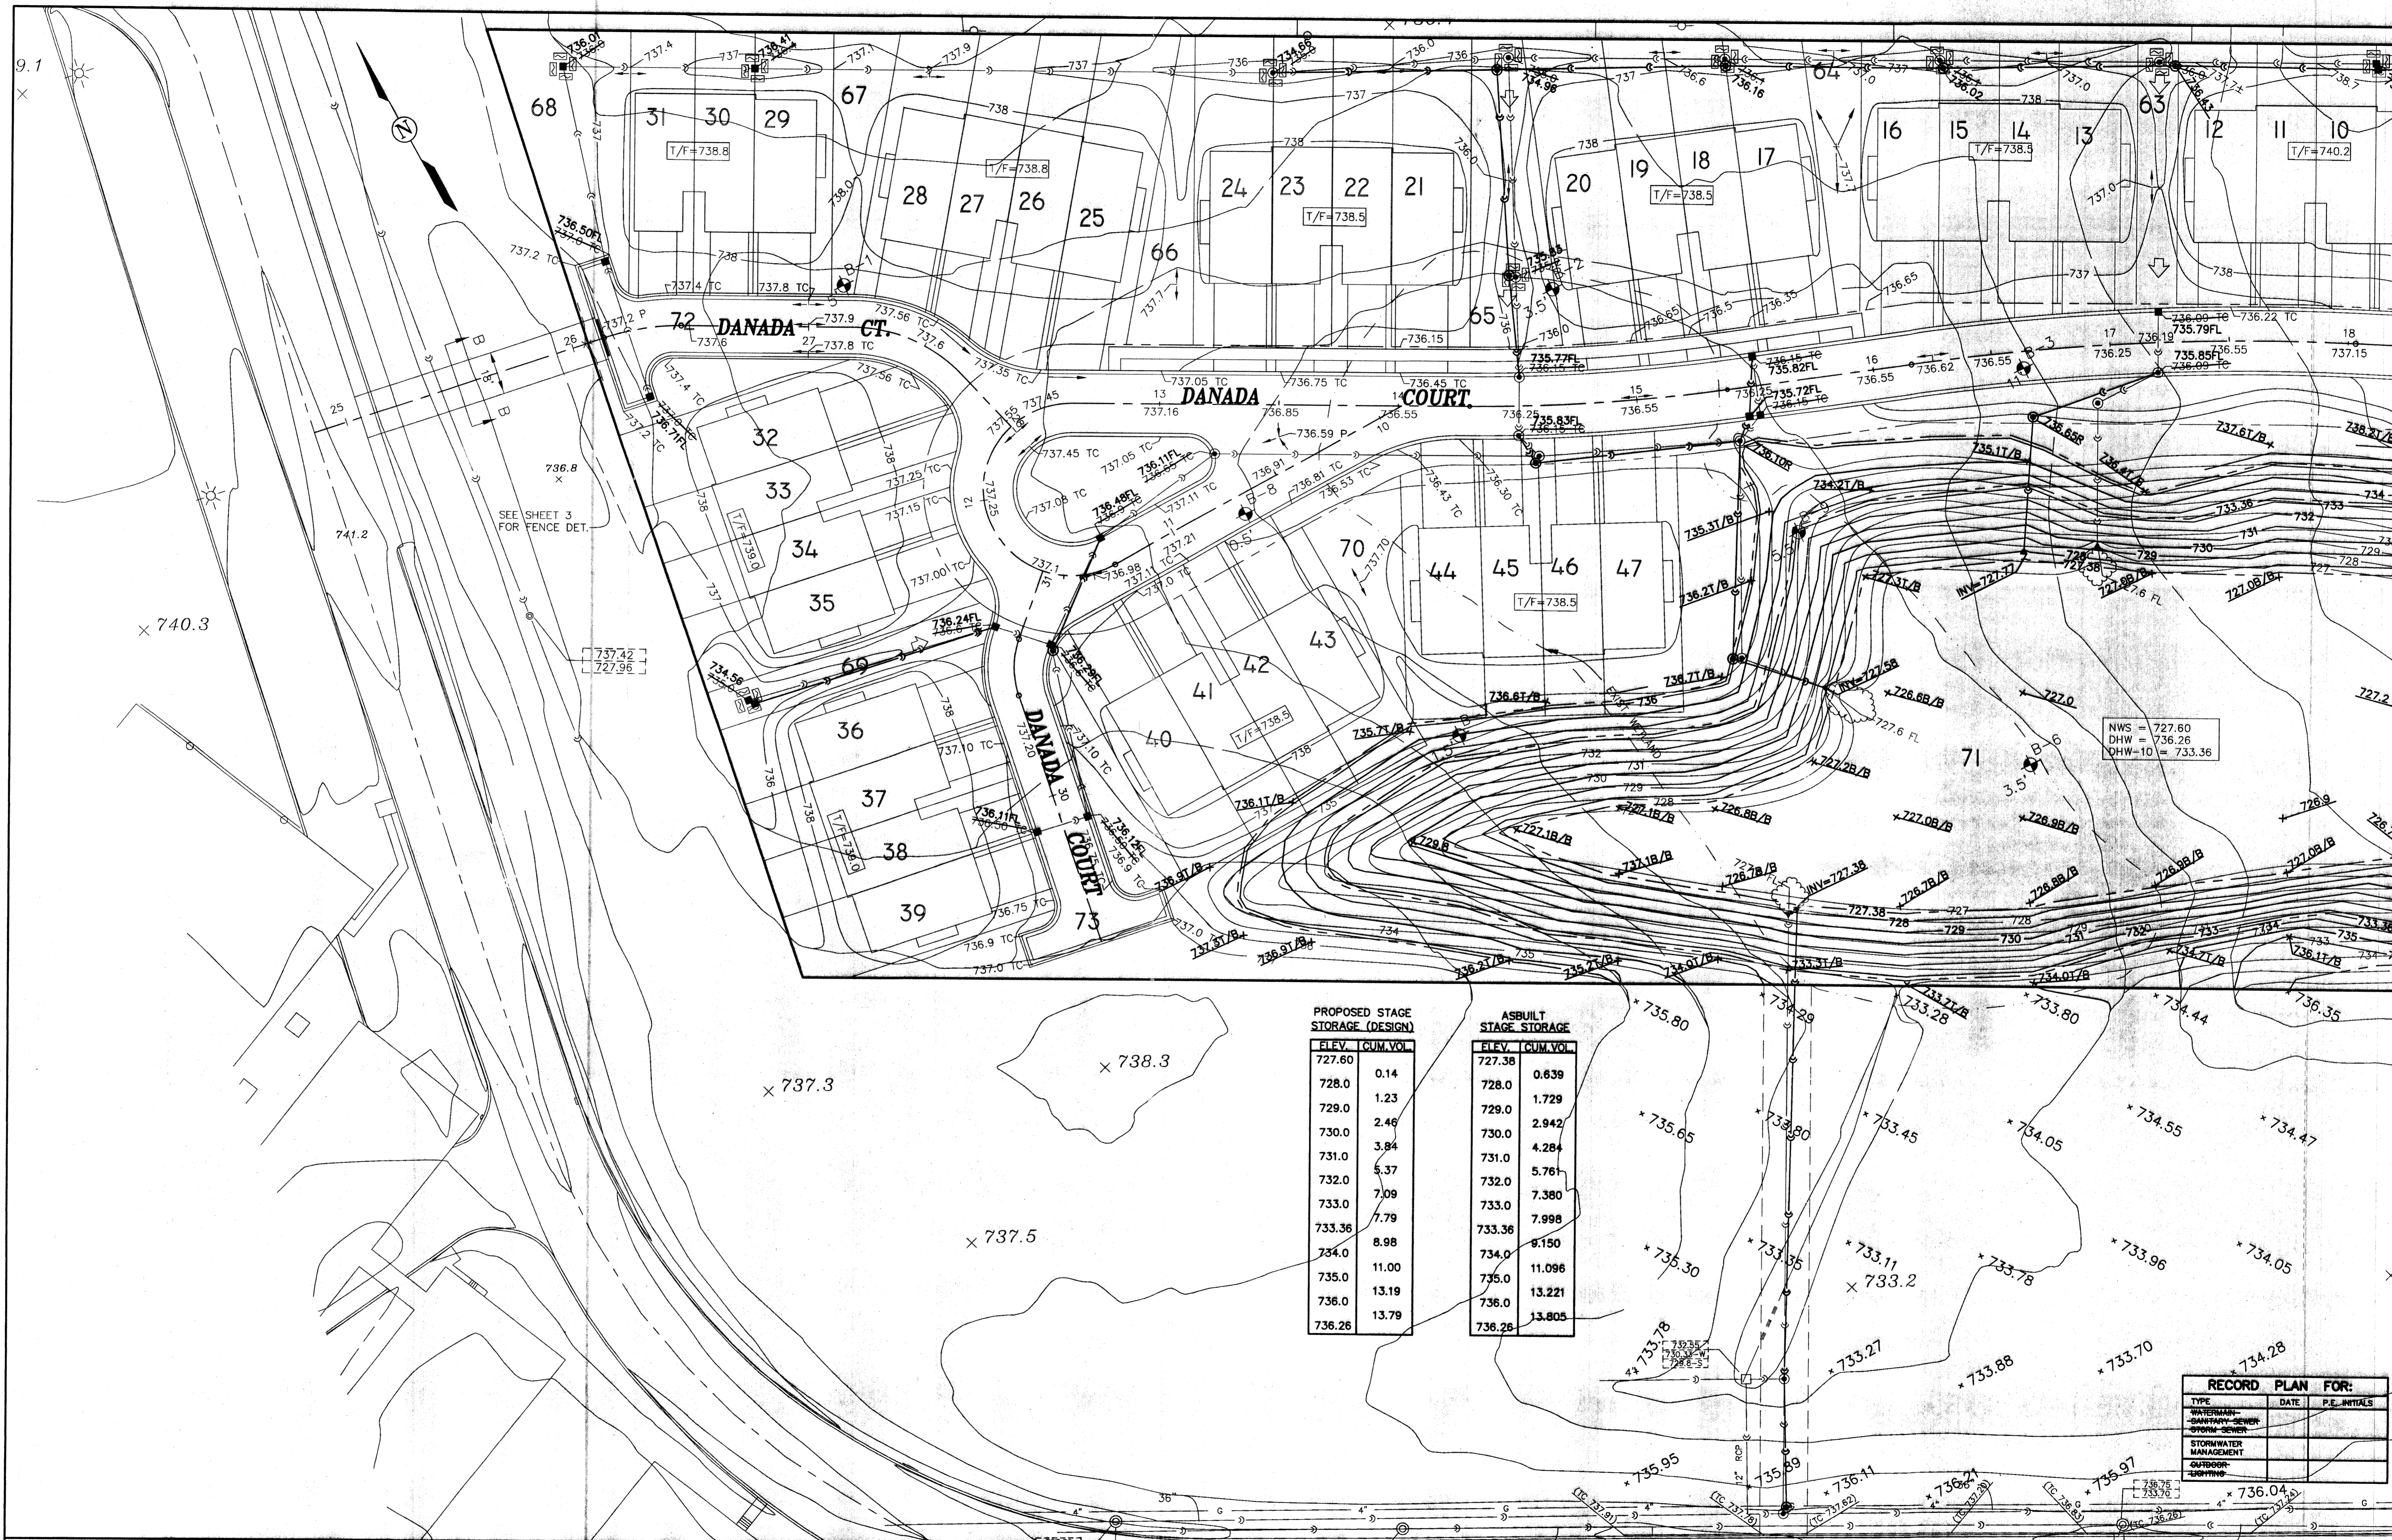

| RECORD PLAN FOR: | | |
|-----------------------|------|---------------|
| TYPE | DATE | P.E. INITIALS |
| WATERMAN-SEWER | | |
| STORM-SEWER | | |
| STORMWATER MANAGEMENT | | |
| OUTDOOR LIGHTING | | |

ROAKE AND ASSOCIATES, INC.
 CONSULTING ENGINEERS • LAND SURVEYORS • PLANNERS
 1887 HIGH GROVE LN • NAPERVILLE IL 60540 • (708) 366-3232

PREPARED FOR:
CENTURY MANAGEMENT AND DEVELOPMENT COMPANY
 199 SOUTH ADDISON ROAD, SUITE 100
 WOODDALE, ILLINOIS 60191
 (630) 787-0873



| REVISIONS | | | | | |
|-----------|---------|-----------------------------|-----|------|-------------|
| NO. | DATE | DESCRIPTION | NO. | DATE | DESCRIPTION |
| 1. | 1/26/00 | REVISE STAGE STORAGE TO DHW | | | |
| 2. | 8/28/00 | NO REV. THIS SHEET | | | |

DANADA WOODS TOWNHOMES
 GRADING AND EROSION CONTROL PLAN-RECORD DRAWING
 DRN/CKD BY: SPM/SAR DISC NO.: AB4821GR FLD. BK./PG. 87/1 SHEET NO. 4 OF 16
 SCALE: 1"=30' DATE: 11-29-99 JOB NO.: 482.001

G:\482\001\AB4821GR Mon Aug 28 14:54:33 2000 SM

EXHIBIT 2C

“EXIST” EXISTING CONDITIONS PONDPACK MODEL

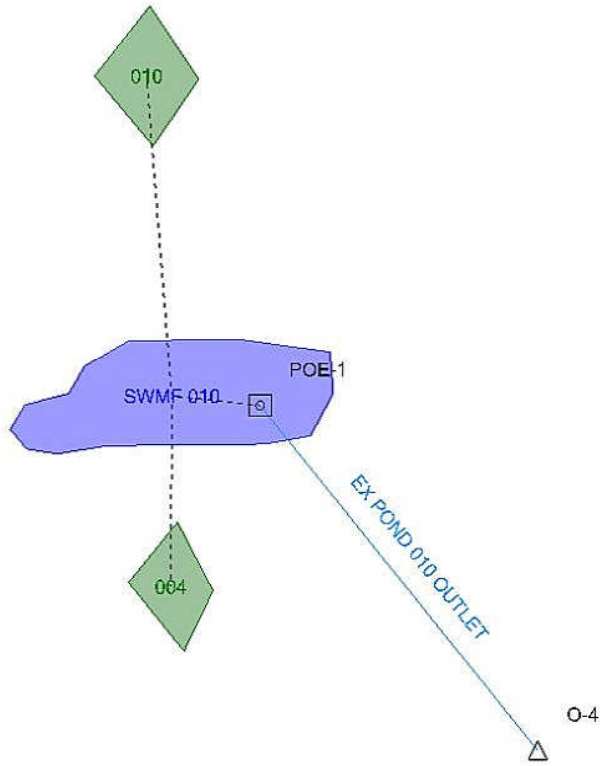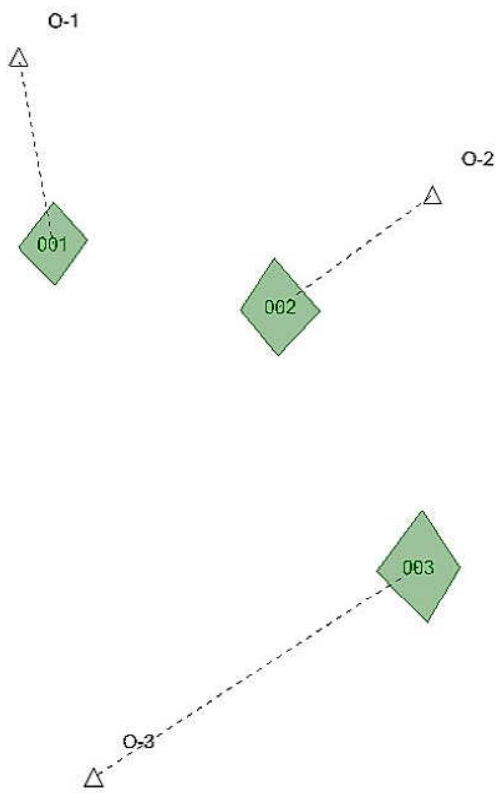

Scenario Calculation Summary

| Scenario Summary | |
|-------------------------------------|------------------------------|
| ID | 1 |
| Label | 100Yr 24Hr |
| Notes | |
| Active Topology | Base Active Topology |
| Hydrology | Base Hydrology |
| Rainfall Runoff | 100Yr 24Hr |
| Physical | Base Physical |
| Initial Condition | Base Initial Condition |
| Boundary Condition | Base Boundary Condition |
| Infiltration and Inflow | Base Infiltration and Inflow |
| Output | Base Output |
| User Data Extensions | Base User Data Extensions |
| PondPack Engine Calculation Options | 72Hr |

| Output Summary | | | |
|------------------|-------------|----------|--------------|
| Output Increment | 0.050 hours | Duration | 72.000 hours |

| Rainfall Summary | | | |
|------------------|--------|---------------|------------------|
| Return Event Tag | 100 | Rainfall Type | Time-Depth Curve |
| Total Depth | 8.6 in | Storm Event | 100YR-24HR |

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|--------------------|------------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| 001 | 100Yr 24Hr | 100 | None | 1.314 | 16.150 | 1.91 | (N/A) | (N/A) |
| 002 | 100Yr 24Hr | 100 | None | 6.022 | 16.150 | 8.62 | (N/A) | (N/A) |
| 003 | 100Yr 24Hr | 100 | None | 21.011 | 16.050 | 27.59 | (N/A) | (N/A) |
| 004 | 100Yr 24Hr | 100 | None | 2.981 | 16.100 | 4.41 | (N/A) | (N/A) |
| 010 | 100Yr 24Hr | 100 | None | 21.283 | 16.050 | 27.78 | (N/A) | (N/A) |
| O-1 | 100Yr 24Hr | 100 | None | 1.314 | 16.150 | 1.91 | (N/A) | (N/A) |
| O-2 | 100Yr 24Hr | 100 | None | 6.022 | 16.150 | 8.62 | (N/A) | (N/A) |
| O-3 | 100Yr 24Hr | 100 | None | 21.011 | 16.050 | 27.59 | (N/A) | (N/A) |
| O-4 | 100Yr 24Hr | 100 | None | 10.317 | 24.100 | 5.18 | (N/A) | (N/A) |
| O-4 | 100Yr 24Hr | 100 | None | -0.424 | 3.700 | -1.12 | (N/A) | (N/A) |
| SWMF 010 (IN) | 100Yr 24Hr | 100 | None | 24.264 | 16.050 | 32.18 | (N/A) | (N/A) |
| SWMF 010 (OUT) | 100Yr 24Hr | 100 | None | 10.317 | 24.100 | 5.18 | 736.58 | 22.005 |
| SWMF 010 (Reverse) | 100Yr 24Hr | 100 | None | -0.424 | 3.700 | -1.12 | (N/A) | (N/A) |

Executive Summary (Links)

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|--------------------|---------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| EX POND 010 OUTLET | Pond Outlet | Upstream | 24.264 | 16.050 | 32.18 | SWMF 010 | Pond Inflow |
| EX POND 010 OUTLET | Pond Outlet | Outflow | 10.317 | 24.100 | 5.18 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Negative Flow | Outflow | -0.424 | 3.700 | -1.12 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Pond Outlet | Link | 10.317 | 24.100 | 5.18 | | |
| EX POND 010 OUTLET | Negative Flow | Link | -0.424 | 3.700 | -1.12 | | |
| EX POND 010 OUTLET | Pond Outlet | Downstream | 10.317 | 24.100 | 5.18 | O-4 | |
| EX POND 010 OUTLET | Negative Flow | Downstream | -0.424 | 3.700 | -1.12 | O-4 | |

Scenario Calculation Summary

| Scenario Summary | |
|-------------------------------------|----------------------------------|
| ID | 47 |
| Label | 100Yr 1Hr |
| Notes | |
| Active Topology | <I> Base Active Topology |
| Hydrology | <I> Base Hydrology |
| Rainfall Runoff | 100Yr 1Hr |
| Physical | <I> Base Physical |
| Initial Condition | <I> Base Initial Condition |
| Boundary Condition | <I> Base Boundary Condition |
| Infiltration and Inflow | <I> Base Infiltration and Inflow |
| Output | <I> Base Output |
| User Data Extensions | <I> Base User Data Extensions |
| PondPack Engine Calculation Options | 24Hr |

| Output Summary | | | |
|------------------|-------------|----------|--------------|
| Output Increment | 0.050 hours | Duration | 24.000 hours |

| Rainfall Summary | | | |
|------------------|--------|---------------|------------------|
| Return Event Tag | 100 | Rainfall Type | Time-Depth Curve |
| Total Depth | 4.0 in | Storm Event | 100YR- 1HR |

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|--------------------|-----------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| 001 | 100Yr 1Hr | 100 | None | 0.354 | 0.800 | 4.87 | (N/A) | (N/A) |
| 002 | 100Yr 1Hr | 100 | None | 1.678 | 0.800 | 21.94 | (N/A) | (N/A) |
| 003 | 100Yr 1Hr | 100 | None | 7.287 | 0.700 | 101.26 | (N/A) | (N/A) |
| 004 | 100Yr 1Hr | 100 | None | 0.764 | 0.650 | 11.50 | (N/A) | (N/A) |
| 010 | 100Yr 1Hr | 100 | None | 7.503 | 0.550 | 120.23 | (N/A) | (N/A) |
| O-1 | 100Yr 1Hr | 100 | None | 0.354 | 0.800 | 4.87 | (N/A) | (N/A) |
| O-2 | 100Yr 1Hr | 100 | None | 1.678 | 0.800 | 21.94 | (N/A) | (N/A) |
| O-3 | 100Yr 1Hr | 100 | None | 7.287 | 0.700 | 101.26 | (N/A) | (N/A) |
| O-4 | 100Yr 1Hr | 100 | None | 2.374 | 1.900 | 1.37 | (N/A) | (N/A) |
| O-4 | 100Yr 1Hr | 100 | None | -0.028 | 0.250 | -1.11 | (N/A) | (N/A) |
| SWMF 010 (IN) | 100Yr 1Hr | 100 | None | 8.266 | 0.600 | 130.98 | (N/A) | (N/A) |
| SWMF 010 (OUT) | 100Yr 1Hr | 100 | None | 2.374 | 1.900 | 1.37 | 732.95 | 8.151 |
| SWMF 010 (Reverse) | 100Yr 1Hr | 100 | None | -0.028 | 0.250 | -1.11 | (N/A) | (N/A) |

Executive Summary (Links)

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|--------------------|---------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| EX POND 010 OUTLET | Pond Outlet | Upstream | 8.266 | 0.600 | 130.98 | SWMF 010 | Pond Inflow |
| EX POND 010 OUTLET | Pond Outlet | Outflow | 2.374 | 1.900 | 1.37 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Negative Flow | Outflow | -0.028 | 0.250 | -1.11 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Pond Outlet | Link | 2.374 | 1.900 | 1.37 | | |
| EX POND 010 OUTLET | Negative Flow | Link | -0.028 | 0.250 | -1.11 | | |
| EX POND 010 OUTLET | Pond Outlet | Downstream | 2.374 | 1.900 | 1.37 | O-4 | |
| EX POND 010 OUTLET | Negative Flow | Downstream | -0.028 | 0.250 | -1.11 | O-4 | |

Scenario Calculation Summary

| Scenario Summary | |
|-------------------------------------|----------------------------------|
| ID | 67 |
| Label | 2Yr 2Hr |
| Notes | |
| Active Topology | <I> Base Active Topology |
| Hydrology | <I> Base Hydrology |
| Rainfall Runoff | 2Yr 2Hr |
| Physical | <I> Base Physical |
| Initial Condition | <I> Base Initial Condition |
| Boundary Condition | <I> Base Boundary Condition |
| Infiltration and Inflow | <I> Base Infiltration and Inflow |
| Output | <I> Base Output |
| User Data Extensions | <I> Base User Data Extensions |
| PondPack Engine Calculation Options | 24Hr |

| Output Summary | | | |
|------------------|-------------|----------|--------------|
| Output Increment | 0.050 hours | Duration | 24.000 hours |

| Rainfall Summary | | | |
|------------------|--------|---------------|------------------|
| Return Event Tag | 2 | Rainfall Type | Time-Depth Curve |
| Total Depth | 1.9 in | Storm Event | 2YR- 2HR |

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|--------------------|----------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| 001 | 2Yr 2Hr | 2 | None | 0.056 | 1.450 | 0.48 | (N/A) | (N/A) |
| 002 | 2Yr 2Hr | 2 | None | 0.287 | 1.450 | 2.39 | (N/A) | (N/A) |
| 003 | 2Yr 2Hr | 2 | None | 1.979 | 1.000 | 17.61 | (N/A) | (N/A) |
| 004 | 2Yr 2Hr | 2 | None | 0.105 | 1.400 | 0.97 | (N/A) | (N/A) |
| 010 | 2Yr 2Hr | 2 | None | 2.102 | 0.850 | 20.97 | (N/A) | (N/A) |
| O-1 | 2Yr 2Hr | 2 | None | 0.056 | 1.450 | 0.48 | (N/A) | (N/A) |
| O-2 | 2Yr 2Hr | 2 | None | 0.287 | 1.450 | 2.39 | (N/A) | (N/A) |
| O-3 | 2Yr 2Hr | 2 | None | 1.979 | 1.000 | 17.61 | (N/A) | (N/A) |
| O-4 | 2Yr 2Hr | 2 | None | 0.000 | 0.000 | 0.00 | (N/A) | (N/A) |
| O-4 | 2Yr 2Hr | 2 | None | -0.567 | 0.600 | -1.11 | (N/A) | (N/A) |
| SWMF 010 (IN) | 2Yr 2Hr | 2 | None | 2.208 | 0.850 | 21.48 | (N/A) | (N/A) |
| SWMF 010 (OUT) | 2Yr 2Hr | 2 | None | 0.000 | 0.000 | 0.00 | 729.34 | 2.775 |
| SWMF 010 (Reverse) | 2Yr 2Hr | 2 | None | -0.567 | 0.600 | -1.11 | (N/A) | (N/A) |

Executive Summary (Links)

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|--------------------|---------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| EX POND 010 OUTLET | Pond Outlet | Upstream | 2.208 | 0.850 | 21.48 | SWMF 010 | Pond Inflow |
| EX POND 010 OUTLET | Pond Outlet | Outflow | 0.000 | 0.000 | 0.00 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Negative Flow | Outflow | -0.567 | 0.600 | -1.11 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Pond Outlet | Link | 0.000 | 0.000 | 0.00 | | |
| EX POND 010 OUTLET | Negative Flow | Link | -0.567 | 0.600 | -1.11 | | |
| EX POND 010 OUTLET | Pond Outlet | Downstream | 0.000 | 0.000 | 0.00 | O-4 | |
| EX POND 010 OUTLET | Negative Flow | Downstream | -0.567 | 0.600 | -1.11 | O-4 | |

Table of Contents

| | | |
|--------------------------------|---------------------------------------|----|
| UPDATED 100YR 12HR-48HR 001 | Time-Depth Curve, 100 years | 1 |
| 002 | Unit Hydrograph Summary, 100 years | 2 |
| 003 | Unit Hydrograph Summary, 100 years | 4 |
| 004 | Unit Hydrograph Summary, 100 years | 6 |
| 010 | Unit Hydrograph Summary, 100 years | 8 |
| | Unit Hydrograph Summary, 100 years | 10 |
| SWMF 010 | Elevation vs. Volume Curve, 100 years | 12 |
| Ex Pond 010 Outlet | Outlet Input Data, 100 years | 13 |

Subsection: Time-Depth Curve
 Label: UPDATED 100YR 12HR-48HR

Return Event: 100 years
 Storm Event: 100YR-24HR

Time-Depth Curve: 100YR-24HR

| | |
|--------------|--------------|
| Label | 100YR-24HR |
| Start Time | 0.000 hours |
| Increment | 1.000 hours |
| End Time | 24.000 hours |
| Return Event | 100 years |

CUMULATIVE RAINFALL (in)
Output Time Increment = 1.000 hours
Time on left represents time for first value in each row.

| Time (hours) | Depth (in) | Depth (in) | Depth (in) | Depth (in) | Depth (in) |
|--------------|------------|------------|------------|------------|------------|
| 0.000 | 0.0 | 0.2 | 0.4 | 0.6 | 0.8 |
| 5.000 | 1.0 | 1.2 | 1.4 | 1.7 | 2.0 |
| 10.000 | 2.3 | 2.7 | 3.1 | 3.8 | 4.5 |
| 15.000 | 5.2 | 6.0 | 6.7 | 7.3 | 7.7 |
| 20.000 | 8.0 | 8.2 | 8.3 | 8.4 | 8.6 |

Subsection: Unit Hydrograph Summary
 Label: 001

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 72.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.605 hours |
| Area (User Defined) | 3.220 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.081 hours |
| Time to Peak (Computed) | 16.133 hours |
| Flow (Peak, Computed) | 1.91 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.150 hours |
| Flow (Peak Interpolated Output) | 1.91 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 69.500 |
| Area (User Defined) | 3.220 acres |
| Maximum Retention (Pervious) | 4.4 in |
| Maximum Retention (Pervious, 20 percent) | 0.9 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 4.9 in |
| Runoff Volume (Pervious) | 1.314 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 1.314 ac-ft |

| | |
|--------------------------------------|-------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.605 hours |
| Computational Time Increment | 0.081 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 6.03 ft ³ /s |
| Unit peak time, Tp | 0.403 hours |

Subsection: Unit Hydrograph Summary
Label: 001

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 1.613 hours |
| Total unit time, Tb | 2.017 hours |

Subsection: Unit Hydrograph Summary
 Label: 002

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 72.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.681 hours |
| Area (User Defined) | 14.230 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.091 hours |
| Time to Peak (Computed) | 16.162 hours |
| Flow (Peak, Computed) | 8.62 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.150 hours |
| Flow (Peak Interpolated Output) | 8.62 ft ³ /s |

| | |
|---|--------------|
| Drainage Area | |
| SCS CN (Composite) | 71.000 |
| Area (User Defined) | 14.230 acres |
| Maximum Retention (Pervious) | 4.1 in |
| Maximum Retention (Pervious, 20 percent) | 0.8 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 5.1 in |
| Runoff Volume (Pervious) | 6.022 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 6.022 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.681 hours |
| Computational Time Increment | 0.091 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 23.68 ft ³ /s |
| Unit peak time, Tp | 0.454 hours |

Subsection: Unit Hydrograph Summary
Label: 002

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 1.816 hours |
| Total unit time, Tb | 2.270 hours |

Subsection: Unit Hydrograph Summary
 Label: 003

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 72.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.625 hours |
| Area (User Defined) | 39.530 acres |

| | |
|--|--------------------------|
| Computational Time Increment | 0.083 hours |
| Time to Peak (Computed) | 16.083 hours |
| Flow (Peak, Computed) | 27.60 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.050 hours |
| Flow (Peak Interpolated Output) | 27.59 ft ³ /s |

| | |
|---|--------------|
| Drainage Area | |
| SCS CN (Composite) | 81.800 |
| Area (User Defined) | 39.530 acres |
| Maximum Retention (Pervious) | 2.2 in |
| Maximum Retention (Pervious, 20 percent) | 0.4 in |

| | |
|---------------------------------------|--------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 6.4 in |
| Runoff Volume (Pervious) | 21.011 ac-ft |

| | |
|---|--------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 21.011 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.625 hours |
| Computational Time Increment | 0.083 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 71.66 ft ³ /s |
| Unit peak time, Tp | 0.417 hours |

Subsection: Unit Hydrograph Summary
Label: 003

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 1.667 hours |
| Total unit time, Tb | 2.083 hours |

Subsection: Unit Hydrograph Summary
 Label: 004

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 72.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.482 hours |
| Area (User Defined) | 7.680 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.064 hours |
| Time to Peak (Computed) | 16.131 hours |
| Flow (Peak, Computed) | 4.41 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.100 hours |
| Flow (Peak Interpolated Output) | 4.41 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 67.500 |
| Area (User Defined) | 7.680 acres |
| Maximum Retention (Pervious) | 4.8 in |
| Maximum Retention (Pervious, 20 percent) | 1.0 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 4.7 in |
| Runoff Volume (Pervious) | 2.981 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 2.981 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.482 hours |
| Computational Time Increment | 0.064 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 18.05 ft ³ /s |
| Unit peak time, Tp | 0.321 hours |

Subsection: Unit Hydrograph Summary
Label: 004

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 1.285 hours |
| Total unit time, Tb | 1.607 hours |

Subsection: Unit Hydrograph Summary
 Label: 010

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 72.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.471 hours |
| Area (User Defined) | 39.370 acres |

| | |
|--|--------------------------|
| Computational Time Increment | 0.063 hours |
| Time to Peak (Computed) | 16.014 hours |
| Flow (Peak, Computed) | 27.78 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.050 hours |
| Flow (Peak Interpolated Output) | 27.78 ft ³ /s |

| | |
|---|--------------|
| Drainage Area | |
| SCS CN (Composite) | 82.700 |
| Area (User Defined) | 39.370 acres |
| Maximum Retention (Pervious) | 2.1 in |
| Maximum Retention (Pervious, 20 percent) | 0.4 in |

| | |
|---------------------------------------|--------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 6.5 in |
| Runoff Volume (Pervious) | 21.283 ac-ft |

| | |
|---|--------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 21.283 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.471 hours |
| Computational Time Increment | 0.063 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 94.71 ft ³ /s |
| Unit peak time, Tp | 0.314 hours |

Subsection: Unit Hydrograph Summary
Label: 010

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 1.256 hours |
| Total unit time, Tb | 1.570 hours |

Subsection: Elevation vs. Volume Curve
Label: SWMF 010

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 726.87 | 0.000 |
| 727.00 | 0.130 |
| 728.00 | 1.186 |
| 729.00 | 2.342 |
| 730.00 | 3.601 |
| 731.00 | 4.985 |
| 732.00 | 6.506 |
| 733.00 | 8.240 |
| 734.00 | 10.504 |
| 735.00 | 13.807 |
| 736.00 | 18.389 |
| 736.39 | 20.651 |
| 737.00 | 24.999 |

Subsection: Outlet Input Data
 Label: Ex Pond 010 Outlet

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 726.87 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward + Reverse | TW | 726.88 | 737.00 |
| Irregular Weir | Weir - 1 | Forward + Reverse | TW | 736.39 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: Ex Pond 010 Outlet

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 726.67 ft |
| Orifice Diameter | 5.25 in |
| Orifice Coefficient | 0.600 |

Structure ID: Weir - 1
Structure Type: Irregular Weir

| Station (ft) | Elevation (ft) |
|-----------------|-------------------|
| 0.00 | 737.00 |
| 48.90 | 736.70 |
| 92.90 | 736.39 |
| 98.90 | 736.55 |
| 145.30 | 736.88 |
| 168.70 | 737.00 |

Lowest Elevation 736.39 ft
 Weir Coefficient 3.00 (ft^{0.5})/s

Index

0

001 (Unit Hydrograph Summary, 100 years)...2, 3

002 (Unit Hydrograph Summary, 100 years)...4, 5

003 (Unit Hydrograph Summary, 100 years)...6, 7

004 (Unit Hydrograph Summary, 100 years)...8, 9

010 (Unit Hydrograph Summary, 100 years)...10, 11

E

Ex Pond 010 Outlet (Outlet Input Data, 100 years)...13, 14

S

SWMF 010 (Elevation vs. Volume Curve, 100 years)...12

U

UPDATED 100YR 12HR-48HR (Time-Depth Curve, 100 years)...1


EXHIBIT 2D

**PROPOSED CONDITIONS
WATERSHED EXHIBIT**


PROPOSED WATERSHED EXHIBIT

FOR

NAPER COMMONS

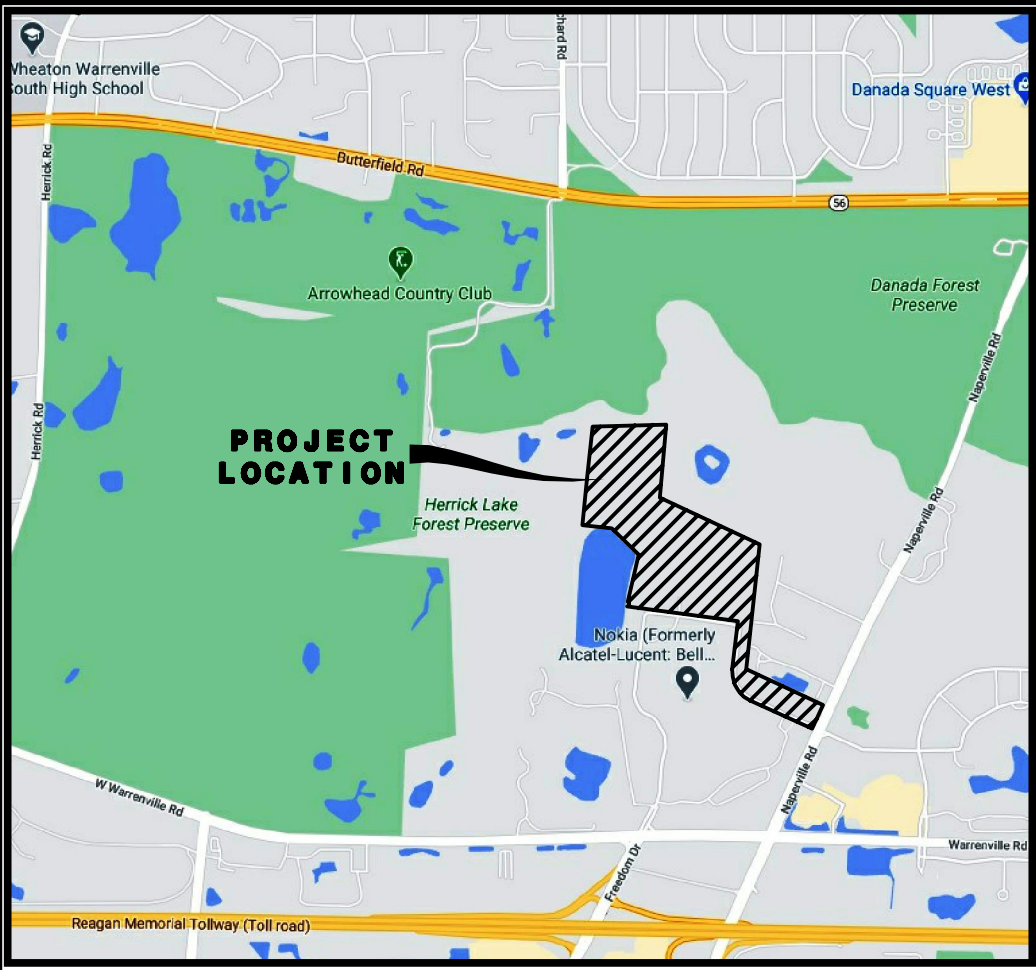

LOCATION MAP

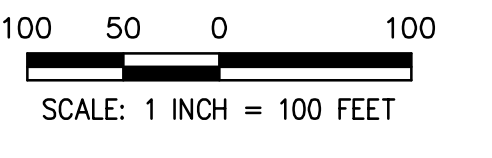

SUBAREA 001
3.01 Ac.
CN = 89.2
Tc = 0.25 Hr

SUBAREA 002
21.17 Ac.
CN = 87.7
Tc = 0.34 Hr

SUBAREA 003
28.08 Ac.
CN = 84.0
Tc = 0.33 Hr

SUBAREA 007
3.71 Ac.
CN = 84.0
Tc = 0.25 Hr

SUBAREA 008
0.68 Ac.
CN = 90.0
Tc = 0.083 Hr

SUBAREA 005
4.03 Ac.
CN = 60.4
Tc = 0.377 Hr

SUBAREA 006
3.18 Ac.
CN = 88.7
Tc = 0.271 Hr

LEGEND

WATERSHED BOUNDARY

OVERLAND DRAINAGE ARROW

PREPARED FOR:
PULTE HOME COMPANY, LLC
1900 E. GOLF ROAD, SUITE 300
SCHAUMBURG, IL 60173
(847) 230-5400

PREPARED BY:
CEMCON, Ltd.
Consulting Engineers, Land Surveyors & Planners
2280 White Oak Circle, Suite 100
Aurora, Illinois 60502-9675
PH: 630.862.2100
E-Mail: cecon@cemcon.com FAX: 630.862.2199
Website: www.cemcon.com

DISC NO.: 402138 FILE NAME: WATERSHED
DRAWN BY: LAL FLD. BK. / PG. NO.: NOTES
COMPLETION DATE: 09-14-20 JOB NO.: 402.138
XREF: TOPO PROJECT MANAGER: CRM
10-16-20/JAL REVISED PER 2020-10-16 CITY COMMENTS
01-20-21/JAL REVISED PER PLAN COMMISSION MEETING 12/16
CITY OF NAPERVILLE PROJECT NO. 1 20-1000088
SHEET 1 OF 1
Copyright © 2020 CEMCON, Ltd. All rights reserved.

EXHIBIT 2E

**PROPOSED CONDITIONS
SUPPORTING DOCUMENTATION**

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 001

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Single Family, 1/5 Ac. Lots (assumed 50% impervious) | 86 | | | 1.15 | 98.9 |
| C | Open Space | 74 | | | 0.53 | 39.22 |
| C | SWMF | 98 | | | 0.59 | 57.82 |
| C | Impervious Area (NWL) | 98 | | | 0.74 | 72.52 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 3.01 | 268.460 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{268.460}{3.010} = 89.189$$

Use CN = 89.2

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 002

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area X_ acres mi2 % | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Single Family, 1/5 Ac. Lots (assumed 50% impervious) | 86 | | | 11.52 | 990.72 |
| C | Open Space | 74 | | | 0.74 | 54.76 |
| C | SWMF | 98 | | | 0.67 | 65.66 |
| C | Impervious Area (NWL, paving) | 98 | | | 0.6 | 58.8 |
| C | Single Family, 1/8 Ac. Lots (assumed 65% impervious) | 90 | | | 7.69 | 692.1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 21.22 | 1862.040 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{1862.040}{21.220} = 87.749$$

Use CN = 87.7

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/9/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 003

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area X_ acres mi2 % | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Townhomes (assumed 65% impervious) | 90 | | | 2.35 | 211.5 |
| C | Open Space | 74 | | | 3.52 | 260.48 |
| C | SWMF | 98 | | | 1.65 | 161.7 |
| C | Impervious Area (NWL, paving) | 98 | | | 2.06 | 201.88 |
| C | Single Family, 1/8 Ac. Lots (assumed 65% impervious) | 90 | | | 18.29 | 1646.1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 27.87 | 2481.660 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{2481.660}{27.870} = 89.044$$

Use CN = 89.0

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/8/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 005

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|----------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | X_ acres mi2 % | |
| C | Townhomes (assumed 65% impervious) | 90 | | | 1.82 | 163.8 |
| C | Open Space | 74 | | | 0.61 | 45.14 |
| C | SWMF | 98 | | | 0.73 | 71.54 |
| C | Impervious Area (NWL, paving) | 98 | | | 0.19 | 18.62 |
| C | Single Family, 1/8 Ac. Lots (assumed 65% impervious) | 90 | | | 0.88 | 79.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 4.23 | 378.300 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{378.300}{4.230} = 89.433$$

Use CN = 89.4

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/8/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 006

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area X_ acres mi2 % | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Townhomes (assumed 65% impervious) | 90 | | | 1.28 | 115.2 |
| C | Open Space | 74 | | | 0.88 | 65.12 |
| C | SWMF | 98 | | | 0.56 | 54.88 |
| C | Impervious Area (NWL, paving) | 98 | | | 0.46 | 45.08 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 3.18 | 280.280 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{280.280}{3.180} = 88.138$$

Use CN = 88.1

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/8/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 007

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area X_ acres mi2 % | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|------------------------------|-------------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Single Family, 1/8 Ac. Lots (assumed 65% impervious) | 90 | | | 0.57 | 51.3 |
| C | Open Space | 74 | | | 0.18 | 13.32 |
| C | SWMF | 98 | | | 0.19 | 18.62 |
| C | Impervious Area (NWL, paving) | 98 | | | 0.07 | 6.86 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 1.01 | 90.100 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{90.100}{1.010} = 89.208$$

Use CN = 89.2

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Worksheet 2: Runoff Curve Number and Runoff

Project Nokia Site By JMH Date 9/8/2020
 Location DuPage County, IL Checked _____ Date _____

Circle one: Present Developed SUBAREA 008

1. Runoff curve number (CN)

| Soil Name and Hydrologic Group | Cover Description (cover type, treatment, and hydrologic condition; percent impervious; unconnected/connected impervious area ratio) | CN ^{1/} | | | Area _X_ acres _mi2 _% | Product of CN x Area |
|--------------------------------|---|------------------|----------|----------|---------------------------------|----------------------|
| | | Table 2-2 | Fig. 2-3 | Fig. 2-4 | | |
| C | Townhomes (assumed 65% impervious) | 90 | | | 0.68 | 61.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Totals = | | | | | 0.68 | 61.200 |

1/ Use only one CN source per line.

$$\text{CN (weighted)} = \frac{\text{Total Product}}{\text{Total Area}} = \frac{61.200}{0.680} = \underline{90.000}$$

Use CN = 90.0

2. Runoff

Frequency yr
 Rainfall in
 Runoff, Q in
 (Use P and CN with table 2-1, fig. 2-1, or eqs. 2-3 and 2-4.)

| Storm #1 | Storm #2 | Storm #3 |
|----------|----------|----------|
| | | |
| | | |
| | | |

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/8/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 001

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| | | |
|---|------------|---|
| Segment ID | | |
| 1. Surface Description | Grass | |
| 2. Manning's roughness coeff., n | 0.24 | |
| 3. Flow length, L (total L ≤ 300 ft) | ft 100 | |
| 4. Two-yr 24-hr rainfall, P ₂ | in 3.34 | |
| 5. Land slope, s | ft/ft 0.02 | |
| 6. $T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$ | hr 0.233 | + = 0.233 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| | | |
|------------------------------|----------|---|
| Segment ID | | |
| 7. Surface description | unpaved | |
| 8. Flow length, L | 130 | |
| 9. Watercourse slope, s | 0.02 | |
| 10. Average velocity, V | 2.30 | |
| 11. $T_t = \frac{L}{3600 V}$ | hr 0.016 | + = 0.016 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|-----------------|---|
| Segment ID | | |
| 12. Cross sectional flow area, a | ft ² | |
| 13. Wetted perimeter, pw | ft | |
| 14. Hydraulic radius, r= a/pw compute r | ft | |
| 15. Channel Slope, s | ft/ft | |
| 16. Manning's roughness coeff., n | | |
| 17. $V = 1.49 r^{2/3} s^{1/2} / n$ | ft/s 3 | |
| 18. Flow length, L | ft | |
| 19. $T_t = \frac{L}{3600 V}$ | hr | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.248
 min 15

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/8/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 002

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| | | |
|---|------------|-----------|
| Segment ID | | |
| 1. Surface Description | Grass | |
| 2. Manning's roughness coeff., n | 0.24 | |
| 3. Flow length, L (total L ≤ 300 ft) | ft 100 | |
| 4. Two-yr 24-hr rainfall, P ₂ | in 3.34 | |
| 5. Land slope, s | ft/ft 0.02 | |
| 6. $T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$ | hr 0.233 | + = 0.233 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|----------|-----------|
| Segment ID | | |
| 7. Surface description (paved or unpaved) | unpaved | |
| 8. Flow length, L | 280 | |
| 9. Watercourse slope, s | 0.02 | |
| 10. Average velocity, V (figure 3-1) | 2.30 | |
| 11. $T_t = \frac{L}{3600 V}$ | hr 0.034 | + = 0.034 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|-----------------|-----------|
| Segment ID | | |
| 12. Cross sectional flow area, a | ft ² | |
| 13. Wetted perimeter, pw | ft | |
| 14. Hydraulic radius, r= a/pw compute r | ft | |
| 15. Channel Slope, s | ft/ft | |
| 16. Manning's roughness coeff., n | | |
| 17. $V = 1.49 r^{2/3} s^{1/2} / n$ | ft/s 3 | |
| 18. Flow length, L | ft 800 | |
| 19. $T_t = \frac{L}{3600 V}$ | hr 0.0741 | + = 0.074 |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.341
 min 20

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/8/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 003

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| | | |
|---|------------|-----------|
| Segment ID | | |
| 1. Surface Description | Grass | |
| 2. Manning's roughness coeff., n | 0.24 | |
| 3. Flow length, L (total L ≤ 300 ft) | ft 100 | |
| 4. Two-yr 24-hr rainfall, P ₂ | in 3.34 | |
| 5. Land slope, s | ft/ft 0.02 | |
| 6. $T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$ | hr 0.233 | + = 0.233 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|----------|-----------------|
| Segment ID | | |
| 7. Surface description (paved or unpaved) | unpaved | paved |
| 8. Flow length, L | 360 | 120 |
| 9. Watercourse slope, s | 0.02 | 0.01 |
| 10. Average velocity, V (figure 3-1) | 2.30 | 2.07 |
| 11. $T_t = \frac{L}{3600 V}$ | hr 0.043 | + 0.016 = 0.059 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| | | |
|---|-----------------|-----------|
| Segment ID | | |
| 12. Cross sectional flow area, a | ft ² | |
| 13. Wetted perimeter, pw | ft | |
| 14. Hydraulic radius, r= a/pw compute r | ft | |
| 15. Channel Slope, s | ft/ft | |
| 16. Manning's roughness coeff., n | | |
| 17. $V = 1.49 r^{2/3} s^{1/2} / n$ | ft/s 3 | |
| 18. Flow length, L | ft 440 | |
| 19. $T_t = \frac{L}{3600 V}$ | hr 0.0407 | + = 0.041 |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.333
 min 20

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/8/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 005

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|-----------|
| | Grass | |
| | 0.24 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.02 | |
| hr | 0.233 | + = 0.233 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----------|
| | unpaved | |
| | 1200 | |
| | 0.02 | |
| | 2.30 | |
| hr | 0.145 | + = 0.145 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|-----|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.377
 min 23

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/8/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 006

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|-----------|
| | Grass | |
| | 0.24 | |
| ft | 100 | |
| in | 3.34 | |
| ft/ft | 0.02 | |
| hr | 0.233 | + = 0.233 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|-----------|
| | unpaved | |
| | 320 | |
| | 0.02 | |
| | 2.30 | |
| hr | 0.039 | + = 0.039 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|-----|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.271

min 16

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/9/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 007

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|---------|
| | Grass | |
| | 0.24 | |
| | 100 | |
| ft | 3.34 | |
| in | 0.02 | |
| ft/ft | 0.233 | |
| hr | + | = 0.233 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|---------|
| | unpaved | |
| | 100 | |
| | 0.02 | |
| | 2.30 | |
| hr | 0.012 | |
| | + | = 0.012 |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|---|
| | | |
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | + | = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.245
 min 15

Project NOKIA SITE
 Location DUPAGE COUNTY, IL

By JMH Date 9/9/2020
 Checked _____ Date _____

Check one: Present Developed
 Check one: Tc Tt

SUBAREA 008

NOTES: Space for as many as two segments per flow type can be used for each worksheet.
 Include a map, schematic, or description of flow segments.

Sheet Flow (Applicable to Tc only)

1. Surface Description (Table 3-1)
2. Manning's roughness coeff., n (Table 3-1)
3. Flow length, L (total L ≤ 300 ft)
4. Two-yr 24-hr rainfall, P₂
5. Land slope, s
6.
$$T_c = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$$

| Segment ID | | |
|------------|-------|---|
| | Grass | |
| | 0.24 | |
| ft | 25 | |
| in | 3.34 | |
| ft/ft | 0.02 | |
| hr | 0.077 | + = 0.077 |

Shallow Concentrated Flow

7. Surface description (paved or unpaved)
8. Flow length, L
9. Watercourse slope, s
10. Average velocity, V (figure 3-1)
11.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|------------|---------|--|
| | unpaved | |
| | | |
| | | |
| hr | | + = |

Channel Flow

12. Cross sectional flow area, a
13. Wetted perimeter, pw
14. Hydraulic radius, r= a/pw compute r
15. Channel Slope, s
16. Manning's roughness coeff., n
17. $V = 1.49 r^{2/3} s^{1/2} / n$
18. Flow length, L
19.
$$T_t = \frac{L}{3600 V}$$

| Segment ID | | |
|-----------------|---|--|
| ft ² | | |
| ft | | |
| ft | | |
| ft/ft | | |
| ft/s | 3 | |
| ft | | |
| hr | | + = |

20. Watershed or subarea T_c or T_t (add T_t in steps 6, 11, and 19) hr 0.077

min 5

*This subarea is assumed to have the PondPack minimum Tc of 0.083 Hr.

Job #: 402138
Project: Nokia Site

Date: September 7, 2020
Revised: October 12, 2020
By: ARF

| PROP SWMF-001 | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| STAGE/ STORAGE RELATIONSHIP | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 737.5 | 29850 | 0.685 | 0.000 | 0.000 |
| 738.0 | 35250 | 0.809 | 0.374 | 0.374 |
| 739.0 | 54800 | 1.258 | 1.034 | 1.407 |
| 739.5 | 63460 | 1.457 | 0.679 | 2.086 |
| 740.0 | 69860 | 1.604 | 0.765 | 2.851 |
| 741.0 | 75260 | 1.728 | 1.666 | 4.517 |
| | | | | |
| | | | | |

Job #: 402138
Project: Nokia Site

Date: September 7, 2020
Revised: October 12, 2020
By: ARF

| PROP SWMF-002 | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| STAGE/ STORAGE RELATIONSHIP | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 732.0 | 17740 | 0.407 | 0.000 | 0.000 |
| 733.0 | 21570 | 0.495 | 0.451 | 0.451 |
| 734.0 | 25850 | 0.593 | 0.544 | 0.996 |
| 735.0 | 30510 | 0.700 | 0.647 | 1.642 |
| 736.0 | 35530 | 0.816 | 0.758 | 2.400 |
| 737.0 | 41020 | 0.942 | 0.879 | 3.279 |
| 738.0 | 46740 | 1.073 | 1.007 | 4.287 |
| 739.0 | 52820 | 1.213 | 1.143 | 5.429 |
| | | | | |

Job #: 402138
Project: Nokia Site

Date: September 7, 2020
Revised: October 12, 2020
Revised: January 18, 2021
By: ARF

| PROP SWMF-003 | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| STAGE/ STORAGE RELATIONSHIP | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC.-Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 732.0 | 40090 | 0.920 | 0.000 | 0.000 |
| 733.0 | 51080 | 1.173 | 1.046 | 1.046 |
| 734.0 | 62250 | 1.429 | 1.301 | 2.347 |
| 735.0 | 73650 | 1.691 | 1.560 | 3.907 |
| 736.0 | 85420 | 1.961 | 1.826 | 5.733 |
| 737.0 | 97440 | 2.237 | 2.099 | 7.832 |
| 738.0 | 109710 | 2.519 | 2.378 | 10.210 |
| 739.0 | 122220 | 2.806 | 2.662 | 12.872 |

Job #: 402138
Project: Nokia Site

Date: September 7, 2020
Revised:
By: ARF

| PROP SWMF-005 | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| STAGE/ STORAGE RELATIONSHIP | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 729.0 | 8430 | 0.194 | 0.000 | 0.000 |
| 730.0 | 10950 | 0.251 | 0.222 | 0.222 |
| 731.0 | 13790 | 0.317 | 0.284 | 0.506 |
| 732.0 | 17190 | 0.395 | 0.356 | 0.862 |
| 733.0 | 22080 | 0.507 | 0.451 | 1.313 |
| 734.0 | 28230 | 0.648 | 0.577 | 1.890 |
| 735.0 | 34150 | 0.784 | 0.716 | 2.606 |
| 736.0 | 40320 | 0.926 | 0.855 | 3.461 |
| 737.0 | 46720 | 1.073 | 0.999 | 4.460 |
| | | | | |

Job #: 402138
Project: Nokia Site

Date: September 7, 2020
Revised:
By: ARF

| PROP SWMF-006 | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| STAGE/ STORAGE RELATIONSHIP | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 729.0 | 14770 | 0.339 | 0.000 | 0.000 |
| 730.0 | 17790 | 0.408 | 0.374 | 0.374 |
| 731.0 | 21090 | 0.484 | 0.446 | 0.820 |
| 732.0 | 24640 | 0.566 | 0.525 | 1.345 |
| 733.0 | 28490 | 0.654 | 0.610 | 1.955 |
| 734.0 | 32570 | 0.748 | 0.701 | 2.656 |
| 735.0 | 36890 | 0.847 | 0.797 | 3.453 |
| 736.0 | 41450 | 0.952 | 0.899 | 4.352 |
| 737.0 | 46240 | 1.062 | 1.007 | 5.359 |
| | | | | |

Job #: 402138
Project: Nokia Site

Date: September 7, 2020
Revised:
By: ARF

| PROP SWMF-EX NOKIA 012 | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| STAGE/ STORAGE RELATIONSHIP | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 730.0 | 59870 | 1.374 | 0.000 | 0.000 |
| 731.0 | 67790 | 1.556 | 1.465 | 1.465 |
| 732.0 | 83920 | 1.927 | 1.741 | 3.207 |
| 733.0 | 100410 | 2.305 | 2.116 | 5.323 |
| 734.0 | 117220 | 2.691 | 2.498 | 7.821 |
| 735.0 | 134590 | 3.090 | 2.890 | 10.711 |
| 735.9 | 152170 | 3.493 | 2.962 | 13.673 |
| 736.0 | 161140 | 3.699 | 0.360 | 14.033 |
| 736.5 | 170160 | 3.906 | 1.901 | 15.934 |

Job #: 402138
Project: Nokia Site

Date: September 4, 2020
Revised:
By: JMH

| STORMWATER MANAGEMENT FACILITY 010 | | | | |
|---|--------------------|-------------------|---|--|
| EXISTING DANADA WOODS TOWNHOMES | | | | |
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 726.87 | 43020 | 0.988 | 0.000 | 0.000 |
| 727.0 | 43870 | 1.007 | 0.130 | 0.130 |
| 728.0 | 48150 | 1.105 | 1.056 | 1.186 |
| 729.0 | 52590 | 1.207 | 1.156 | 2.342 |
| 730.0 | 57050 | 1.310 | 1.258 | 3.601 |
| 731.0 | 63560 | 1.459 | 1.384 | 4.985 |
| 732.0 | 68900 | 1.582 | 1.520 | 6.506 |
| 733.0 | 75500 | 1.733 | 1.657 | 8.163 |
| 734.0 | 82490 | 1.894 | 1.813 | 9.977 |
| 735.0 | 90470 | 2.077 | 1.985 | 11.962 |
| 736.00 | 101600 | 2.332 | 2.205 | 14.167 |
| 736.39 | 104640 | 2.402 | 0.923 | 15.090 |
| 737.0 | 114910 | 2.638 | 1.537 | 16.627 |

Lucent Technologies

Indian Hill Laboratory
Proposed Parking Lot

Naperville, Illinois

Storm Water Management Plan


March, 1998

Prepared For:

Lucent Technologies
1200 Warrenville Road, Room 1A149
Naperville, Illinois 60563
(630) 979-1337

Prepared By:

Roake and Associates, Inc.
1887 High Grove Lane
Naperville, Illinois 60540
(630) 355-3232



[Handwritten Signature]
Exd. 11/30/99

the drainage areas on the Lucent Technologies site were also modified to reflect current conditions.


The modifications to the STS report included the following:

- The size of Area 1A was increased from 142-acres to 168-acres by removing area from Area 1B and Area 3. The increase reflects modifications to the original STS drainage area to correctly mirror the current drainage pattern of the Lucent Technologies site and provide for the proposed parking lot. Also, the CN for Area 1A was increased from 85.2 to 86.2 due to the increased impervious area.
- The size of Area 3 was decreased from 465-acres to 458-acres due to the proposed parking lot in area 1A.
- Area 1C was created within the previous limits of Area 1B based on the construction of the Danada Woods project. Please see the Danada Woods Townhomes Storm Water Management Plan by Roake and Associates, Inc., dated, February 1997, for more information.
- The size of Area 1B was decreased from 142-acres to 63-acres to reflect the drainage area that was moved to Area 1A and the drainage area that was incorporated into the creation of Area 1C. Additionally, the CN was increased from 85.2 to 88.8 to reflect a higher concentration of impervious area and the time of concentration was decreased from 1.0-hours to 0.7-hours || How

This revised TR-20 watershed model was used to determine the peak runoff and to evaluate if the existing detention basin located in Area 1A contained sufficient storage for the proposed parking lot addition. These values were also compared to the original STS model to determine the effect on the watershed.

It was determined that the existing Lucent Technologies detention basin located in area 1A does contain sufficient existing storage volume to accommodate the proposed parking lot. The original STS storm water model concluded that during the 100-year 24-hour storm event the high water level of this basin was 735.1. Under the proposed conditions the high water level increased to 735.9, which is below the basin's overflow elevation of 736.5. ||


The peak runoff volume for this watershed was also calculated. The original STS storm water model determined that the peak runoff of 195-cfs occurred during the 100-year 1-
7.5" storm ||

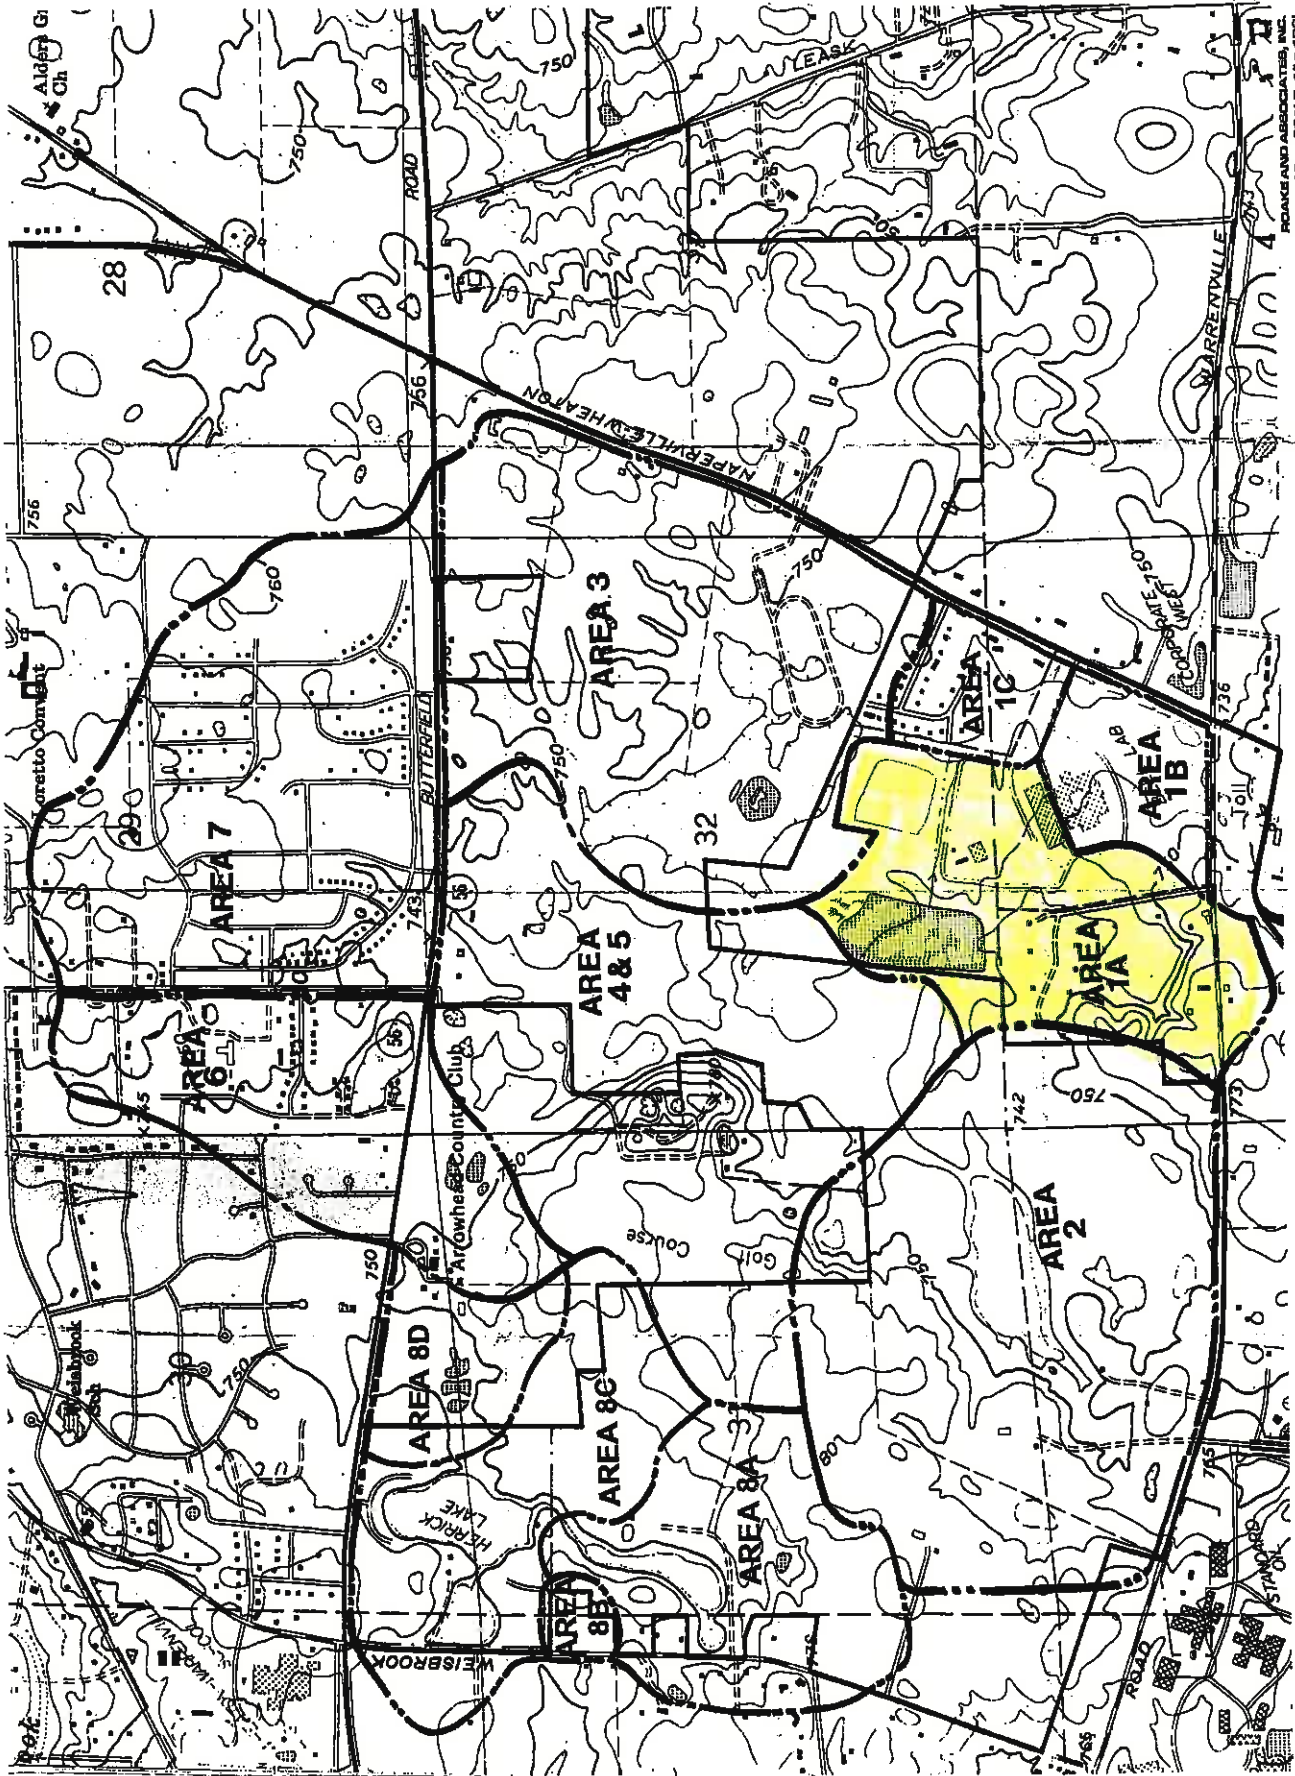

ROANE AND ASSOCIATES, INC.
 SHEET 1 OF 4
 SCALE 1" = 400'

EXHIBIT 2F

“ONSITE” PROPOSED CONDITIONS PONDPACK MODEL & OUTPUT

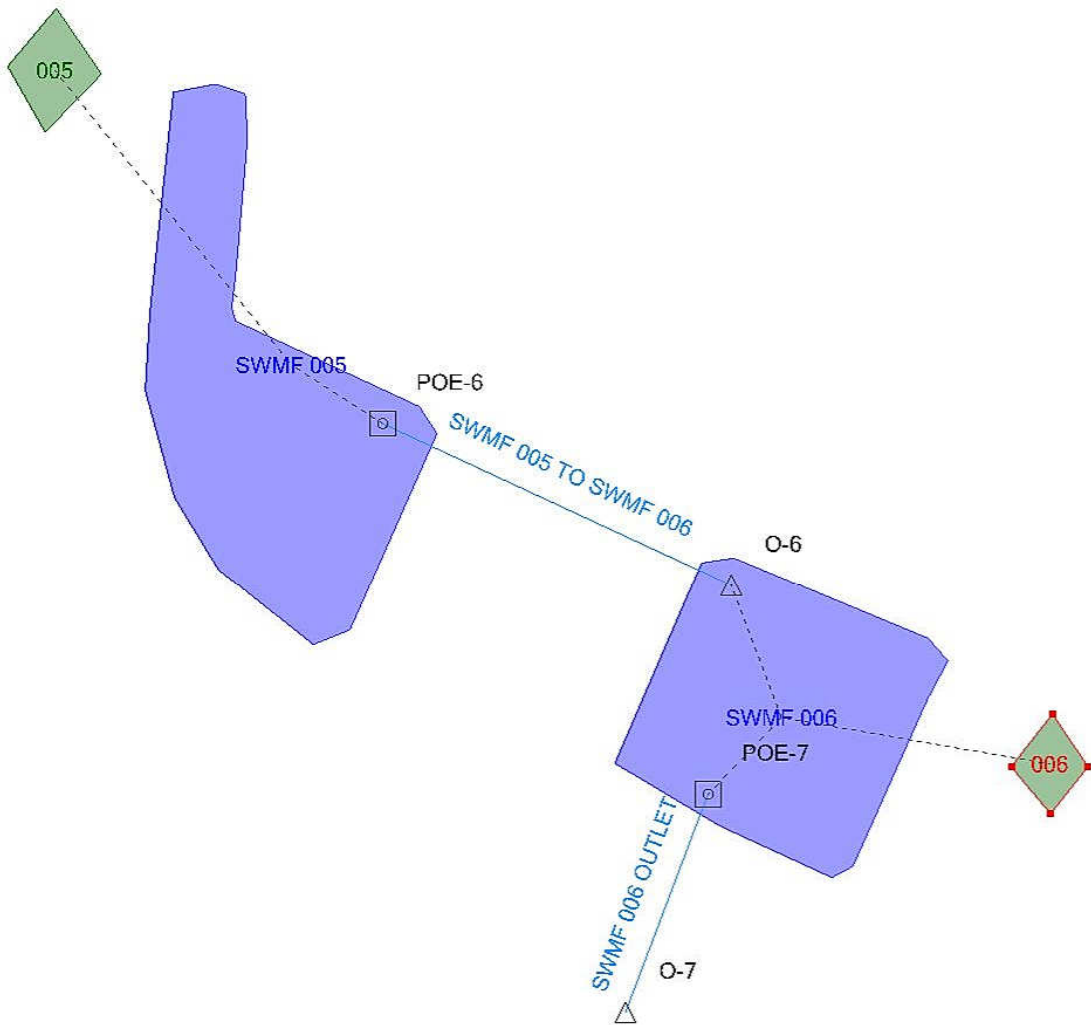

Scenario Calculation Summary

| Scenario Summary | |
|-------------------------------------|------------------------------|
| ID | 1 |
| Label | 100Yr 24Hr |
| Notes | |
| Active Topology | Base Active Topology |
| Hydrology | Base Hydrology |
| Rainfall Runoff | 100Yr 24Hr |
| Physical | Base Physical |
| Initial Condition | Base Initial Condition |
| Boundary Condition | Base Boundary Condition |
| Infiltration and Inflow | Base Infiltration and Inflow |
| Output | Base Output |
| User Data Extensions | Base User Data Extensions |
| PondPack Engine Calculation Options | Base Calculation Options |

| Output Summary | | | |
|------------------|-------------|----------|--------------|
| Output Increment | 0.050 hours | Duration | 24.000 hours |

| Rainfall Summary | | | |
|------------------|--------|---------------|------------------|
| Return Event Tag | 100 | Rainfall Type | Time-Depth Curve |
| Total Depth | 8.6 in | Storm Event | 100YR-24HR |

| ICPM Output Summary | | | |
|---------------------|-------------------------|----------------|-------------|
| Target Convergence | 0.00 ft ³ /s | ICPM Time Step | 0.050 hours |
| Maximum Iterations | 35 | | |

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|----------------|------------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| 005 | 100Yr 24Hr | 100 | None | 2.559 | 16.000 | 3.14 | (N/A) | (N/A) |
| 006 | 100Yr 24Hr | 100 | None | 1.885 | 16.000 | 2.35 | (N/A) | (N/A) |
| O-7 | 100Yr 24Hr | 100 | None | 1.007 | 24.000 | 0.84 | (N/A) | (N/A) |
| SWMF 005 (IN) | 100Yr 24Hr | 100 | None | 2.559 | 16.000 | 3.14 | (N/A) | (N/A) |
| SWMF 005 (OUT) | 100Yr 24Hr | 100 | None | 1.160 | 15.600 | 1.29 | 733.15 | 1.397 |
| SWMF 006 (IN) | 100Yr 24Hr | 100 | None | 3.045 | 15.600 | 3.63 | (N/A) | (N/A) |
| SWMF 006 (OUT) | 100Yr 24Hr | 100 | None | 1.007 | 24.000 | 0.84 | 733.12 | 2.037 |

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|-------|------|----------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
|-------|------|----------|---------------------------|-------------------|--------------------------------|-----------|---------------------|

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|-------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| SWMF 005 TO SWMF 006 | Pond Outlet | Upstream | 2.559 | 16.000 | 3.14 | SWMF 005 | Pond Inflow |
| SWMF 005 TO SWMF 006 | Pond Outlet | Outflow | 1.160 | 15.600 | 1.29 | SWMF 005 | Pond Outflow |
| SWMF 005 TO SWMF 006 | Pond Outlet | Link | 1.160 | 15.600 | 1.29 | | |
| SWMF 005 TO SWMF 006 | Pond Outlet | Downstream | 3.045 | 15.600 | 3.63 | SWMF 006 | |
| SWMF 006 OUTLET | Pond Outlet | Upstream | 3.045 | 15.600 | 3.63 | SWMF 006 | Pond Inflow |
| SWMF 006 OUTLET | Pond Outlet | Outflow | 1.007 | 24.000 | 0.84 | SWMF 006 | Pond Outflow |
| SWMF 006 OUTLET | Pond Outlet | Link | 1.007 | 24.000 | 0.84 | | |
| SWMF 006 OUTLET | Pond Outlet | Downstream | 1.007 | 24.000 | 0.84 | O-7 | |

Messages

| | |
|--------------|---|
| Message Id | 6 |
| Scenario | (N/A) |
| Element Type | (N/A) |
| Element Id | -2 |
| Label | (N/A) |
| Time | (N/A) |
| Message | There are user notifications available. Double-click this message to load these messages. |
| Source | Project File |

Table of Contents

| | | |
|--------------------------------|---------------------------------------|----|
| UPDATED 100YR 12HR-48HR 005 | Time-Depth Curve, 100 years | 1 |
| 006 | Unit Hydrograph Summary, 100 years | 2 |
| SWMF 005 | Unit Hydrograph Summary, 100 years | 4 |
| SWMF 006 | Elevation vs. Volume Curve, 100 years | 6 |
| SWMF 005 TO SWMF 006 | Elevation vs. Volume Curve, 100 years | 7 |
| SWMF 006 OUTLET | Outlet Input Data, 100 years | 8 |
| | Outlet Input Data, 100 years | 10 |

Subsection: Time-Depth Curve
 Label: UPDATED 100YR 12HR-48HR

Return Event: 100 years
 Storm Event: 100YR-24HR

Time-Depth Curve: 100YR-24HR

| | |
|--------------|--------------|
| Label | 100YR-24HR |
| Start Time | 0.000 hours |
| Increment | 1.000 hours |
| End Time | 24.000 hours |
| Return Event | 100 years |

CUMULATIVE RAINFALL (in)
Output Time Increment = 1.000 hours
Time on left represents time for first value in each row.

| Time (hours) | Depth (in) | Depth (in) | Depth (in) | Depth (in) | Depth (in) |
|--------------|------------|------------|------------|------------|------------|
| 0.000 | 0.0 | 0.2 | 0.4 | 0.6 | 0.8 |
| 5.000 | 1.0 | 1.2 | 1.4 | 1.7 | 2.0 |
| 10.000 | 2.3 | 2.7 | 3.1 | 3.8 | 4.5 |
| 15.000 | 5.2 | 6.0 | 6.7 | 7.3 | 7.7 |
| 20.000 | 8.0 | 8.2 | 8.3 | 8.4 | 8.6 |

Subsection: Unit Hydrograph Summary
 Label: 005

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.380 hours |
| Area (User Defined) | 4.230 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.051 hours |
| Time to Peak (Computed) | 16.011 hours |
| Flow (Peak, Computed) | 3.14 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 3.14 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 89.400 |
| Area (User Defined) | 4.230 acres |
| Maximum Retention (Pervious) | 1.2 in |
| Maximum Retention (Pervious, 20 percent) | 0.2 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.3 in |
| Runoff Volume (Pervious) | 2.571 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 2.559 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.380 hours |
| Computational Time Increment | 0.051 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 12.61 ft ³ /s |
| Unit peak time, Tp | 0.253 hours |

Subsection: Unit Hydrograph Summary
Label: 005

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 1.013 hours |
| Total unit time, Tb | 1.267 hours |

Subsection: Unit Hydrograph Summary
 Label: 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.270 hours |
| Area (User Defined) | 3.180 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.036 hours |
| Time to Peak (Computed) | 15.984 hours |
| Flow (Peak, Computed) | 2.35 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 2.35 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 88.100 |
| Area (User Defined) | 3.180 acres |
| Maximum Retention (Pervious) | 1.4 in |
| Maximum Retention (Pervious, 20 percent) | 0.3 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.1 in |
| Runoff Volume (Pervious) | 1.892 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 1.885 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.270 hours |
| Computational Time Increment | 0.036 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 13.34 ft ³ /s |
| Unit peak time, Tp | 0.180 hours |

Subsection: Unit Hydrograph Summary
Label: 006

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 0.720 hours |
| Total unit time, Tb | 0.900 hours |

Subsection: Elevation vs. Volume Curve
Label: SWMF 005

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 729.00 | 0.000 |
| 730.00 | 0.222 |
| 731.00 | 0.506 |
| 732.00 | 0.862 |
| 733.00 | 1.313 |
| 734.00 | 1.890 |
| 735.00 | 2.606 |
| 736.00 | 3.461 |
| 737.00 | 4.460 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 006

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 729.00 | 0.000 |
| 730.00 | 0.374 |
| 731.00 | 0.820 |
| 732.00 | 1.345 |
| 733.00 | 1.955 |
| 734.00 | 2.656 |
| 735.00 | 3.453 |
| 736.00 | 4.352 |
| 737.00 | 5.359 |

Subsection: Outlet Input Data
 Label: SWMF 005 TO SWMF 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 729.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|---------|---------|---------|
| Culvert-Circular | Culvert - 1 | Forward + Reverse | TW | 729.00 | 737.00 |
| Rectangular Weir | Weir - 1 | Forward + Reverse | TW | 736.00 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: SWMF 005 TO SWMF 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 736.00 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|----------------------------------|-------------|
| Structure ID: Culvert - 1 | |
| Structure Type: Culvert-Circular | |
| Number of Barrels | 1 |
| Diameter | 18.0 in |
| Length | 330.00 ft |
| Length (Computed Barrel) | 330.00 ft |
| Slope (Computed) | 0.000 ft/ft |

| | |
|-----------------------|---------|
| Outlet Control Data | |
| Manning's n | 0.013 |
| Ke | 0.200 |
| Kb | 0.018 |
| Kr | 0.000 |
| Convergence Tolerance | 0.00 ft |

| | |
|-------------------------|--------|
| Inlet Control Data | |
| Equation Form | Form 1 |
| K | 0.0045 |
| M | 2.0000 |
| C | 0.0317 |
| Y | 0.6900 |
| T1 ratio (HW/D) | 0.000 |
| T2 ratio (HW/D) | 1.197 |
| Slope Correction Factor | -0.500 |

Use unsubmerged inlet control 0 equation below T1 elevation.
 Use submerged inlet control 0 equation above T2 elevation

In transition zone between unsubmerged and submerged inlet control, interpolate between flows at T1 & T2...

| | | | |
|--------------|-----------|---------|-------------------------|
| T1 Elevation | 729.00 ft | T1 Flow | 7.58 ft ³ /s |
| T2 Elevation | 730.80 ft | T2 Flow | 8.66 ft ³ /s |

Subsection: Outlet Input Data
 Label: SWMF 006 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 729.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|---------|------------|------------|
| Orifice-Circular | Orifice - 1 | Forward | TW | 729.01 | 737.00 |
| Rectangular Weir | Weir - 1 | Forward | TW | 736.00 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: SWMF 006 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 728.50 ft |
| Orifice Diameter | 3.9 in |
| Orifice Coefficient | 0.600 |

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 736.00 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|--------------------------------------|--------------|
| Structure ID: TW | |
| Structure Type: TW Setup, DS Channel | |
| Tailwater Type | Free Outfall |

| | |
|-------------------------------|---------------------------|
| Convergence Tolerances | |
| Maximum Iterations | 30 |
| Tailwater Tolerance (Minimum) | 0.01 ft |
| Tailwater Tolerance (Maximum) | 0.50 ft |
| Headwater Tolerance (Minimum) | 0.01 ft |
| Headwater Tolerance (Maximum) | 0.50 ft |
| Flow Tolerance (Minimum) | 0.001 ft ³ /s |
| Flow Tolerance (Maximum) | 10.000 ft ³ /s |

Index

0

005 (Unit Hydrograph Summary, 100 years)...2, 3

006 (Unit Hydrograph Summary, 100 years)...4, 5

S

SWMF 005 (Elevation vs. Volume Curve, 100 years)...6

SWMF 005 TO SWMF 006 (Outlet Input Data, 100 years)...8, 9

SWMF 006 (Elevation vs. Volume Curve, 100 years)...7


SWMF 006 OUTLET (Outlet Input Data, 100 years)...10, 11

U

UPDATED 100YR 12HR-48HR (Time-Depth Curve, 100 years)...1

EXHIBIT 2G

“PROP” PROPOSED CONDITIONS PONDPACK MODEL & OUTPUT

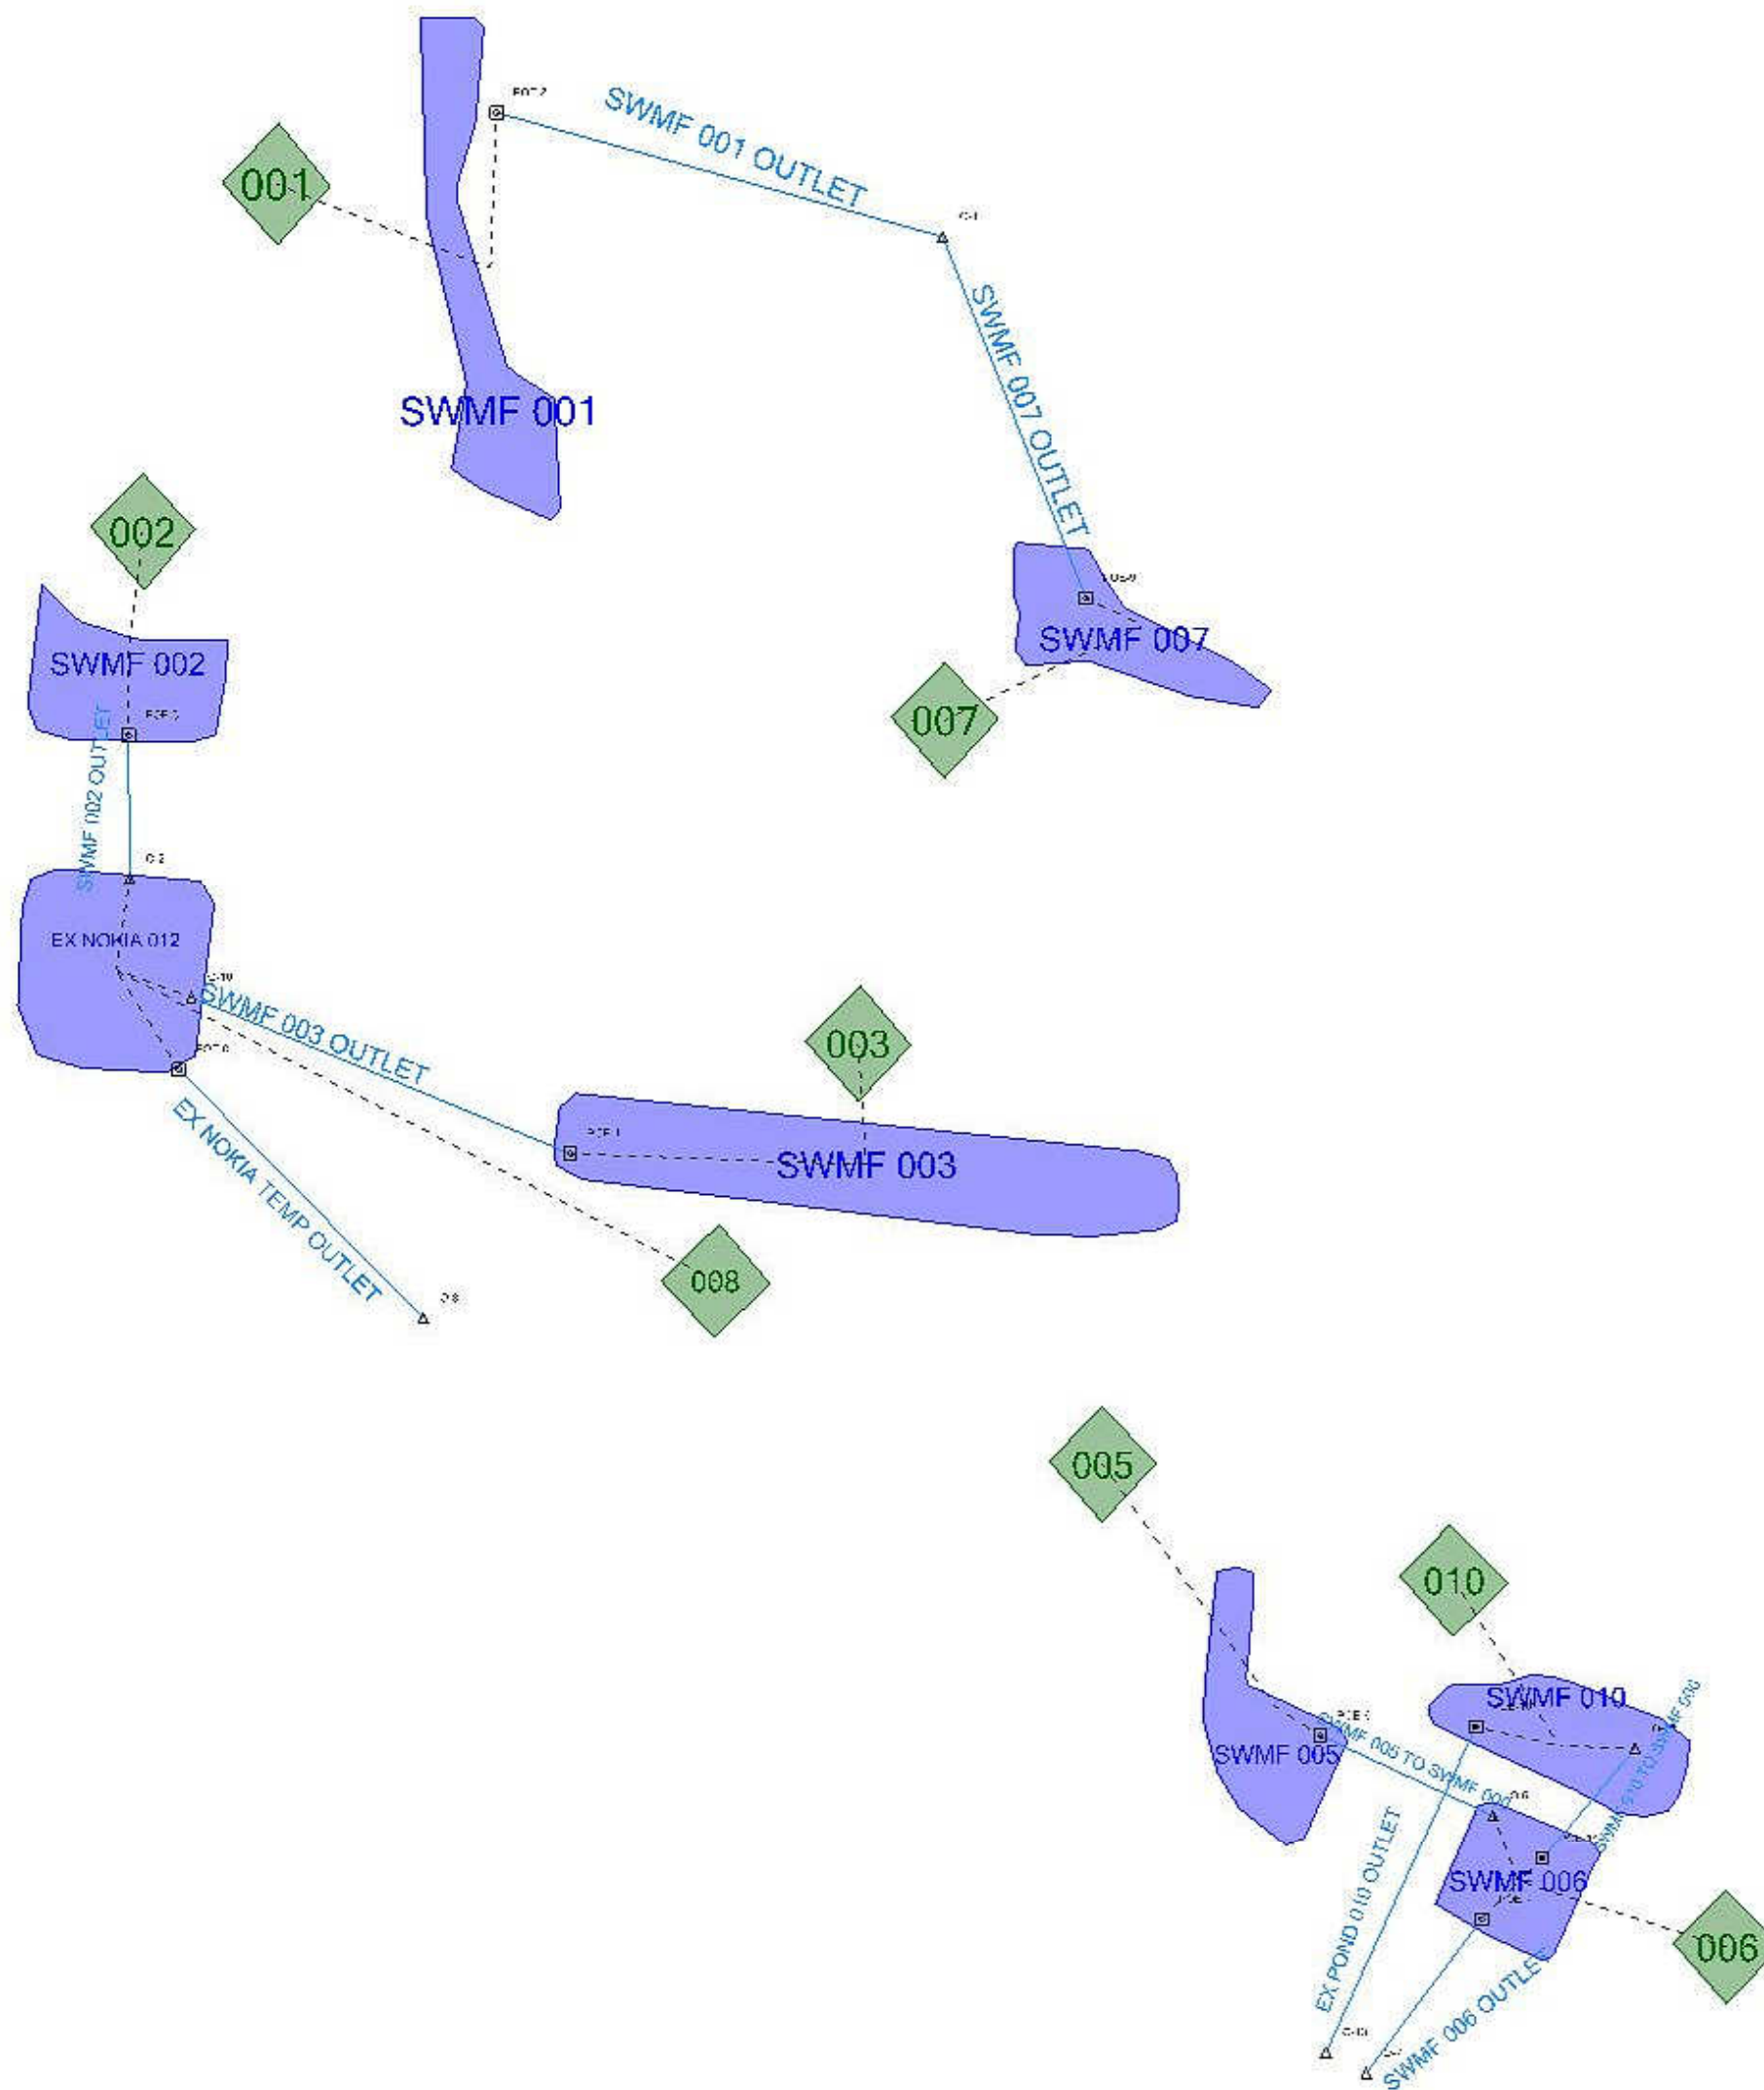

TAB 3

FLOODPLAIN SUBMITTAL

Scenario Calculation Summary

| Scenario Summary | | | |
|-------------------------------------|------------------------------|----------------|------------------|
| ID | 1 | | |
| Label | 100Yr 24Hr | | |
| Notes | | | |
| Active Topology | Base Active Topology | | |
| Hydrology | Base Hydrology | | |
| Rainfall Runoff | 100Yr 24Hr | | |
| Physical | Base Physical | | |
| Initial Condition | Base Initial Condition | | |
| Boundary Condition | Base Boundary Condition | | |
| Infiltration and Inflow | Base Infiltration and Inflow | | |
| Output | Base Output | | |
| User Data Extensions | Base User Data Extensions | | |
| PondPack Engine Calculation Options | Base Calculation Options | | |
| Output Summary | | | |
| Output Increment | 0.050 hours | Duration | 24.000 hours |
| Rainfall Summary | | | |
| Return Event Tag | 100 | Rainfall Type | Time-Depth Curve |
| Total Depth | 8.6 in | Storm Event | 100YR-24HR |
| ICPM Output Summary | | | |
| Target Convergence | 0.00 ft ³ /s | ICPM Time Step | 0.020 hours |
| Maximum Iterations | 35 | | |

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|--------------------|------------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| 001 | 100Yr 24Hr | 100 | None | 1.818 | 16.000 | 2.24 | (N/A) | (N/A) |
| 002 | 100Yr 24Hr | 100 | None | 12.471 | 16.000 | 15.58 | (N/A) | (N/A) |
| 003 | 100Yr 24Hr | 100 | None | 16.883 | 16.000 | 20.83 | (N/A) | (N/A) |
| 005 | 100Yr 24Hr | 100 | None | 2.438 | 16.000 | 3.00 | (N/A) | (N/A) |
| 006 | 100Yr 24Hr | 100 | None | 1.885 | 16.000 | 2.35 | (N/A) | (N/A) |
| 007 | 100Yr 24Hr | 100 | None | 0.670 | 16.000 | 0.82 | (N/A) | (N/A) |
| 008 | 100Yr 24Hr | 100 | None | 0.417 | 16.000 | 0.51 | (N/A) | (N/A) |
| 010 | 100Yr 24Hr | 100 | None | 21.138 | 16.050 | 27.78 | (N/A) | (N/A) |
| EX NOKIA 012 (IN) | 100Yr 24Hr | 100 | None | 17.585 | 17.000 | 16.19 | (N/A) | (N/A) |
| EX NOKIA 012 (OUT) | 100Yr 24Hr | 100 | None | 4.746 | 24.000 | 4.62 | 735.65 | 12.835 |
| O-1 | 100Yr 24Hr | 100 | None | 0.499 | 18.300 | 0.52 | (N/A) | (N/A) |
| O-13 | 100Yr 24Hr | 100 | None | 1.678 | 24.000 | 1.89 | (N/A) | (N/A) |
| O-7 | 100Yr 24Hr | 100 | None | 1.174 | 24.000 | 1.09 | (N/A) | (N/A) |
| O-8 | 100Yr 24Hr | 100 | None | 4.746 | 24.000 | 4.62 | (N/A) | (N/A) |

Scenario Calculation Summary

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|--------------------|------------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| SWMF 001 (IN) | 100Yr 24Hr | 100 | None | 1.818 | 16.000 | 2.24 | (N/A) | (N/A) |
| SWMF 001 (OUT) | 100Yr 24Hr | 100 | None | 0.038 | 24.000 | 0.03 | 739.27 | 1.780 |
| SWMF 002 (IN) | 100Yr 24Hr | 100 | None | 12.471 | 16.000 | 15.58 | (N/A) | (N/A) |
| SWMF 002 (OUT) | 100Yr 24Hr | 100 | None | 10.200 | 17.200 | 10.13 | 736.79 | 3.095 |
| SWMF 003 (IN) | 100Yr 24Hr | 100 | None | 16.883 | 16.000 | 20.83 | (N/A) | (N/A) |
| SWMF 003 (OUT) | 100Yr 24Hr | 100 | None | 6.968 | 18.100 | 5.65 | 737.99 | 10.187 |
| SWMF 005 (IN) | 100Yr 24Hr | 100 | None | 2.438 | 16.000 | 3.00 | (N/A) | (N/A) |
| SWMF 005 (OUT) | 100Yr 24Hr | 100 | None | 0.466 | 13.400 | 1.05 | 736.18 | 3.639 |
| SWMF 005 (Reverse) | 100Yr 24Hr | 100 | None | -1.667 | 14.850 | -4.81 | (N/A) | (N/A) |
| SWMF 006 (IN) | 100Yr 24Hr | 100 | None | 1.345 | 13.850 | 3.13 | (N/A) | (N/A) |
| SWMF 006 (Reverse) | 100Yr 24Hr | 100 | None | -0.661 | 14.850 | -2.49 | (N/A) | (N/A) |
| SWMF 006 (OUT) | 100Yr 24Hr | 100 | None | 0.405 | 23.650 | 1.09 | 736.18 | 4.532 |
| SWMF 006 (Reverse) | 100Yr 24Hr | 100 | None | -4.112 | 14.700 | -23.88 | (N/A) | (N/A) |
| SWMF 007 (IN) | 100Yr 24Hr | 100 | None | 0.670 | 16.000 | 0.82 | (N/A) | (N/A) |
| SWMF 007 (OUT) | 100Yr 24Hr | 100 | None | 0.461 | 18.300 | 0.49 | 739.76 | 0.307 |
| SWMF 010 (IN) | 100Yr 24Hr | 100 | None | 16.224 | 13.950 | 24.25 | (N/A) | (N/A) |
| SWMF 010 (Reverse) | 100Yr 24Hr | 100 | None | 0.000 | 20.900 | -0.32 | (N/A) | (N/A) |
| SWMF 010 (OUT) | 100Yr 24Hr | 100 | None | 1.678 | 24.000 | 1.89 | 736.19 | 14.608 |

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|-------------|----------|---------------------------|-------------------|--------------------------------|--------------|---------------------|
| EX NOKIA TEMP OUTLET | Pond Outlet | Upstream | 17.585 | 17.000 | 16.19 | EX NOKIA 012 | Pond Inflow |

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|---------------|------------|---------------------------|-------------------|--------------------------------|--------------|---------------------|
| EX NOKIA TEMP OUTLET | Pond Outlet | Outflow | 4.746 | 24.000 | 4.62 | EX NOKIA 012 | Pond Outflow |
| EX NOKIA TEMP OUTLET | Pond Outlet | Link | 4.746 | 24.000 | 4.62 | | |
| EX NOKIA TEMP OUTLET | Pond Outlet | Downstream | 4.746 | 24.000 | 4.62 | O-8 | |
| EX POND 010 OUTLET | Pond Outlet | Upstream | 16.224 | 13.950 | 24.25 | SWMF 010 | Pond Inflow |
| EX POND 010 OUTLET | Negative Flow | Upstream | 0.000 | 20.900 | -0.32 | SWMF 010 | Pond Inflow |
| EX POND 010 OUTLET | Pond Outlet | Outflow | 1.678 | 24.000 | 1.89 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Pond Outlet | Link | 1.678 | 24.000 | 1.89 | | |
| EX POND 010 OUTLET | Pond Outlet | Downstream | 1.678 | 24.000 | 1.89 | O-13 | |
| SWMF 001 OUTLET | Pond Outlet | Upstream | 1.818 | 16.000 | 2.24 | SWMF 001 | Pond Inflow |
| SWMF 001 OUTLET | Pond Outlet | Outflow | 0.038 | 24.000 | 0.03 | SWMF 001 | Pond Outflow |
| SWMF 001 OUTLET | Pond Outlet | Link | 0.038 | 24.000 | 0.03 | | |
| SWMF 001 OUTLET | Pond Outlet | Downstream | 0.499 | 18.300 | 0.52 | O-1 | |
| SWMF 002 OUTLET | Pond Outlet | Upstream | 12.471 | 16.000 | 15.58 | SWMF 002 | Pond Inflow |
| SWMF 002 OUTLET | Pond Outlet | Outflow | 10.200 | 17.200 | 10.13 | SWMF 002 | Pond Outflow |
| SWMF 002 OUTLET | Pond Outlet | Link | 10.200 | 17.200 | 10.13 | | |
| SWMF 002 OUTLET | Pond Outlet | Downstream | 17.585 | 17.000 | 16.19 | EX NOKIA 012 | |
| SWMF 003 OUTLET | Pond Outlet | Upstream | 16.883 | 16.000 | 20.83 | SWMF 003 | Pond Inflow |
| SWMF 003 OUTLET | Pond Outlet | Outflow | 6.968 | 18.100 | 5.65 | SWMF 003 | Pond Outflow |
| SWMF 003 OUTLET | Pond Outlet | Link | 6.948 | 18.100 | 5.65 | | |
| SWMF 003 OUTLET | Pond Outlet | Downstream | 17.585 | 17.000 | 16.19 | EX NOKIA 012 | |
| SWMF 005 TO SWMF 006 | Pond Outlet | Upstream | 2.438 | 16.000 | 3.00 | SWMF 005 | Pond Inflow |
| SWMF 005 TO SWMF 006 | Pond Outlet | Outflow | 0.466 | 13.400 | 1.05 | SWMF 005 | Pond Outflow |

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|---------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| SWMF 005 TO SWMF 006 | Negative Flow | Outflow | -1.667 | 14.850 | -4.81 | SWMF 005 | Pond Outflow |
| SWMF 005 TO SWMF 006 | Pond Outlet | Link | 0.466 | 13.400 | 1.05 | | |
| SWMF 005 TO SWMF 006 | Negative Flow | Link | -1.667 | 14.850 | -4.81 | | |
| SWMF 005 TO SWMF 006 | Pond Outlet | Downstream | 1.345 | 13.850 | 3.13 | SWMF 006 | |
| SWMF 005 TO SWMF 006 | Negative Flow | Downstream | -0.661 | 14.850 | -2.49 | SWMF 006 | |
| SWMF 006 OUTLET | Pond Outlet | Upstream | 1.345 | 13.850 | 3.13 | SWMF 006 | Pond Inflow |
| SWMF 006 OUTLET | Negative Flow | Upstream | -0.661 | 14.850 | -2.49 | SWMF 006 | Pond Inflow |
| SWMF 006 OUTLET | Pond Outlet | Outflow | 0.405 | 23.650 | 1.09 | SWMF 006 | Pond Outflow |
| SWMF 006 OUTLET | Negative Flow | Outflow | -4.112 | 14.700 | -23.88 | SWMF 006 | Pond Outflow |
| SWMF 006 OUTLET | Pond Outlet | Link | 1.174 | 24.000 | 1.09 | | |
| SWMF 006 OUTLET | Pond Outlet | Downstream | 1.174 | 24.000 | 1.09 | O-7 | |
| SWMF 007 OUTLET | Pond Outlet | Upstream | 0.670 | 16.000 | 0.82 | SWMF 007 | Pond Inflow |
| SWMF 007 OUTLET | Pond Outlet | Outflow | 0.461 | 18.300 | 0.49 | SWMF 007 | Pond Outflow |
| SWMF 007 OUTLET | Pond Outlet | Link | 0.461 | 18.300 | 0.49 | | |
| SWMF 007 OUTLET | Pond Outlet | Downstream | 0.499 | 18.300 | 0.52 | O-1 | |
| SWMF 010 TO SWMF 006 | Pond Outlet | Upstream | 1.345 | 13.850 | 3.13 | SWMF 006 | Pond Inflow |
| SWMF 010 TO SWMF 006 | Negative Flow | Upstream | -0.661 | 14.850 | -2.49 | SWMF 006 | Pond Inflow |
| SWMF 010 TO SWMF 006 | Pond Outlet | Outflow | 0.405 | 23.650 | 1.09 | SWMF 006 | Pond Outflow |
| SWMF 010 TO SWMF 006 | Negative Flow | Outflow | -4.112 | 14.700 | -23.88 | SWMF 006 | Pond Outflow |
| SWMF 010 TO SWMF 006 | Pond Outlet | Link | 1,296.711 | 24.000 | 2,716.75 | | |

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|---------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| SWMF 010 TO SWMF 006 | Pond Outlet | Downstream | 16.224 | 13.950 | 24.25 | SWMF 010 | |
| SWMF 010 TO SWMF 006 | Negative Flow | Downstream | 0.000 | 20.900 | -0.32 | SWMF 010 | |

Messages

| | |
|--------------|--|
| Message Id | 69 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | The pond has a diversion with both interconnected and level pool outlet structures. It is recommended that you use either all interconnected or all level pool outlet structures with a diversion from a pond. |
| Source | Warning |
| Message Id | 71 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | The pond SWMF 006 has a mixed diversion using both a level pool and interconnected pond route. This configuration may lead to a loop in the system. PondPack does not support loops. Please review your network topology for any possible loops. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|---|
| Message Id | 48 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 39 |
| Label | SWMF 001 |
| Time | (N/A) |
| Message | Outflow hydrograph never crested (last ordinate = max outflow). |
| Source | Warning |
| Message Id | 40 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | Mass balance for routing volumes vary by more than 0.5 %. (2.6 % of Inflow Volume) |
| Source | Warning |
| Message Id | 40 |
| Scenario | 100YR-6HR |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | Mass balance for routing volumes vary by more than 0.5 %. (4.2 % of Inflow Volume) |
| Source | Warning |
| Message Id | 40 |
| Scenario | 100YR-3HR |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | Mass balance for routing volumes vary by more than 0.5 %. (1.4 % of Inflow Volume) |
| Source | Warning |
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 15 |
| Label | 001 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 16.21 ft ³ /s Interp. peak flow= 15.96 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|---|
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 15 |
| Label | 001 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 16.21 ft ³ /s Interp. peak flow= 15.96 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 79 |
| Label | 007 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 5.98 ft ³ /s Interp. peak flow= 5.89 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 79 |
| Label | 007 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 5.98 ft ³ /s Interp. peak flow= 5.89 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 48 |
| Scenario | 2YR-24HR |
| Element Type | Pond |
| Element Id | 39 |
| Label | SWMF 001 |
| Time | (N/A) |
| Message | Outflow hydrograph never crested (last ordinate = max outflow). |
| Source | Warning |
| Message Id | 48 |
| Scenario | 10Yr 24Hr |
| Element Type | Pond |
| Element Id | 39 |
| Label | SWMF 001 |
| Time | (N/A) |
| Message | Outflow hydrograph never crested (last ordinate = max outflow). |
| Source | Warning |

Scenario Calculation Summary

| Scenario Summary | |
|-------------------------------------|------------------------------|
| ID | 116 |
| Label | 2YR-24HR |
| Notes | |
| Active Topology | Base Active Topology |
| Hydrology | Base Hydrology |
| Rainfall Runoff | 2YR-24HR |
| Physical | Base Physical |
| Initial Condition | Base Initial Condition |
| Boundary Condition | Base Boundary Condition |
| Infiltration and Inflow | Base Infiltration and Inflow |
| Output | Base Output |
| User Data Extensions | Base User Data Extensions |
| PondPack Engine Calculation Options | Base Calculation Options |

| Output Summary | | | |
|------------------|-------------|----------|--------------|
| Output Increment | 0.050 hours | Duration | 24.000 hours |

| Rainfall Summary | | | |
|------------------|--------|---------------|------------------|
| Return Event Tag | 2 | Rainfall Type | Time-Depth Curve |
| Total Depth | 3.3 in | Storm Event | 2YR-24HR |

| ICPM Output Summary | | | |
|---------------------|-------------------------|----------------|-------------|
| Target Convergence | 0.00 ft ³ /s | ICPM Time Step | 0.020 hours |
| Maximum Iterations | 35 | | |

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|--------------------|----------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| 001 | 2YR-24HR | 2 | None | 0.556 | 16.000 | 0.77 | (N/A) | (N/A) |
| 002 | 2YR-24HR | 2 | None | 3.695 | 16.050 | 5.24 | (N/A) | (N/A) |
| 003 | 2YR-24HR | 2 | None | 5.144 | 16.050 | 7.16 | (N/A) | (N/A) |
| 005 | 2YR-24HR | 2 | None | 0.749 | 16.050 | 1.04 | (N/A) | (N/A) |
| 006 | 2YR-24HR | 2 | None | 0.562 | 16.000 | 0.79 | (N/A) | (N/A) |
| 007 | 2YR-24HR | 2 | None | 0.205 | 16.000 | 0.29 | (N/A) | (N/A) |
| 008 | 2YR-24HR | 2 | None | 0.130 | 16.000 | 0.18 | (N/A) | (N/A) |
| 010 | 2YR-24HR | 2 | None | 5.537 | 16.100 | 8.39 | (N/A) | (N/A) |
| EX NOKIA 012 (IN) | 2YR-24HR | 2 | None | 7.030 | 17.200 | 9.00 | (N/A) | (N/A) |
| EX NOKIA 012 (OUT) | 2YR-24HR | 2 | None | 2.378 | 24.000 | 3.06 | 732.68 | 4.650 |
| O-1 | 2YR-24HR | 2 | None | 0.136 | 19.050 | 0.18 | (N/A) | (N/A) |
| O-13 | 2YR-24HR | 2 | None | 0.502 | 24.000 | 0.93 | (N/A) | (N/A) |
| O-7 | 2YR-24HR | 2 | None | 0.521 | 20.550 | 0.51 | (N/A) | (N/A) |
| O-8 | 2YR-24HR | 2 | None | 2.378 | 24.000 | 3.06 | (N/A) | (N/A) |

Scenario Calculation Summary

Executive Summary (Nodes)

| Label | Scenario | Return Event (years) | Truncation | Hydrograph Volume (ac-ft) | Time to Peak (hours) | Peak Flow (ft ³ /s) | Maximum Water Surface Elevation (ft) | Maximum Pond Storage (ac-ft) |
|----------------|----------|----------------------|------------|---------------------------|----------------------|--------------------------------|--------------------------------------|------------------------------|
| SWMF 001 (IN) | 2YR-24HR | 2 | None | 0.556 | 16.000 | 0.77 | (N/A) | (N/A) |
| SWMF 001 (OUT) | 2YR-24HR | 2 | None | 0.019 | 24.000 | 0.02 | 738.16 | 0.538 |
| SWMF 002 (IN) | 2YR-24HR | 2 | None | 3.695 | 16.050 | 5.24 | (N/A) | (N/A) |
| SWMF 002 (OUT) | 2YR-24HR | 2 | None | 3.349 | 17.100 | 5.00 | 733.10 | 0.504 |
| SWMF 003 (IN) | 2YR-24HR | 2 | None | 5.144 | 16.000 | 7.16 | (N/A) | (N/A) |
| SWMF 003 (OUT) | 2YR-24HR | 2 | None | 3.551 | 18.500 | 4.02 | 733.87 | 2.172 |
| SWMF 005 (IN) | 2YR-24HR | 2 | None | 0.749 | 16.050 | 1.04 | (N/A) | (N/A) |
| SWMF 005 (OUT) | 2YR-24HR | 2 | None | 0.449 | 14.500 | 0.67 | 730.33 | 0.315 |
| SWMF 006 (IN) | 2YR-24HR | 2 | None | 1.012 | 14.550 | 1.42 | (N/A) | (N/A) |
| SWMF 006 (OUT) | 2YR-24HR | 2 | None | 0.521 | 20.600 | 0.51 | 730.31 | 0.512 |
| SWMF 007 (IN) | 2YR-24HR | 2 | None | 0.205 | 16.000 | 0.29 | (N/A) | (N/A) |
| SWMF 007 (OUT) | 2YR-24HR | 2 | None | 0.117 | 19.050 | 0.16 | 739.30 | 0.113 |
| SWMF 010 (IN) | 2YR-24HR | 2 | None | 5.537 | 16.100 | 8.39 | (N/A) | (N/A) |
| SWMF 010 (OUT) | 2YR-24HR | 2 | None | 0.502 | 24.000 | 0.93 | 731.03 | 5.034 |

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|-------------|------------|---------------------------|-------------------|--------------------------------|--------------|---------------------|
| EX NOKIA TEMP OUTLET | Pond Outlet | Upstream | 7.030 | 17.200 | 9.00 | EX NOKIA 012 | Pond Inflow |
| EX NOKIA TEMP OUTLET | Pond Outlet | Outflow | 2.378 | 24.000 | 3.06 | EX NOKIA 012 | Pond Outflow |
| EX NOKIA TEMP OUTLET | Pond Outlet | Link | 2.378 | 24.000 | 3.06 | | |
| EX NOKIA TEMP OUTLET | Pond Outlet | Downstream | 2.378 | 24.000 | 3.06 | O-8 | |

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|-------------|------------|---------------------------|-------------------|--------------------------------|--------------|---------------------|
| EX POND 010 OUTLET | Pond Outlet | Upstream | 5.537 | 16.100 | 8.39 | SWMF 010 | Pond Inflow |
| EX POND 010 OUTLET | Pond Outlet | Outflow | 0.502 | 24.000 | 0.93 | SWMF 010 | Pond Outflow |
| EX POND 010 OUTLET | Pond Outlet | Link | 0.502 | 24.000 | 0.93 | | |
| EX POND 010 OUTLET | Pond Outlet | Downstream | 0.502 | 24.000 | 0.93 | O-13 | |
| SWMF 001 OUTLET | Pond Outlet | Upstream | 0.556 | 16.000 | 0.77 | SWMF 001 | Pond Inflow |
| SWMF 001 OUTLET | Pond Outlet | Outflow | 0.019 | 24.000 | 0.02 | SWMF 001 | Pond Outflow |
| SWMF 001 OUTLET | Pond Outlet | Link | 0.019 | 24.000 | 0.02 | | |
| SWMF 001 OUTLET | Pond Outlet | Downstream | 0.136 | 19.050 | 0.18 | O-1 | |
| SWMF 002 OUTLET | Pond Outlet | Upstream | 3.695 | 16.050 | 5.24 | SWMF 002 | Pond Inflow |
| SWMF 002 OUTLET | Pond Outlet | Outflow | 3.349 | 17.100 | 5.00 | SWMF 002 | Pond Outflow |
| SWMF 002 OUTLET | Pond Outlet | Link | 3.349 | 17.100 | 5.00 | | |
| SWMF 002 OUTLET | Pond Outlet | Downstream | 7.030 | 17.200 | 9.00 | EX NOKIA 012 | |
| SWMF 003 OUTLET | Pond Outlet | Upstream | 5.144 | 16.000 | 7.16 | SWMF 003 | Pond Inflow |
| SWMF 003 OUTLET | Pond Outlet | Outflow | 3.551 | 18.500 | 4.02 | SWMF 003 | Pond Outflow |
| SWMF 003 OUTLET | Pond Outlet | Link | 3.551 | 18.500 | 4.02 | | |
| SWMF 003 OUTLET | Pond Outlet | Downstream | 7.030 | 17.200 | 9.00 | EX NOKIA 012 | |
| SWMF 005 TO SWMF 006 | Pond Outlet | Upstream | 0.749 | 16.050 | 1.04 | SWMF 005 | Pond Inflow |
| SWMF 005 TO SWMF 006 | Pond Outlet | Outflow | 0.449 | 14.500 | 0.67 | SWMF 005 | Pond Outflow |
| SWMF 005 TO SWMF 006 | Pond Outlet | Link | 0.449 | 14.500 | 0.67 | | |
| SWMF 005 TO SWMF 006 | Pond Outlet | Downstream | 1.012 | 14.550 | 1.42 | SWMF 006 | |
| SWMF 006 OUTLET | Pond Outlet | Upstream | 1.012 | 14.550 | 1.42 | SWMF 006 | Pond Inflow |
| SWMF 006 OUTLET | Pond Outlet | Outflow | 0.521 | 20.600 | 0.51 | SWMF 006 | Pond Outflow |

Scenario Calculation Summary

Executive Summary (Links)

| Label | Type | Location | Hydrograph Volume (ac-ft) | Peak Time (hours) | Peak Flow (ft ³ /s) | End Point | Node Flow Direction |
|----------------------|-------------|------------|---------------------------|-------------------|--------------------------------|-----------|---------------------|
| SWMF 006 OUTLET | Pond Outlet | Link | 0.521 | 20.550 | 0.51 | | |
| SWMF 006 OUTLET | Pond Outlet | Downstream | 0.521 | 20.550 | 0.51 | O-7 | |
| SWMF 007 OUTLET | Pond Outlet | Upstream | 0.205 | 16.000 | 0.29 | SWMF 007 | Pond Inflow |
| SWMF 007 OUTLET | Pond Outlet | Outflow | 0.117 | 19.050 | 0.16 | SWMF 007 | Pond Outflow |
| SWMF 007 OUTLET | Pond Outlet | Link | 0.117 | 19.050 | 0.16 | | |
| SWMF 007 OUTLET | Pond Outlet | Downstream | 0.136 | 19.050 | 0.18 | O-1 | |
| SWMF 010 TO SWMF 006 | Pond Outlet | Upstream | 1.012 | 14.550 | 1.42 | SWMF 006 | Pond Inflow |
| SWMF 010 TO SWMF 006 | Pond Outlet | Outflow | 0.521 | 20.600 | 0.51 | SWMF 006 | Pond Outflow |
| SWMF 010 TO SWMF 006 | Pond Outlet | Link | 0.000 | 0.000 | 0.00 | | |
| SWMF 010 TO SWMF 006 | Pond Outlet | Downstream | 5.537 | 16.100 | 8.39 | SWMF 010 | |

Messages

| | |
|--------------|--|
| Message Id | 69 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | The pond has a diversion with both interconnected and level pool outlet structures. It is recommended that you use either all interconnected or all level pool outlet structures with a diversion from a pond. |
| Source | Warning |
| Message Id | 71 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | The pond SWMF 006 has a mixed diversion using both a level pool and interconnected pond route. This configuration may lead to a loop in the system. PondPack does not support loops. Please review your network topology for any possible loops. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |
| Message Id | 67 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 67 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 87 |
| Label | EX NOKIA TEMP OUTLET |
| Time | (N/A) |
| Message | Flow direction set to reverse for one ore more structures in composite outlet structure EX NOKIA TEMP OUTLET. To eliminate this warning, edit outlet data and select forward only. If reverse flow analysis is required, then the tailwater conditions must be set to interconnected pond. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 101 |
| Label | EX POND 010 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 63 |
| Label | SWMF 002 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 64 |
| Label | SWMF 003 OUTLET |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 15 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Kr (reverse flow entrance loss coefficient) was not specified. Kr was set to same value as Ke= 0.200 . |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 66 |
| Label | SWMF 005 TO SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100Yr 24Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 100YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-18HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-12HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-6HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-3HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-2HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 2YR-1HR |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 18Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 12Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 6Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 3Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 2Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|--|
| Message Id | 39 |
| Scenario | 10Yr 1Hr |
| Element Type | Composite Outlet Structure |
| Element Id | 105 |
| Label | SWMF 010 to SWMF 006 |
| Time | (N/A) |
| Message | Reverse flow conditions encountered for one or more headwater elevations. Calculated reverse flows may be approximate. |
| Source | Warning |
| Message Id | 48 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 39 |
| Label | SWMF 001 |
| Time | (N/A) |
| Message | Outflow hydrograph never crested (last ordinate = max outflow). |
| Source | Warning |
| Message Id | 40 |
| Scenario | 100Yr 24Hr |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | Mass balance for routing volumes vary by more than 0.5 %. (2.6 % of Inflow Volume) |
| Source | Warning |
| Message Id | 40 |
| Scenario | 100YR-6HR |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | Mass balance for routing volumes vary by more than 0.5 %. (4.2 % of Inflow Volume) |
| Source | Warning |
| Message Id | 40 |
| Scenario | 100YR-3HR |
| Element Type | Pond |
| Element Id | 44 |
| Label | SWMF 006 |
| Time | (N/A) |
| Message | Mass balance for routing volumes vary by more than 0.5 %. (1.4 % of Inflow Volume) |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|---|
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 15 |
| Label | 001 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 16.21 ft ³ /s Interp. peak flow= 15.96 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 15 |
| Label | 001 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 16.21 ft ³ /s Interp. peak flow= 15.96 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 79 |
| Label | 007 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 5.98 ft ³ /s Interp. peak flow= 5.89 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 7 |
| Scenario | 100YR-1HR |
| Element Type | Catchment |
| Element Id | 79 |
| Label | 007 |
| Time | (N/A) |
| Message | The difference between calculated peak flow and interpolated peak flow 1.5 % is greater than 1.5 %. Computed peak flow= 5.98 ft ³ /s Interp. peak flow= 5.89 ft ³ /s. Output increment for this catchment may be too large. |
| Source | Warning |
| Message Id | 48 |
| Scenario | 2YR-24HR |
| Element Type | Pond |
| Element Id | 39 |
| Label | SWMF 001 |
| Time | (N/A) |
| Message | Outflow hydrograph never crested (last ordinate = max outflow). |
| Source | Warning |

Scenario Calculation Summary

Messages

| | |
|--------------|---|
| Message Id | 48 |
| Scenario | 10Yr 24Hr |
| Element Type | Pond |
| Element Id | 39 |
| Label | SWMF 001 |
| Time | (N/A) |
| Message | Outflow hydrograph never crested (last ordinate = max outflow). |
| Source | Warning |

Table of Contents

| | | |
|--------------------------------|---------------------------------------|----|
| UPDATED 100YR 12HR-48HR 001 | Time-Depth Curve, 100 years | 1 |
| 002 | Unit Hydrograph Summary, 100 years | 2 |
| 003 | Unit Hydrograph Summary, 100 years | 4 |
| 005 | Unit Hydrograph Summary, 100 years | 6 |
| 006 | Unit Hydrograph Summary, 100 years | 8 |
| 007 | Unit Hydrograph Summary, 100 years | 10 |
| 008 | Unit Hydrograph Summary, 100 years | 12 |
| 010 | Unit Hydrograph Summary, 100 years | 14 |
| EX NOKIA 012 | Unit Hydrograph Summary, 100 years | 16 |
| SWMF 001 | Elevation vs. Volume Curve, 100 years | 18 |
| SWMF 002 | Elevation vs. Volume Curve, 100 years | 19 |
| SWMF 003 | Elevation vs. Volume Curve, 100 years | 20 |
| SWMF 005 | Elevation vs. Volume Curve, 100 years | 21 |
| SWMF 006 | Elevation vs. Volume Curve, 100 years | 22 |
| SWMF 007 | Elevation vs. Volume Curve, 100 years | 23 |
| SWMF 010 | Elevation vs. Volume Curve, 100 years | 24 |
| EX NOKIA TEMP OUTLET | Elevation vs. Volume Curve, 100 years | 25 |

Table of Contents

| | | |
|----------------------|------------------------------|----|
| | Outlet Input Data, 100 years | 26 |
| EX POND 010 OUTLET | | |
| | Outlet Input Data, 100 years | 28 |
| SWMF 001 OUTLET | | |
| | Outlet Input Data, 100 years | 30 |
| SWMF 002 OUTLET | | |
| | Outlet Input Data, 100 years | 32 |
| SWMF 003 OUTLET | | |
| | Outlet Input Data, 100 years | 34 |
| SWMF 005 TO SWMF 006 | | |
| | Outlet Input Data, 100 years | 36 |
| SWMF 006 OUTLET | | |
| | Outlet Input Data, 100 years | 38 |
| SWMF 007 OUTLET | | |
| | Outlet Input Data, 100 years | 40 |
| SWMF 010 to SWMF 006 | | |
| | Outlet Input Data, 100 years | 42 |

Subsection: Time-Depth Curve
 Label: UPDATED 100YR 12HR-48HR

Return Event: 100 years
 Storm Event: 100YR-24HR

Time-Depth Curve: 100YR-24HR

| | |
|--------------|--------------|
| Label | 100YR-24HR |
| Start Time | 0.000 hours |
| Increment | 1.000 hours |
| End Time | 24.000 hours |
| Return Event | 100 years |

CUMULATIVE RAINFALL (in)
Output Time Increment = 1.000 hours
Time on left represents time for first value in each row.

| Time (hours) | Depth (in) | Depth (in) | Depth (in) | Depth (in) | Depth (in) |
|--------------|------------|------------|------------|------------|------------|
| 0.000 | 0.0 | 0.2 | 0.4 | 0.6 | 0.8 |
| 5.000 | 1.0 | 1.2 | 1.4 | 1.7 | 2.0 |
| 10.000 | 2.3 | 2.7 | 3.1 | 3.8 | 4.5 |
| 15.000 | 5.2 | 6.0 | 6.7 | 7.3 | 7.7 |
| 20.000 | 8.0 | 8.2 | 8.3 | 8.4 | 8.6 |

Subsection: Unit Hydrograph Summary
 Label: 001

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.250 hours |
| Area (User Defined) | 3.010 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.033 hours |
| Time to Peak (Computed) | 16.000 hours |
| Flow (Peak, Computed) | 2.24 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 2.24 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 89.200 |
| Area (User Defined) | 3.010 acres |
| Maximum Retention (Pervious) | 1.2 in |
| Maximum Retention (Pervious, 20 percent) | 0.2 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.3 in |
| Runoff Volume (Pervious) | 1.824 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 1.818 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.250 hours |
| Computational Time Increment | 0.033 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 13.64 ft ³ /s |
| Unit peak time, Tp | 0.167 hours |

Subsection: Unit Hydrograph Summary
Label: 001

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 0.667 hours |
| Total unit time, Tb | 0.833 hours |

Subsection: Unit Hydrograph Summary
 Label: 002

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.340 hours |
| Area (User Defined) | 21.170 acres |

| | |
|--|--------------------------|
| Computational Time Increment | 0.045 hours |
| Time to Peak (Computed) | 16.003 hours |
| Flow (Peak, Computed) | 15.58 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 15.58 ft ³ /s |

| | |
|---|--------------|
| Drainage Area | |
| SCS CN (Composite) | 87.800 |
| Area (User Defined) | 21.170 acres |
| Maximum Retention (Pervious) | 1.4 in |
| Maximum Retention (Pervious, 20 percent) | 0.3 in |

| | |
|---------------------------------------|--------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.1 in |
| Runoff Volume (Pervious) | 12.529 ac-ft |

| | |
|---|--------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 12.471 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.340 hours |
| Computational Time Increment | 0.045 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 70.55 ft ³ /s |
| Unit peak time, Tp | 0.227 hours |

Subsection: Unit Hydrograph Summary
Label: 002

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 0.907 hours |
| Total unit time, Tb | 1.133 hours |

Subsection: Unit Hydrograph Summary
 Label: 003

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.330 hours |
| Area (User Defined) | 28.080 acres |

| | |
|--|--------------------------|
| Computational Time Increment | 0.044 hours |
| Time to Peak (Computed) | 15.972 hours |
| Flow (Peak, Computed) | 20.83 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 20.83 ft ³ /s |

| | |
|---|--------------|
| Drainage Area | |
| SCS CN (Composite) | 89.000 |
| Area (User Defined) | 28.080 acres |
| Maximum Retention (Pervious) | 1.2 in |
| Maximum Retention (Pervious, 20 percent) | 0.2 in |

| | |
|---------------------------------------|--------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.2 in |
| Runoff Volume (Pervious) | 16.957 ac-ft |

| | |
|---|--------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 16.883 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.330 hours |
| Computational Time Increment | 0.044 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 96.41 ft ³ /s |
| Unit peak time, Tp | 0.220 hours |

Subsection: Unit Hydrograph Summary
Label: 003

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 0.880 hours |
| Total unit time, Tb | 1.100 hours |

Subsection: Unit Hydrograph Summary
 Label: 005

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.380 hours |
| Area (User Defined) | 4.030 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.051 hours |
| Time to Peak (Computed) | 16.011 hours |
| Flow (Peak, Computed) | 3.00 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 3.00 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 89.400 |
| Area (User Defined) | 4.030 acres |
| Maximum Retention (Pervious) | 1.2 in |
| Maximum Retention (Pervious, 20 percent) | 0.2 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.3 in |
| Runoff Volume (Pervious) | 2.450 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 2.438 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.380 hours |
| Computational Time Increment | 0.051 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 12.02 ft ³ /s |
| Unit peak time, Tp | 0.253 hours |

Subsection: Unit Hydrograph Summary
Label: 005

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 1.013 hours |
| Total unit time, Tb | 1.267 hours |

Subsection: Unit Hydrograph Summary
 Label: 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.270 hours |
| Area (User Defined) | 3.180 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.036 hours |
| Time to Peak (Computed) | 15.984 hours |
| Flow (Peak, Computed) | 2.35 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 2.35 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 88.100 |
| Area (User Defined) | 3.180 acres |
| Maximum Retention (Pervious) | 1.4 in |
| Maximum Retention (Pervious, 20 percent) | 0.3 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.1 in |
| Runoff Volume (Pervious) | 1.892 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 1.885 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.270 hours |
| Computational Time Increment | 0.036 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 13.34 ft ³ /s |
| Unit peak time, Tp | 0.180 hours |

Subsection: Unit Hydrograph Summary
Label: 006

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 0.720 hours |
| Total unit time, Tb | 0.900 hours |

Subsection: Unit Hydrograph Summary
 Label: 007

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.250 hours |
| Area (User Defined) | 1.110 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.033 hours |
| Time to Peak (Computed) | 16.000 hours |
| Flow (Peak, Computed) | 0.82 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 0.82 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 89.200 |
| Area (User Defined) | 1.110 acres |
| Maximum Retention (Pervious) | 1.2 in |
| Maximum Retention (Pervious, 20 percent) | 0.2 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.3 in |
| Runoff Volume (Pervious) | 0.673 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 0.670 ac-ft |

| | |
|--------------------------------------|-------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.250 hours |
| Computational Time Increment | 0.033 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 5.03 ft ³ /s |
| Unit peak time, Tp | 0.167 hours |

Subsection: Unit Hydrograph Summary
Label: 007

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 0.667 hours |
| Total unit time, Tb | 0.833 hours |

Subsection: Unit Hydrograph Summary
 Label: 008

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.083 hours |
| Area (User Defined) | 0.680 acres |

| | |
|--|-------------------------|
| Computational Time Increment | 0.011 hours |
| Time to Peak (Computed) | 16.000 hours |
| Flow (Peak, Computed) | 0.51 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.000 hours |
| Flow (Peak Interpolated Output) | 0.51 ft ³ /s |

| | |
|---|-------------|
| Drainage Area | |
| SCS CN (Composite) | 90.000 |
| Area (User Defined) | 0.680 acres |
| Maximum Retention (Pervious) | 1.1 in |
| Maximum Retention (Pervious, 20 percent) | 0.2 in |

| | |
|---------------------------------------|-------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 7.4 in |
| Runoff Volume (Pervious) | 0.417 ac-ft |

| | |
|---|-------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 0.417 ac-ft |

| | |
|--------------------------------------|-------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.083 hours |
| Computational Time Increment | 0.011 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 9.25 ft ³ /s |
| Unit peak time, Tp | 0.056 hours |

Subsection: Unit Hydrograph Summary
Label: 008

Return Event: 100 years
Storm Event: 100YR-24HR

SCS Unit Hydrograph Parameters

| | |
|------------------------|-------------|
| Unit receding limb, Tr | 0.222 hours |
| Total unit time, Tb | 0.278 hours |

Subsection: Unit Hydrograph Summary
 Label: 010

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|--------------------------------------|--------------|
| Storm Event | 100YR-24HR |
| Return Event | 100 years |
| Duration | 24.000 hours |
| Depth | 8.6 in |
| Time of Concentration (Composite) | 0.470 hours |
| Area (User Defined) | 39.370 acres |

| | |
|--|--------------------------|
| Computational Time Increment | 0.063 hours |
| Time to Peak (Computed) | 16.043 hours |
| Flow (Peak, Computed) | 27.78 ft ³ /s |
| Output Increment | 0.050 hours |
| Time to Flow (Peak Interpolated Output) | 16.050 hours |
| Flow (Peak Interpolated Output) | 27.78 ft ³ /s |

| | |
|---|--------------|
| Drainage Area | |
| SCS CN (Composite) | 82.700 |
| Area (User Defined) | 39.370 acres |
| Maximum Retention (Pervious) | 2.1 in |
| Maximum Retention (Pervious, 20 percent) | 0.4 in |

| | |
|---------------------------------------|--------------|
| Cumulative Runoff | |
| Cumulative Runoff Depth (Pervious) | 6.5 in |
| Runoff Volume (Pervious) | 21.283 ac-ft |

| | |
|---|--------------|
| Hydrograph Volume (Area under Hydrograph curve) | |
| Volume | 21.138 ac-ft |

| | |
|--------------------------------------|--------------------------|
| SCS Unit Hydrograph Parameters | |
| Time of Concentration (Composite) | 0.470 hours |
| Computational Time Increment | 0.063 hours |
| Unit Hydrograph Shape Factor | 483.432 |
| K Factor | 0.749 |
| Receding/Rising, Tr/Tp | 1.670 |
| Unit peak, qp | 94.91 ft ³ /s |
| Unit peak time, Tp | 0.313 hours |

Subsection: Unit Hydrograph Summary
Label: 010

Return Event: 100 years
Storm Event: 100YR-24HR

| SCS Unit Hydrograph Parameters | |
|--------------------------------|-------------|
| Unit receding limb, Tr | 1.253 hours |
| Total unit time, Tb | 1.567 hours |

Subsection: Elevation vs. Volume Curve
Label: EX NOKIA 012

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 730.00 | 0.000 |
| 731.00 | 1.465 |
| 732.00 | 3.207 |
| 733.00 | 5.323 |
| 734.00 | 7.821 |
| 735.00 | 10.711 |
| 735.90 | 13.673 |
| 736.00 | 14.033 |
| 736.50 | 15.934 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 001

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 737.50 | 0.000 |
| 738.00 | 0.374 |
| 739.00 | 1.407 |
| 739.50 | 2.086 |
| 740.00 | 2.851 |
| 741.00 | 4.517 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 002

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 732.00 | 0.000 |
| 733.00 | 0.451 |
| 734.00 | 0.996 |
| 735.00 | 1.642 |
| 736.00 | 2.400 |
| 737.00 | 3.279 |
| 738.00 | 4.287 |
| 739.00 | 5.429 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 003

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 732.00 | 0.000 |
| 733.00 | 1.046 |
| 734.00 | 2.347 |
| 735.00 | 3.907 |
| 736.00 | 5.733 |
| 737.00 | 7.832 |
| 738.00 | 10.210 |
| 739.00 | 12.872 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 005

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 729.00 | 0.000 |
| 730.00 | 0.222 |
| 731.00 | 0.506 |
| 732.00 | 0.862 |
| 733.00 | 1.313 |
| 734.00 | 1.890 |
| 735.00 | 2.606 |
| 736.00 | 3.461 |
| 737.00 | 4.460 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 006

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 729.00 | 0.000 |
| 730.00 | 0.374 |
| 731.00 | 0.820 |
| 732.00 | 1.345 |
| 733.00 | 1.955 |
| 734.00 | 2.656 |
| 735.00 | 3.453 |
| 736.00 | 4.352 |
| 737.00 | 5.359 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 007

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 739.00 | 0.000 |
| 739.50 | 0.192 |
| 740.00 | 0.411 |
| 741.00 | 0.917 |

Subsection: Elevation vs. Volume Curve
Label: SWMF 010

Return Event: 100 years
Storm Event: 100YR-24HR

Elevation-Volume

| Pond Elevation (ft) | Pond Volume (ac-ft) |
|------------------------|------------------------|
| 726.87 | 0.000 |
| 727.00 | 0.130 |
| 728.00 | 1.186 |
| 729.00 | 2.342 |
| 730.00 | 3.601 |
| 731.00 | 4.985 |
| 732.00 | 6.506 |
| 733.00 | 8.163 |
| 734.00 | 9.977 |
| 735.00 | 11.962 |
| 736.00 | 14.167 |
| 736.39 | 15.090 |
| 737.00 | 16.627 |

Subsection: Outlet Input Data
 Label: EX NOKIA TEMP OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 730.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 736.50 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|---------|------------|------------|
| Orifice-Circular | Orifice - 1 | Forward | TW | 730.00 | 736.50 |
| Rectangular Weir | Weir - 1 | Forward | TW | 735.90 | 736.50 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: EX NOKIA TEMP OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 730.00 ft |
| Orifice Diameter | 8.8 in |
| Orifice Coefficient | 0.600 |

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 735.90 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|--------------------------------------|--------------|
| Structure ID: TW | |
| Structure Type: TW Setup, DS Channel | |
| Tailwater Type | Free Outfall |

| | |
|-------------------------------|---------------------------|
| Convergence Tolerances | |
| Maximum Iterations | 30 |
| Tailwater Tolerance (Minimum) | 0.01 ft |
| Tailwater Tolerance (Maximum) | 0.50 ft |
| Headwater Tolerance (Minimum) | 0.01 ft |
| Headwater Tolerance (Maximum) | 0.50 ft |
| Flow Tolerance (Minimum) | 0.001 ft ³ /s |
| Flow Tolerance (Maximum) | 10.000 ft ³ /s |

Subsection: Outlet Input Data
 Label: EX POND 010 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 726.87 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward + Reverse | TW | 726.88 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
Label: EX POND 010 OUTLET

Return Event: 100 years
Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| <hr/> | |
| Number of Openings | 1 |
| Elevation | 726.67 ft |
| Orifice Diameter | 5.3 in |
| Orifice Coefficient | 0.600 |

Subsection: Outlet Input Data
 Label: SWMF 001 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 737.50 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 741.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward | TW | 737.50 | 741.00 |
| Rectangular Weir | Weir - 1 | Forward | TW | 740.00 | 741.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: SWMF 001 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 737.50 ft |
| Orifice Diameter | 1.0 in |
| Orifice Coefficient | 0.600 |

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 740.00 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|--------------------------------------|--------------|
| Structure ID: TW | |
| Structure Type: TW Setup, DS Channel | |
| Tailwater Type | Free Outfall |

| | |
|-------------------------------|---------------------------|
| Convergence Tolerances | |
| Maximum Iterations | 30 |
| Tailwater Tolerance (Minimum) | 0.01 ft |
| Tailwater Tolerance (Maximum) | 0.50 ft |
| Headwater Tolerance (Minimum) | 0.01 ft |
| Headwater Tolerance (Maximum) | 0.50 ft |
| Flow Tolerance (Minimum) | 0.001 ft ³ /s |
| Flow Tolerance (Maximum) | 10.000 ft ³ /s |

Subsection: Outlet Input Data
 Label: SWMF 002 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 732.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 739.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward + Reverse | TW | 732.01 | 739.00 |
| Rectangular Weir | Weir - 1 | Forward + Reverse | TW | 738.00 | 739.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
Label: SWMF 002 OUTLET

Return Event: 100 years
Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 731.80 ft |
| Orifice Diameter | 15.8 in |
| Orifice Coefficient | 0.600 |

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 738.00 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

Subsection: Outlet Input Data
 Label: SWMF 003 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 732.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 739.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward + Reverse | TW | 732.01 | 739.00 |
| Rectangular Weir | Weir - 1 | Forward + Reverse | TW | 738.00 | 739.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
Label: SWMF 003 OUTLET

Return Event: 100 years
Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 731.80 ft |
| Orifice Diameter | 11.0 in |
| Orifice Coefficient | 0.600 |

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 738.00 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

Subsection: Outlet Input Data
 Label: SWMF 005 TO SWMF 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 729.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-------------------|---------|---------|---------|
| Culvert-Circular | Culvert - 1 | Forward + Reverse | TW | 729.00 | 737.00 |
| Rectangular Weir | Weir - 1 | Forward + Reverse | TW | 736.00 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: SWMF 005 TO SWMF 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 736.00 ft |
| Weir Length | 40.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|----------------------------------|-------------|
| Structure ID: Culvert - 1 | |
| Structure Type: Culvert-Circular | |
| Number of Barrels | 1 |
| Diameter | 18.0 in |
| Length | 330.00 ft |
| Length (Computed Barrel) | 330.00 ft |
| Slope (Computed) | 0.000 ft/ft |

| | |
|-----------------------|---------|
| Outlet Control Data | |
| Manning's n | 0.013 |
| Ke | 0.200 |
| Kb | 0.018 |
| Kr | 0.000 |
| Convergence Tolerance | 0.00 ft |

| | |
|-------------------------|--------|
| Inlet Control Data | |
| Equation Form | Form 1 |
| K | 0.0045 |
| M | 2.0000 |
| C | 0.0317 |
| Y | 0.6900 |
| T1 ratio (HW/D) | 1.095 |
| T2 ratio (HW/D) | 1.197 |
| Slope Correction Factor | -0.500 |

Use unsubmerged inlet control 0 equation below T1 elevation.
 Use submerged inlet control 0 equation above T2 elevation

In transition zone between unsubmerged and submerged inlet control,
 interpolate between flows at T1 & T2...

| | | | |
|--------------|-----------|---------|-------------------------|
| T1 Elevation | 730.64 ft | T1 Flow | 7.58 ft ³ /s |
| T2 Elevation | 730.80 ft | T2 Flow | 8.66 ft ³ /s |

Subsection: Outlet Input Data
 Label: SWMF 006 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 729.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward | TW | 729.01 | 737.00 |
| Irregular Weir | Weir - 1 | Forward | TW | 736.39 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: SWMF 006 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 728.50 ft |
| Orifice Diameter | 3.9 in |
| Orifice Coefficient | 0.600 |

Structure ID: Weir - 1
Structure Type: Irregular Weir

| Station (ft) | Elevation (ft) |
|--------------|----------------|
| 0.00 | 737.00 |
| 48.90 | 736.70 |
| 92.90 | 736.39 |
| 98.90 | 736.55 |
| 145.30 | 736.88 |
| 168.70 | 737.00 |

| | |
|------------------|-----------------------------|
| Lowest Elevation | 736.39 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|--------------------------------------|--------------|
| Structure ID: TW | |
| Structure Type: TW Setup, DS Channel | |
| Tailwater Type | Free Outfall |

| | |
|-------------------------------|---------------------------|
| Convergence Tolerances | |
| Maximum Iterations | 30 |
| Tailwater Tolerance (Minimum) | 0.01 ft |
| Tailwater Tolerance (Maximum) | 0.50 ft |
| Headwater Tolerance (Minimum) | 0.01 ft |
| Headwater Tolerance (Maximum) | 0.50 ft |
| Flow Tolerance (Minimum) | 0.001 ft ³ /s |
| Flow Tolerance (Maximum) | 10.000 ft ³ /s |

Subsection: Outlet Input Data
 Label: SWMF 007 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 739.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 741.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-------------|-----------|---------|---------|---------|
| Orifice-Circular | Orifice - 1 | Forward | TW | 739.00 | 741.00 |
| Rectangular Weir | Weir - 1 | Forward | TW | 740.00 | 741.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
 Label: SWMF 007 OUTLET

Return Event: 100 years
 Storm Event: 100YR-24HR

| | |
|----------------------------------|-----------|
| Structure ID: Orifice - 1 | |
| Structure Type: Orifice-Circular | |
| Number of Openings | 1 |
| Elevation | 739.00 ft |
| Orifice Diameter | 5.0 in |
| Orifice Coefficient | 0.600 |

| | |
|----------------------------------|-----------------------------|
| Structure ID: Weir - 1 | |
| Structure Type: Rectangular Weir | |
| Number of Openings | 1 |
| Elevation | 740.00 ft |
| Weir Length | 20.00 ft |
| Weir Coefficient | 3.00 (ft ^{0.5})/s |

| | |
|--------------------------------------|--------------|
| Structure ID: TW | |
| Structure Type: TW Setup, DS Channel | |
| Tailwater Type | Free Outfall |

| | |
|-------------------------------|---------------------------|
| Convergence Tolerances | |
| Maximum Iterations | 30 |
| Tailwater Tolerance (Minimum) | 0.01 ft |
| Tailwater Tolerance (Maximum) | 0.50 ft |
| Headwater Tolerance (Minimum) | 0.01 ft |
| Headwater Tolerance (Maximum) | 0.50 ft |
| Flow Tolerance (Minimum) | 0.001 ft ³ /s |
| Flow Tolerance (Maximum) | 10.000 ft ³ /s |

Subsection: Outlet Input Data
 Label: SWMF 010 to SWMF 006

Return Event: 100 years
 Storm Event: 100YR-24HR

| Requested Pond Water Surface Elevations | |
|---|-----------|
| Minimum (Headwater) | 729.00 ft |
| Increment (Headwater) | 0.10 ft |
| Maximum (Headwater) | 737.00 ft |

Outlet Connectivity

| Structure Type | Outlet ID | Direction | Outfall | E1 (ft) | E2 (ft) |
|--------------------|-----------|-------------------|---------|---------|---------|
| Irregular Weir | Weir - 1 | Forward + Reverse | TW | 732.70 | 737.00 |
| Tailwater Settings | Tailwater | | | (N/A) | (N/A) |

Subsection: Outlet Input Data
Label: SWMF 010 to SWMF 006

Return Event: 100 years
Storm Event: 100YR-24HR

Structure ID: Weir - 1
Structure Type: Irregular Weir

| Station (ft) | Elevation (ft) |
|-----------------|-------------------|
| 0.00 | 737.00 |
| 1.00 | 736.00 |
| 2.00 | 735.00 |
| 7.00 | 734.00 |
| 14.00 | 733.00 |
| 59.00 | 732.70 |
| 93.00 | 733.00 |
| 160.00 | 734.00 |
| 198.00 | 735.00 |
| 211.00 | 736.00 |
| 220.00 | 737.00 |

Lowest Elevation 732.70 ft
Weir Coefficient 3.00 (ft^{0.5})/s

Index

0

001 (Unit Hydrograph Summary, 100 years)...2, 3

002 (Unit Hydrograph Summary, 100 years)...4, 5

003 (Unit Hydrograph Summary, 100 years)...6, 7

005 (Unit Hydrograph Summary, 100 years)...8, 9

006 (Unit Hydrograph Summary, 100 years)...10, 11

007 (Unit Hydrograph Summary, 100 years)...12, 13

008 (Unit Hydrograph Summary, 100 years)...14, 15

010 (Unit Hydrograph Summary, 100 years)...16, 17

E

EX NOKIA 012 (Elevation vs. Volume Curve, 100 years)...18

EX NOKIA TEMP OUTLET (Outlet Input Data, 100 years)...26, 27

EX POND 010 OUTLET (Outlet Input Data, 100 years)...28, 29

S

SWMF 001 (Elevation vs. Volume Curve, 100 years)...19

SWMF 001 OUTLET (Outlet Input Data, 100 years)...30, 31

SWMF 002 (Elevation vs. Volume Curve, 100 years)...20

SWMF 002 OUTLET (Outlet Input Data, 100 years)...32, 33

SWMF 003 (Elevation vs. Volume Curve, 100 years)...21

SWMF 003 OUTLET (Outlet Input Data, 100 years)...34, 35

SWMF 005 (Elevation vs. Volume Curve, 100 years)...22

SWMF 005 TO SWMF 006 (Outlet Input Data, 100 years)...36, 37

SWMF 006 (Elevation vs. Volume Curve, 100 years)...23

SWMF 006 OUTLET (Outlet Input Data, 100 years)...38, 39

SWMF 007 (Elevation vs. Volume Curve, 100 years)...24

SWMF 007 OUTLET (Outlet Input Data, 100 years)...40, 41

SWMF 010 (Elevation vs. Volume Curve, 100 years)...25

SWMF 010 to SWMF 006 (Outlet Input Data, 100 years)...42, 43

U

UPDATED 100YR 12HR-48HR (Time-Depth Curve, 100 years)...1

EXHIBIT 3A

FLOODPLAIN FILL & CUT CALCULATIONS

Job #: 402138
Project: Naper Commons - Naperville

Date: October 13, 2020
Revised:
By: ARF

| FLOODPLAIN FILL CALCULATIONS | | | | |
|-------------------------------------|--------------------|-------------------|---|--|
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 737.6 | 0 | 0.000 | 0.000 | 0.000 |
| 738.0 | 820 | 0.019 | 0.004 | 0.004 |
| 739.0 | 1640 | 0.038 | 0.028 | 0.032 |
| 739.5 | 2410 | 0.055 | 0.023 | 0.055 |
| | | | | |

<- Ex. 10-yr BFE

<- Ex. 100-yr BFE

Job #: 402138
 Project: Naper Commons - Naperville

Date: October 13, 2020
 Revised:
 By: ARF

| FLOODPLAIN CUT CALCULATIONS | | | | |
|------------------------------------|--------------------|-------------------|---|--|
| ELEV. | AREA (S.F.) | AREA (AC.) | INCREM. VOLUME (AC. Ft.) | CUMULATIVE VOLUME (Ac-Ft) |
| 737.6 | 0 | 0.000 | 0.000 | 0.000 |
| 738.0 | 1900 | 0.044 | 0.009 | 0.009 |
| 739.0 | 2730 | 0.063 | 0.053 | 0.062 |
| 739.5 | 3190 | 0.073 | 0.034 | 0.096 |
| | | | | |

<- Ex. 10-yr BFE

<- Ex. 100-yr BFE

Job #: 402138
 Project: Naper Commons - Naperville

Date: October 13, 2020
 By: ARF

Floodplain Compensatory Storage Summary - Naper Commons

| | 10-Year WSEL | 0-10 Vol. Filled (Ac-ft) | 100-Year WSEL | 10-100 Vol. Filled (Ac-ft) | 10-Year WSEL | 0-10 Vol. Cut (Ac-ft) | 100-Year WSEL | 10-100 Vol. Cut (Ac-ft) |
|-------|-----------------|-------------------------------------|------------------|---------------------------------------|-----------------|----------------------------------|------------------|------------------------------------|
| EXIST | 737.6 | 0.000 | 739.5 | 0.055 | 737.6 | 0.000 | 739.5 | 0.096 |
| PROP | - | | - | | | | | |
| | | | | | | | | |
| | | | | | | | | |

Total 0-10 Floodplain Fill from Project (Ac-ft): 0.000
Total 10-100 Floodplain Fill from Project (Ac-ft): 0.055

Total 100-Year Floodplain Fill from Project (Ac-ft): 0.055

Total 0-10 Floodplain Cut from Project (Ac-ft): 0.000
Total 10-100 Floodplain Cut from Project (Ac-ft): 0.096

Total 100-Year Floodplain Cut from Project (Ac-ft): 0.096

10-100 Year Cut/Fill Ratio Required: 1.0
10-100 Year Cut/Fill Ratio Provided: 1.7

Total 100-Year Cut/Fill Ratio Required: 1.5
Total 100-Year Cut/Fill Ratio Provided: 1.7

TAB 4

WETLAND ASSESSMENT

EXHIBIT 4A

**WETLAND DELINEATION &
ASSESSMENT REPORT**

BY V3 COMPANIES OF ILLINOIS, LTD.

(UNDER SEPARATE COVER)

**ELECTRONIC COPIES OF PONDPACK
MODELS**