

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Elegantly designed with visual-comfortable illumination performance
- Type III and V distribution with dark sky compliant option
- Optional -20°C emergency battery backup driver
- IK08 vandal resistant lens and housing


TECHNICAL SUMMARY

SIZE:	24" and 42" Overall height
WATTAGE:	30/25/18/12W
LUMEN/EFFICACY* (T3/T5)	2500/2100/1500/1000LM, 85LM/W
LUMEN/EFFICACY* (D3/D5)	2400/2000/1400/950LM, 80LM/W
LUMEN/EFFICACY* (G5/L5)	G5: 0.8 multiplier of T3/T5 or D3/D5, L5: 0.4 multiplier of T3/T5 or D3/D5
INPUT VOLTAGE	120-277Vac, 120Vac for GFCI, 277-480Vac
AVAILABLE CCT/CRI	30/40/50K changeable, MTO: 2700K, 3500K, 80+CRI standard
CONTROL	On/off with 0-10V driver no dimming wires, On/Off button photocell optional
VALIDATIONS	ETL and cETL wet location listed, IP65 and IK08 rated, Dark sky compliant (D3/D5 option), FCC, RoHS
LIFETIME	L70>100,000 hours, 5 year warranty
DISTRIBUTION	Type V, Type III, Type V with Louver & Frosted PC Lens optional, Type V with frosted PC Lens optional, House Side Shield optional
OPERATION TEMP.	-40°F ~ 122°F / -4°F ~ 122°F (with EM)
FINISH	Matte Black (BK), Dark Bronze (DB), Silver Gray (SG), Matte White (WH) Premium finish: Pine Green (PG), Corten Brown (CB) Premium Wood finishes: Walnut Wood (dark), Cherry Wood (brown), Oak Wood (light)


*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

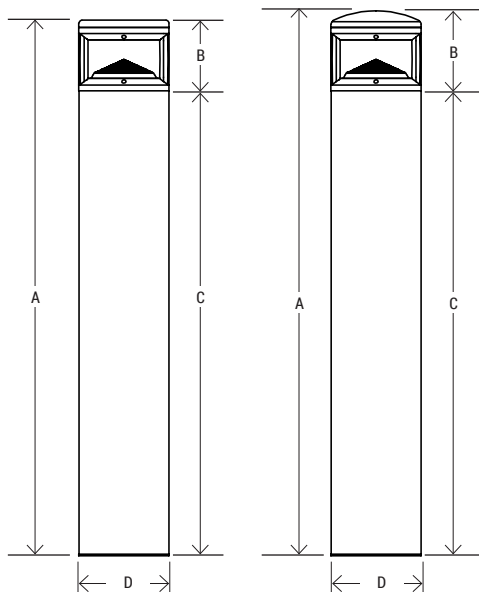

Model No.	A HEIGHT	B HEAD	C BODY	D DIAMETER	WEIGHT
BRA-F24	24"	5.6"	18.4"	7.1"	13 lbs
BRA-C24	24.7"	6.3"	18.4"	7.1"	14 lbs
BRA-F42	42"	5.6"	36.4"	7.1"	18 lbs
BRA-C42	42.7"	6.3"	36.4"	7.1"	19 lbs

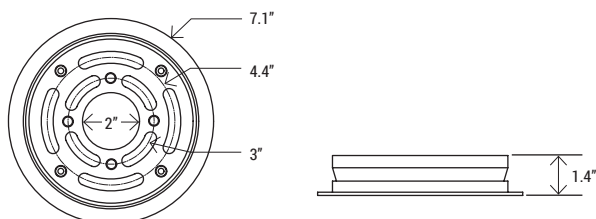


Architectural Round Bollard

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

[illegible][illegible]


*Available accessories sold separately

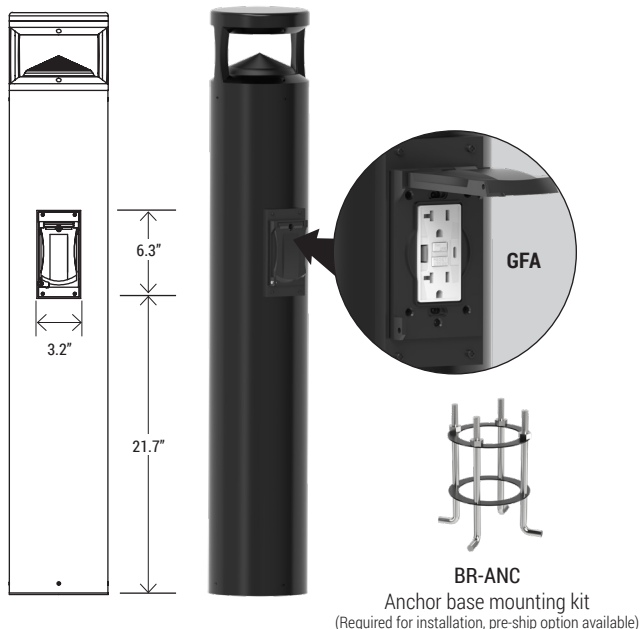


*Accessories

BR-ANC - Anchor base mounting kit (Required for installation, pre-ship option available)

STANDARD COLOR




Dark Bronze



Matte Black




Silver Gray




Matte White

PREMIUM COLOR



Pine Green



Corten Brown

PREMIUM HEAT-TRANSFER WOOD FILM BODY FINISH*



WW
Walnut wood
dark finish



BW
Cherry wood
brown finish



OW
Oakwood light
finish

SPECIFICATIONS

CONSTRUCTION

Low copper aluminum alloy die-cast top with extruded aluminum body

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating. T5 and T3 comes with a cone same color as the housing. D5 and D3 comes with a pitch black cone for zero uplight.

OPTICS/DIFFUSER

Injection molded optic with UV proof PC lens available in Type III or Type V distribution.

ELECTRICAL

Long life LED system, Outdoor rated LED driver that accommodates input voltages of 120-277Vac or 277-480Vac, at 50/60Hz with 0-10v dimming control function, CCT changeable.

MOUNTING

Anchor based mounting (anchors sold separately)

VALIDATIONS

ETL and cETL wet location Listed, IP65 and IK08 rated, Dark sky compliant optional (D3/D5), FCC, RoHS

MODERN

Architectural Post Top Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Architectural designed PTM is a elegant sculpture by day and a beacon of comfort by night.
- Available in Type II, III, IV and V zero up-light distribution
- Die-cast aluminum tool-less entry housing rated IP65 and IK08
- Provides up to 30,000 of visual comfortable lumen output
- Can be pole top, pole side and wall mounted


TECHNICAL SUMMARY

WATTAGE:	50W, 80W, 150W, 165W, 200W
LUMEN/EFFICACY*	6000LM, 10000LM, 18000LM, 24000LM, 30000LM, custom / 120-125LM/W
INPUT VOLTAGE	120-277Vac or 277-480Vac
AVAILABLE CCT/CRI	3000K, 4000K, 5000K / 80CRI standard, 90CRI optional
CONTROL	On/off with 0-10V driver no dimming wires Bi-level microwave motion sensor 7-pin receptacle with photocell
VALIDATIONS	ETL & cETL wet location Listed, IP65 and IK08 rated, DLC premium listed, DLC Luna listed, IDA dark sky compliant, FCC, RoHS
LIFETIME	L70>100,000 hours, 5 year warranty
DISTRIBUTION & DIFFUSION	Type II, III, IV and V distribution
SURGE PROTECTION	10Kv/5Ka
OPERATION TEMP.	-40°F ~ 122°F
FINISH	Standard: Dark Bronze, Silver Gray, Matte Black, Matte White Premium: Pine Green, Corten Brown

*Delivered lumen may vary, refer to photometric for full performance data




DIMENSIONS

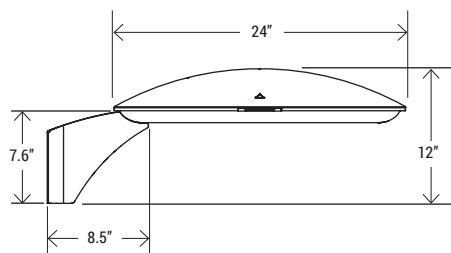


PTM (AM)

EPA: 0.7 ft² / Weight: 30 lbs

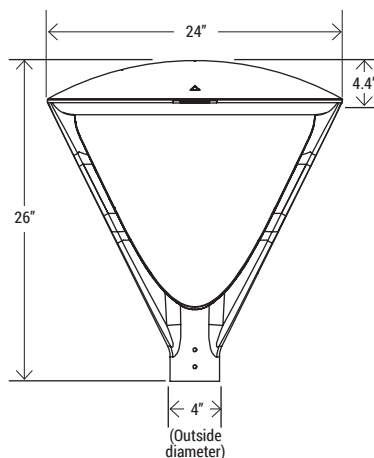

PTM (PM)

EPA: 0.7 ft² / Weight: 30 lbs

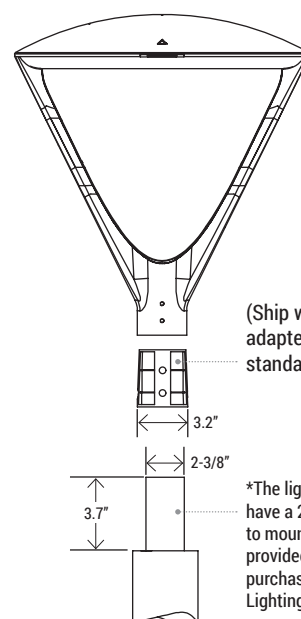

(Ship with a removable adapter to slip fit onto standard 2-3/8 tenon)

*The light pole will need to have a 2-3/8 tenon in order to mount post top, it is either provided by other or can be purchased through Spitzer Lighting.

MODERN

Architectural Post Top Luminaire


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

Series	Lumen Package	Input Voltage	CCT	Light Distribution	Lens & Diffusor Type	Control	Finish	Mounting
PTM	60L - (6,000LM/50W) 100L - (10,000LM/80W) 180L - (18,000LM/150W) 240L - (24,000LM/165W) 300L - (30,000LM/200W)	U - (120-277Vac) H - (277V-480Vac)	30K - (3000K) 40K - (4000K) 50K - (5000K)	T2 - (Type II) T3 - (Type III) T4 - (Type IV) T5 - (Type V)	FR - (Solite lens)	C1 - (On/Off with 0-10V Driver No Dimming Wires) C2 - (7-Pin Receptacle with Short Cap)* C3 - (7-Pin Receptacle with Photocell)* CMM - (0-10V Bi-Level Microwave Motion Sensor)*	BK - Matte Black DB - Dark Bronze SG - Silver Gray WH - Matte White PG - Pine Green* CB - Corten Brown*	PM - (Post top mount) AM - (Wall/pole arm mount)

*AVAILABLE ACCESSORIES:

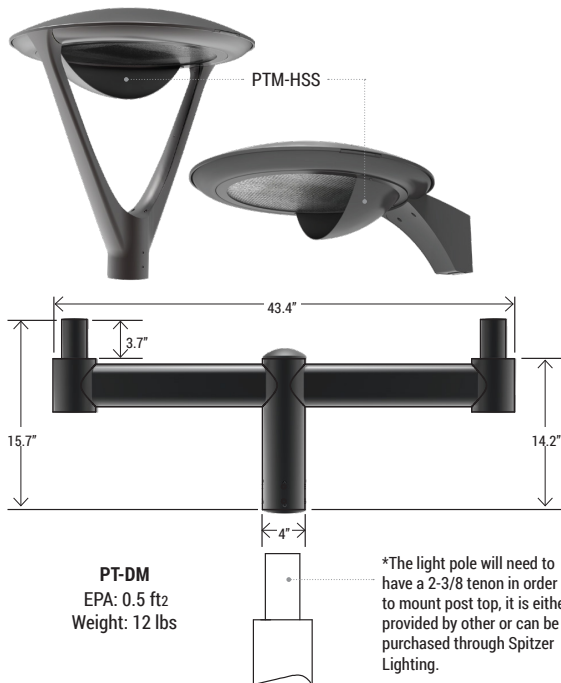

PTM-PM
Post top mount bracket



PTM-AM
Wall/Arm mount bracket

*Accessories

PT-DM-BK/DB/SG/WH/PG/CB - Pre-wired post top dual mount bracket
PTM-HSS-BK/DB/SG/WH/PG/CB - House side shield
PTM-CPP - Pre Install 0-10V dimming wires

*Available accessories sold separately

FINISH REFERENCE


Standard




Dark Bronze



Silver Gray



Matte Black




Matte White

Premium



Pine Green*



Corten Brown*

SPECIFICATIONS

CONSTRUCTION

Die-cast aluminum housing with a impact proof solite diffused glass Lens, fully gasketed with tubular silicone gasket and tool-less entry into driver compartment for maintenance.

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating.

OPTICS/DIFFUSER

Optic are injection molded PC with solite diffused glass LED lens providing type II, III, IV and V distribution.

ELECTRICAL

Long life LED system, Outdoor rated Class constant current 0-10V dimmable driver, Line voltage 120-277Vac or 277-480vac, motion sensor and photocell option available.

MOUNTING

Post-top mount (PM) for top mount, optional dual post mount with (PT-DM) bracket onto 2-3/8" tenon. Arm mount (AM) for pole side mount and wall mount.

VALIDATIONS

ETL & cETL wet location Listed, IP65 and IK08 rated, DLC premium listed, DLC Luna listed, IDA dark sky compliant, FCC, RoHS
 Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification

MODERN

Architectural Post Top Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



DLC Listed
Visit <https://www.designlights.org/qpl> to confirm qualification.)

SPITZER MODEL NUMBER	DLC PRODUCT ID
PTM-180L-H-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-06C444
PTM-60L-U-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-06C56K
PTM-100L-U-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-0CF1DL
PTM-100L-H-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-1PPCD8
PTM-180L-H-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-2JHQ24
PTM-100L-U-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-4Q94CG
PTM-300L-H-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-532QYF
PTM-120L-U-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-5JD8HS
PTM-120L-U-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-5PHNJ2
PTM-300L-H-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-635RZR
PTM-300L-U-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-6LFD7V
PTM-180L-H-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-7R09MR
PTM-60L-U-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-85XF66
PTM-100L-U-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-8JHJR8
PTM-100L-H-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-8KK2RL
PTM-60L-U-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-B5GGK6
PTM-180L-H-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-B6TNN2
PTM-180L-U-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-CG9M3M
PTM-120L-U-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-DRQ24D
PTM-100L-H-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-DX4G78
PTM-180L-U-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-DZLDD2
PTM-300L-H-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-FDC3KD
PTM-60L-H-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-FYDNS4
PTM-180L-H-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-FZWCMG
PTM-120L-U-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-GGDS67
PTM-60L-U-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-GJCHRZ
PTM-180L-U-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-GL8BBZ
PTM-60L-U-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-H4RRJV
PTM-120L-H-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-H5Z426

SPITZER MODEL NUMBER	DLC PRODUCT ID
PTM-300L-U-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-J8JCNR
PTM-300L-U-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-JRC9YR
PTM-300L-H-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-JWZ054
PTM-120L-H-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-K493B8
PTM-100L-H-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-KC0TDY
PTM-100L-U-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-KVDKZ6
PTM-300L-H-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-MM2QJB
PTM-60L-H-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-N08XYH
PTM-180L-U-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-N370XQ
PTM-120L-H-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-N6Y75K
PTM-300L-H-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-NM2KMD
PTM-180L-H-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-NN2GX3
PTM-180L-U-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-PTFGB9
PTM-120L-H-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-PX2GF4
PTM-60L-H-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-QW65DV
PTM-100L-U-30K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-R644Y6
PTM-180L-U-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-RPMGPW
PTM-100L-H-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-S2J4FY
PTM-300L-U-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-T01G4D
PTM-60L-H-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-TD3S4S
PTM-120L-U-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-V1C23S
PTM-60L-U-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-VV04D8
PTM-60L-H-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-VV0D2D
PTM-100L-U-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-X7FXMQ
PTM-120L-H-40K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-XD7LRH
PTM-300L-U-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-XKK1MX
PTM-120L-H-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-Y4S203
PTM-60L-H-50K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-Y807PB
PTM-100L-H-50K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-YB830P
PTM-300L-U-40K-T3-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-ZH7HF4
PTM-120L-U-30K-T5-FR-[C1,C2,C3,C4]-[ALL FINISHES]-[PM,AM]	S-ZL2R91