


O N. RIVER ROAD BUILDING F PHOTOMETRIC

Designer RT Date 09/25/2024 Scale Not to Scale Drawing No.

Summary

1 of 1

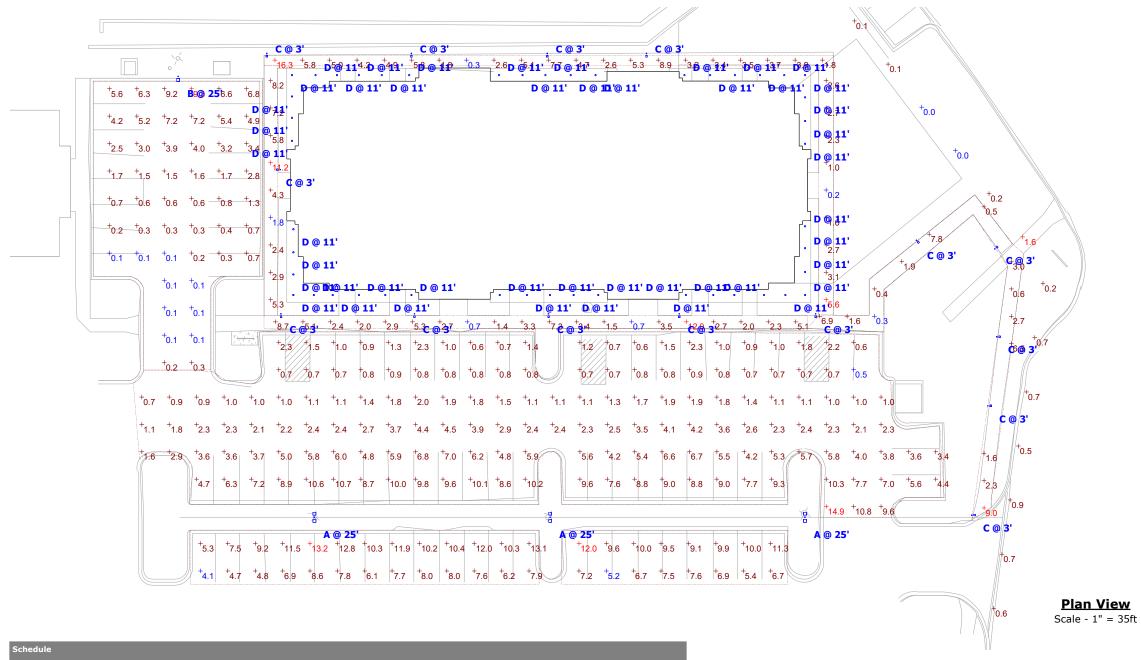

Symbol	Label	Image	Quantity	Manufacturer	Catalog Number	Description	Number Lamps	Lumens Per Lamp	Light Loss Factor	Wattage	Plot
0.0	A		3	COOPER LIGHTING SOLUTIONS - STREETWORKS (FORMERLY EATON)	TRU40SXX2F	ARCHITECTURAL AREA LUMINAIRE - TYPE	1	50000	0.8	930	Max: 37908cd
	В		1	COOPER LIGHTING SOLUTIONS - STREETWORKS (FORMERLY EATON)	TRU40SXX2F	ARCHITECTURAL AREA LUMINAIRE - TYPE	1	50000	0.8	465	Max: 37908cd
	С		15	COOPER LIGHTING SOLUTIONS - McGRAW- EDISON (FORMERLY EATON)	BSC-XX-70-HPS	70W HPS SQUARE ARCHITECTURAL BOLLARD - SYMMETRIC DISTRIBUTION	1	5800	0.8	88	Max: 820cd
	D		46	Lithonia Lighting	WF6 LED 35K	6" Ultra-Thin LED Wafer Downlight, 3500K CCT, 120V	1	1159	0.8	13.4	Max: 457cd

Statistics												
Description	Symbol	Avg	Max	Min	Avg/Min	Max/Min						
Main Parking Lot	+	3.6 fc	14.9 fc	0.5 fc	7.2:1	29.8:1						
North Walkway	+	4.8 fc	16.3 fc	0.3 fc	16.0:1	54.3:1						
North-West Parking Lot	+	2.4 fc	9.3 fc	0.1 fc	24.0:1	93.0:1						
South-East Parking	+	8.4 fc	12.0 fc	5.2 fc	1.6:1	2.3:1						
South-East Walkway	+	2.4 fc	5.6 fc	0.2 fc	12.0:1	28.0:1						
South-West Parking	+	8.7 fc	13.2 fc	4.1 fc	2.1:1	3.2:1						
South-West Walkway	+	3.2 fc	9.0 fc	0.3 fc	10.7:1	30.0:1						
South Walkway	+	3.8 fc	12.0 fc	0.7 fc	5.4:1	17.1:1						
West Walkway	+	5.5 fc	11.2 fc	1.8 fc	3.1:1	6.2:1						
Property Line		0.2 fc	1 6 fc	0.0 fc	NI/A	NI/A						