


City of Naperville

Naper Settlement – Porter Ave Parking Lot

Replace sidewalk square, adjacent curb & gutter, resurface (2" mill) and stripe

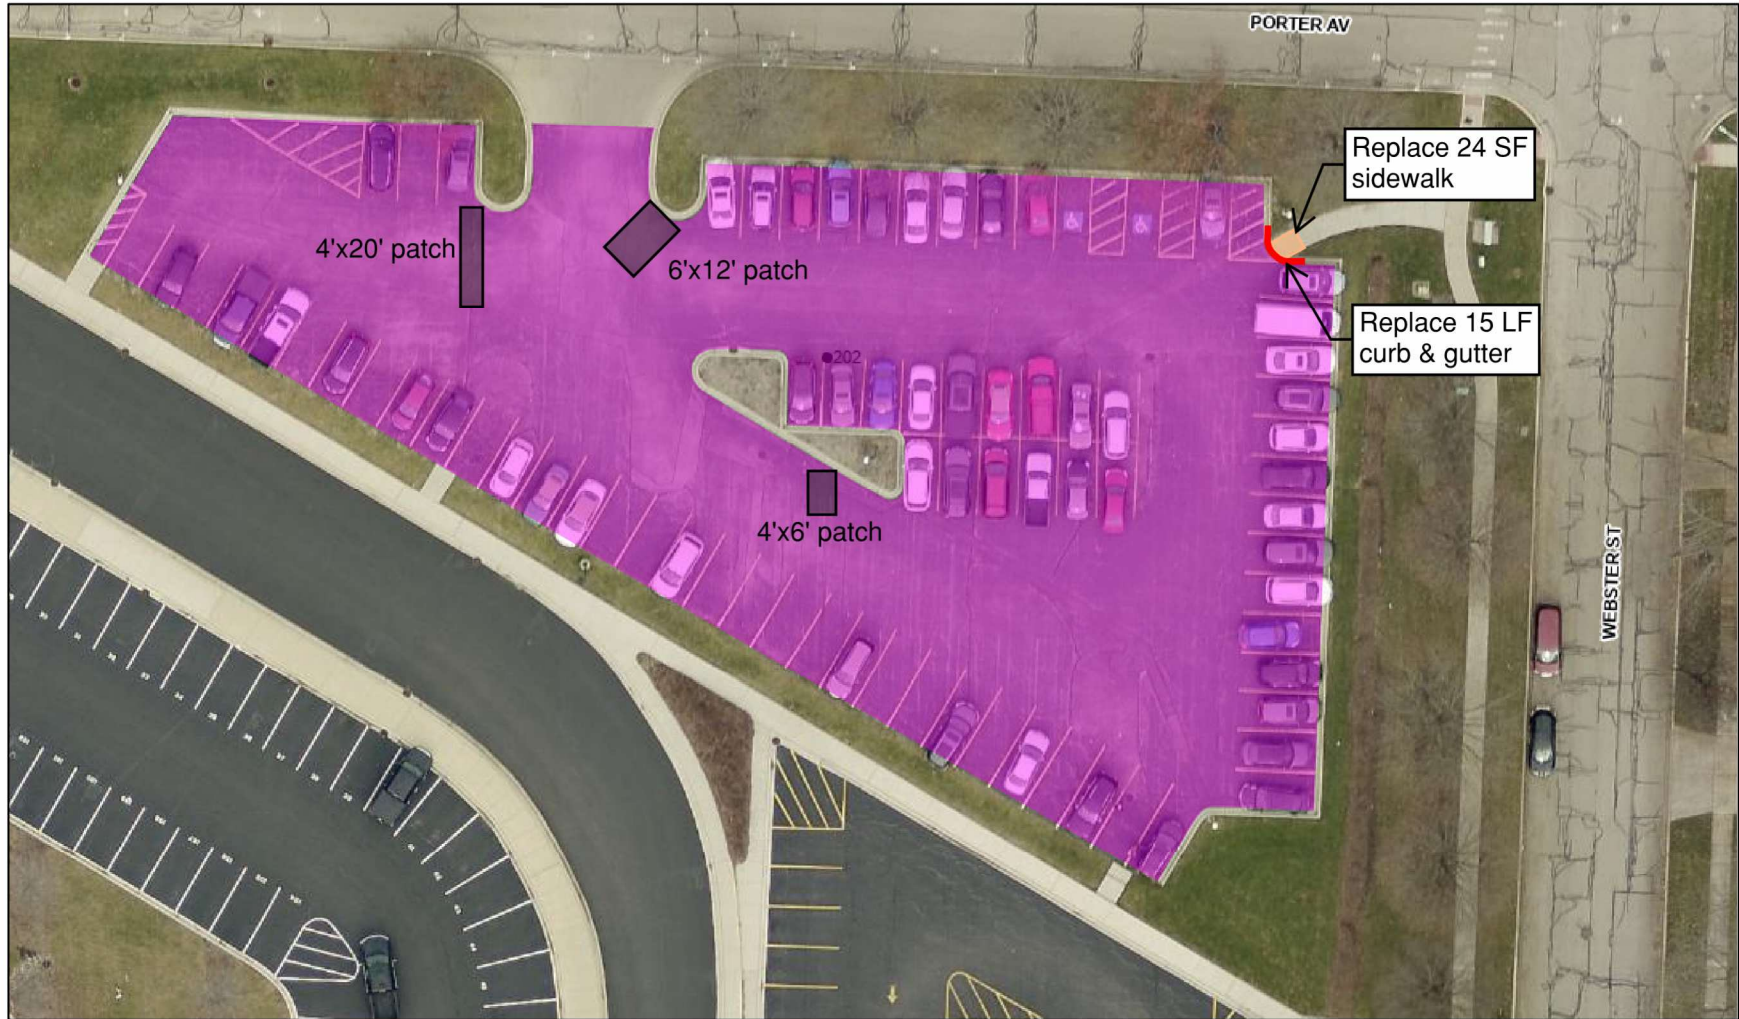

Resurface 3070 SY asphalt

4" Yellow = 1470 LF

Handicap Accessible Stall = 3 EACH

Patches shown will be evaluated once the surface has been milled. If necessary, contractor to perform additional 2" mill to address degraded pavement section.

Porter Av Parking Lot - Estimate

Pay Item	Unit	DENLER		
		Unit Price	Quantity	Total:
HMA SURFACE REMOVAL, COLD MILL, 2"	SQ YD	\$ 2.47	3070	\$ 7,582.90
BITUMINOUS MATERIALS (PRIME COAT)	LB	\$ 0.75	1535	\$ 1,151.25
HMA SURFACE COURSE, MIX D, N50	TON	\$ 185.00	354	\$ 65,490.00
PAINT PAVEMENT MARKING LINE, 4 INCH	FT	\$ 0.43	1470	\$ 632.10
PAINT PAVEMENT MARKING, ACCESSIBLE STALL	EACH	\$ 50.00	3	\$ 150.00
CLASS D PATCHES, 2"	SQ YD	\$ 102.00	20	\$ 2,040.00
PCC SIDEWALK REMOVAL	SQ FT	\$ 3.47	24	\$ 83.28
PCC SIDEWALK, 4"	SQ FT	\$ 14.45	24	\$ 346.80
COMBINATION CURB AND GUTTER REMOVAL	LF	\$ 10.50	15	\$ 157.50
COMBINATION CONCRETE CURB AND GUTTER	LF	\$ 75.80	15	\$ 1,137.00
CURB LINE SAWCUT AND GROUT	LF	\$ 45.00	15	\$ 675.00

Total: \$ 79,445.83