REVISION TO PERMIT AT
215 S. WASHINGTON ST. NAPERVILLE, IL

SCOPE OF WOK:
- REMOVE AS PER FIELD, R-0
- PROVIDE (3) COMPARTMENT SINK, MOP BASIN, HANDSINK IN RSMT.
- ALL OTHERS WORKS TO REMAIN AS IS NO CHANGE

PLUMBING FIXTURE COUNT

FLOOR	WC	LAV.	MOP	SHOWER	SINK	DW.	TANKLESS	TOTAL
FIRST	1	1	1	0	1	0	0	
BASE					1			
TOTAL	1	1	1	0	2	0	0	5
TOTAL PLUMBING FIXTURES =								5
FULL	4	2	4	2	2	0	0	15.0
TOTAL WSFU =								15.0
DEMAND =								46.6 GPM
CW SERVICE:								EXISTING
CW BOOSTER PUMP UNIT: NONE								

PLUMBING NOTES

1. CONTRACTOR SHALL VERIFY THE CONDITION AND ROUTING OF PIPING SYSTEMS SO THAT WORK CAN BE INSTALLED WITHOUT INTERFERENCE WITH OTHER TRADES. MINIMUM ROUTING, PITCHING, AND SETBACKS AS NOTED AND AS REQUIRED.
2. ALL WORK SHALL MEET CITY CODE.
3. CONTRACTOR SHALL PROVIDE ALL NECESSARY WATCHING, CUTTING, EXCAVATION, AND BACKFILL FOR THE INSTALLATION OF THE WORK.
4. ALL SANITARY PIPING BELOW GROUND SHALL BE SERVICE WEIGHT CAST IRON PIPE WITH CALULED JOINTS. PIPE SIZES 4" AND SMALLER COULD BE TYPE 'L' COPPER WITH SOLDERED JOINTS.
5. DOMESTIC HOT AND COLD WATER PIPING SYSTEMS SHALL BE TYPE 'L' COPPER AND INSULATED WITH 1" THICK, 0.5 LB DENSITY FIBERGLASS INSULATION OF LUMINFREE JACKET. TAPE ALL JOINTS WITH SAME FACING MATERIAL.
6. PROVIDE COMPLETE NEW SANITARY, VENT, PIPING SYSTEM FOR THE PROJECT, INCLUDING ALL NECESSARY PIPING, VENT PIPING, FITTINGS, FLOOR DRAINS, PLUMBING FIXTURES, TRAPS, CW. PIPING, AND FINAL CONNECTION TO ALL FIXTURES.
7. PROVIDE COMPLETE NEW DOMESTIC WATER DISTRIBUTION PIPING SYSTEMS FOR ALL PLUMBING FIXTURES AND INCLUDING ALL FINAL CONNECTIONS TO ALL KITCHEN EQUIPMENT AS LISTED
8. PROVIDE SHUTOFF VALVE AT EACH OF THE WATER CONNECTIONS TO EACH PLUMBING FIXTURE AND EACH PIECE OF KITCHEN EQUIPMENT.
9. SHUT VALVES AT EACH BRANCH PIPE SHALL BE MINIMUM GATE PER SPECIFICATIONS.
10. PROVIDE ALL NECESSARY PIPING TESTS AS REQUIRED.
11. PLUMBING FIXTURES SHALL BE AS INDICATED.
12. PROVIDE GREASE TRAP AS INDICATED. UNIT SHALL BE CONSTRUCTED IN ACCORDANCE TO CODE.
13. PER NAPERVILLE TITLE 9 AMENDMENT, ALL PLUMBING FIXTURES SHALL BE WaterSense COMPLIANT.

FLOOR DRAINS:
FD1 DUCO CAST IRON BODY, OPEN SIGHT FUNNEL, NICKEL BRONZE STRAINER, WEDGEIT BUCKET, J.A. SMITH FIGURE 2010

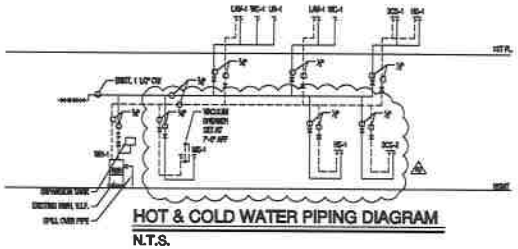

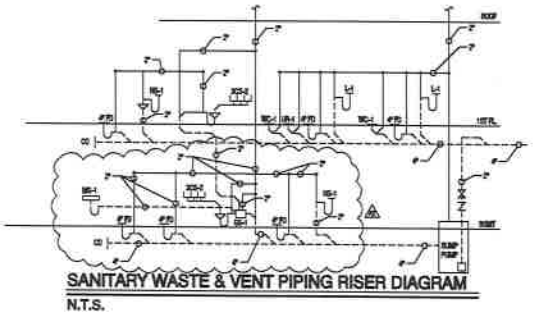

PLUMBING SYMBOLS LIST:

C.W.	DOMESTIC COLD WATER
H.W.	DOMESTIC HOT WATER
S.S.S.	SANITARY SEWER (UNDERGROUND)
V.	VENT PIPE (SUSPENDED)
G.V.	GATE VALVE
C.V.	CHECK VALVE

W.C. WATER CLOSET
LAV. LAVATORY
F.C.O. FLOOR CLEAN OUT
F.D. FLOOR DRAIN
C.O. CLEAN OUT

PLUMBING FIXTURE SCHEDULE

FIXTURE	MFR. & MODEL	DRAIN	VENT	C.W.	H.W.	SPECIFICATIONS
WC-1: WATER CLOSET	AMERICAN STANDARD 2886.101	3"-0"	2"-0"	0'-0 3/4"	-	TWO PIECE TOILET FLOOR MTD., TANK VALVE. ELONGATED TOILET SEAT WITH LID.
LAV-1: LAVATORY	AMERICAN STANDARD 0-141.211	0'-1 1/2"	0'-1 1/4"	0'-0 1/2"	0'-0 1/2"	WHEELCHAIR USERS LAVATORY, WALL MTD., COUNTERTOP TO BE STONE, LEVER TYPE FAUCETS.
FD-1: FLOOR DRAIN	J.R. SMITH 2010-6	0'-0"	0'-0"	-	-	CAST IRON BODY AND FLASHING COLLAR, 12" SQUARE TOP HEAVY DUTY GRATE, WEDGEIT BUCKET
MH-1: SERVICE SINK	MUSSER MODEL 4564	0'-1 1/2"	0'-1 1/4"	0'-0 1/2"	0'-0 1/2"	FLOOR MTD.
FCO: FLOOR CLEAN OUT	J.R. SMITH 4020-P SERIES	0'-0"	-	-	-	ECONA HEAVY DUTY CAST IRON ADJUSTABLE SCORIATED SECURED COVER, WITH ASS PLUG.
GREASE INTERCEPTOR	ROCKFORD S-HH-LCW	0'-0"				25 GPM FLOW, 20 GALLON LIQUID HOLDINGS, CAPACITY 104 LBS GREASE SLUDGE, 3" INLET, OUTLET MOUNTED ON THE FLOOR W/ GASKETED AIR TIGHT COVER.

NOTES: 1. ALL FIXTURES, EQUIPMENT, TRIM, FITTINGS, ETC. SHALL COMPLY WITH LOCAL, STATE AND/OR FEDERAL REGULATIONS AND CODES, INCLUDING BUT NOT LIMITED TO WATER AND ENERGY CONSERVATION CODES

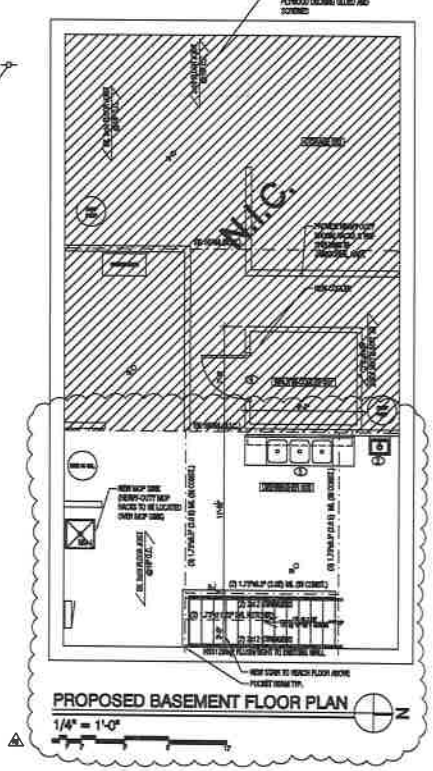

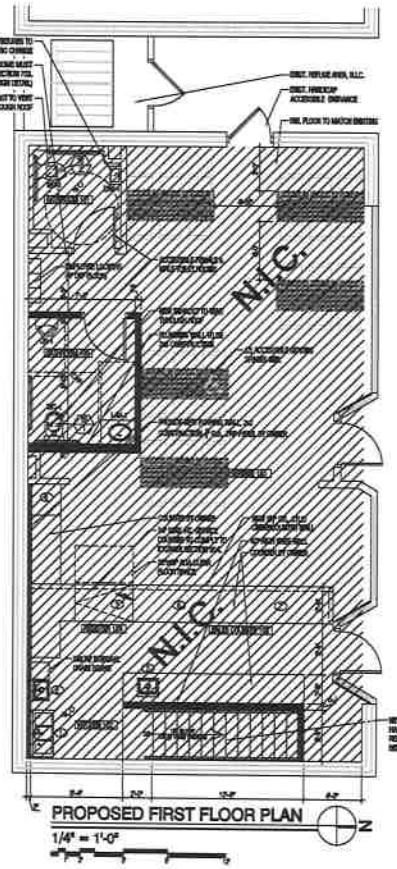

ROOM FINISH SCHEDULE

ROOM #	ROOM NAME	FLOOR	WALLS NORTH		WALLS SOUTH		WALLS EAST		WALLS WEST		CEILING		NOTES
		MATL.	FIN.	MATL.	FIN.	MATL.	FIN.	MATL.	FIN.	MATL.	FIN.		
100	DINING ROOM	D	1	R	4	R	4	R	4	P	7		
101	WALK-IN COOLER	-	-	-	-	-	-	-	-	P	7		
102	STORAGE	D	1	R	4	R	4	R	4	P	7		
103	STORAGE	D	1	R	4	R	4	R	4	P	7		
120	VESTIBULE	D	1	D	1	D	1	D	1	P	7		
121	BATHROOM	D	1	D	1	D	1	D	1	P	7		
122	KITCHEN	D	1	R	4	R	4	R	4	P	7		
123	SALAD COUNTER	D	1	D	1	D	1	D	1	P	7		
124	HEIGHTER	-	-	-	-	-	-	-	-	-	-		
125	BATHROOM	D	1	D	1	D	1	D	1	P	7		
-	CONSUMER AREA	D	1	D	1	D	1	D	1	P	7		

FINISH SCHEDULE KEY

MATERIAL
A. CONCRETE
B. CARPET
C. 12"x12" QUARRY TILE
D. 6"x6" CERAMIC TILE
E. 4"x4" CERAMIC TILE
F. VINYL COMPOSITION TILE
G. GYPSUM BOARD
H. CONCRETE BLOCK
I. STONE/TILE
J. RESILIENT VINYL BASE
K. WOOD BASE
L. CERAMIC TILE BASE
M. EXPOSED STRUCTURE
N. MEDIUM CHECKPLATE
O. SUSPENDED ACOUSTIC TILE
P. SUSPENDED GYP. BD. CEILING
Q. 4' P. RUBBER WALL GUARD
R. FRP PANELS (COLOR BY OWNER)

FINISH
1. SMOOTH
2. PAINT
3. TYPE, BRAND & PAINT (BY OWNER)
4. FACTORY FINISH
5. WAX
6. STAIN
7. GLOSS PAINT

KITCHEN EQUIPMENT SCHEDULE

TAG	ITEM	REMARKS
1	TRIPLE SINK	
2	HANDWASH	WALL MOUNTED
3	HEIGHTER	
4	WALK-IN COOLER	
5	TRIPLE SINK	
6	SANDWICH REFRIGERATOR	
7	FOOD PREP TABLE	
8	HEIGHTER REFRIGERATOR	

LEGEND:
- NEW FRAMED WALL
- NEW CEMENT, STUCCO WALL NOTED ON PLANS
- NEW BOARD WALL NOTED ON PLANS
- NEW BRICK WALL OR INFILL NOTED ON PLANS
- NEW FULL WALL OR INFILL NOTED ON PLANS
- EXISTING VENEER BRICK WALL - NO CHANGE
- AREA NOT IN CONTRACT - NO CHANGE
- EXISTING FULL WALL - NO CHANGE
- EXISTING INTERIOR WALL - NO CHANGE
- EXISTING WALL TO BE DEMOLISHED

NOTE:
ALL CHEMISTRY & LOCKERS TO FIXTURE 6" STAINLESS STEEL LEGS OR OPEN-TO-FLOOR DESIGN.

NOTE:
ALL DIMENSIONS AND PROPOSED CONDITIONS TO BE V.I.F.

NOTE:
CONTRACTOR SHALL BE RESPONSIBLE FOR REVIEWING ALL PLANS AND SPECIFICATIONS WITHIN ALL EXISTING CONDITIONS PRIOR TO PROCEEDING WITH CONSTRUCTION AND NOTIFYING ARCHITECT IMMEDIATELY OF ALL DISCREPANCIES OR CONFLICTS. ARCHITECT IS NOT RESPONSIBLE FOR OMISSIONS FROM THE ORIGINAL DRAWINGS.

DOB APPROVAL STAMPS

INTERIOR RESTAURANT BUILD OUT
AT 215 S. WASHINGTON ST.
NAPERVILLE, IL

REVISIONS		
DATE	DESCRIPTION	
5/5/17	R1 - PER CLIENT REV.	
5/5/17	R1 - PER BLDG DEPT	
5/14/17	R2- PER HEALTH DEPT	
11/29/17	R3- AS BUILD	

PROPOSED FLOOR PLANS, DETAILS

DATE:
PROJECT:
SHEET NO: A1

BUGAJ ARCHITECTS
1223 N MILWAUKEE SUITE 200 CHICAGO, IL 60642 TEL: 773-866-5655 E-MAIL: MAIL@BUGAJARCHITECTS.COM WEB: WWW.BUGAJARCHITECTS.COM